





Robust. Reliable. Safe.





Overview

Established in 1920, Clipsal by Schneider Electric is Australia's number one brand of electrical products, accessories and solutions for the residential, data, industrial, home control and management markets. Throughout our history, Clipsal has evolved and grown from its Adelaide base with great success by supporting our local economy and providing products manufactured at multiple sites across Australia. In our role as an industry leader, Clipsal is dedicated to supplying you with the most innovative and sustainable solutions available. As part of Schneider Electric, the global specialist in energy management, Clipsal provides a total electrical solution for any project or application.

clipsal.com

The Clipsal Metal Plate range is designed to accommodate the needs of the high-end residential and commercial markets. Available in stainless steel and polished brass, with the options of 'A' (curved) and 'B' (flat) styles, as well as many custom made formats. The Metal Plate range offers a comprehensive selection to meet any project specifications, and is the ideal choice for premium metal switch and power outlet solutions.



Both stainless steel and brass models offer the option of either 'A' or 'B' style plates. 'A' style plates have curved edges, providing a similar appearance to Clipsal Standard products, and 'B' style plates have a low profile appearance that is suitable for a wide range of applications.

For high security applications, Clipsal also offers robust Metal Plate Security Solutions, that provide innovative options, such as tamper proof screws and lockable outlets. So, if you require metal plate switches or power outlets ok no further than Clipsal's Metal Plate range.



Approvals and Certification

To assist meeting particular requirements, a selection of products from the Clipsal Metal Plate range has been approved and carry the Regulatory Compliance Mark (RCM).



Stainless Steel Solutions

Switches and sockets with a stylish, premium metal finish.



Polished Brass Solutions

Switches and sockets to complement traditional decors, with a touch of class.



Security Solutions

When security is required for areas that can be subjected to vandalism, Clipsal Metal Plate Security Range is the best choice.



Contents

Styles, Finishes & Colour Options Styles, Plate Finishes, Grid Colours	6		•	
How to Order Switches, Architrave Switches, Grids with Cover Plates, Multi-Gang	18			000
Switch Panels, Socket Outlets				
Custom Made Products Oversized Plates, Segregation of Services, Surface Mount, Prestige,	30			2
Lockable Doors, Key Switches, Fasteners (Screws), Additional Plate Fixings, Optional Screw Lengths, Metal Plate Security Range		0		
Product Details Flush Switches, Architrave Flush Switches, Grid Plates with Fascias, Multi-Gang Switch Assemblies – Labelling Options, Message Mechanisms, Multi-Gang Wall Boxes, Switched Socket Outlets, Mounting Accessories & Spacers, Switch	42		ACTIVE	
Mechanisms, Safety & Cleaning Guidelines Wiring & Connection Diagrams To assist with electrical connections, wiring diagrams of popular switches, dimmers and fan controllers.	94		WITCHED ACTIVE	
Medilec Range Bedhead Panels, Medi-Plus Series, ESP Series	106	2002 340	10 mg	
Alternative Products with Metal Finishes Classic C2000, Saturn, Modena, DLT, Touch Screens, Cable Management Systems, Lighting, Ceiling Sweep Fans	110		H	00
Quick Reference Guide	118			

Mounting Accessories Cross Reference Guide, Alpha Numeric Key for

Mounting Accessories, Quick Reference Guide.

Styles, Finishes & Colour Options



Styles

Clipsal's Metal Plate range offers virtually unlimited possibilities. The stainless steel switches and power outlets look superb in today's modern kitchens, while the polished brass range beautifully complements more traditional decors.

Incorporating stylish design and superior durability, the Metal Plate Range will add a touch of class to both residential and commercial interiors.

As the most comprehensive metal plate range in Australia, Clipsal offers a choice of lacquered polished brass and stainless steel finishes. The Metal Plate Range is available in two distinct styles; 'A' (curved) style and 'B' (flat) style.

'A' Style

- Curved edges, providing a similar appearance to Clipsal Standard range products.
- · Prestigious metal plate for upmarket installations.
- Smooth yet sharp appearance will add a touch of class to any installation.
- Available with up to four switches or as a switched socket outlet in both vertical and horizontal formats.
- These plates have a 13mm profile (refer to Quick Reference Guide at rear of brochure for dimensions).



A25A-WE

Pictured: White

AVAILABLE PLATE COLOURS

Standard Colours



Styles, Finishes & Colour Options

'B' Style

- 'B' style plates are flat, durable and add a professional look to any installation.
- Most commonly installed in modern homes, hospitals, schools, prisons and other commercial areas.
- 'B' style plates are available in architrave and standard size switches, socket outlets and multi-gang assemblies.
- These plates have a 1.6mm profile (refer to Quick Reference Guide at rear of brochure for dimensions).



B15V2A-WE

Pictured: Stainless Steel

AVAILABLE PLATE COLOURS

Standard Colours



Non-Standard Colours



'BSL' Style

- Incorporates a combination of the Slimline, Classic and C-Bus grids. Clipsal has modernised the look of the 'B' style range to create a contemporary design.
- The twin switched sockets have centrally located switches for easier access.
- The plate size has been increased to 130mm x 85mm, so that switches and socket outlets are uniform.
- The 'BSL' range combines the prestige 'B' style design with the modern look of Slimline.
- The 1.2mm plate profile, makes it the lowest profile plate in today's market (refer to Quick Reference Guide at rear of brochure for dimensions).



BSL25A-WE

Pictured: Stainless Steel

AVAILABLE PLATE COLOURS

Standard Colours Polished Brass Stainless Steel



Styles, Finishes & Colour Options



Plate Finishes

Clipsal's Metal Plate range is available in two standard plate finishes of polished brass or stainless steel.

The polished brass finish complements traditional decors and is not out of place in environments that require a touch of class to 'lift' existing finishes. Alternatively, the popular stainless steel finish is ideal for contemporary settings, such as offices, kitchens or bathrooms.

If the standard options are not suitable, Clipsal can provide other finishes. Anodised aluminium is available to special order for 'A', 'B' and 'BSL' styles, and powder coated or mirrored finishes are available in the 'B' and 'BSL' styles.

Stainless Steel

- The stainless steel plate finish is available for 4 all plate styles, including multi-gang assemblies.
- Manufactured in 304 grade stainless steel, with a No.4 finish.
- Perfect for use in stainless steel kitchens, commercial offices and other areas where a sleek, modern finish is desired.



A31VA-WE

Pictured: Stainless Steel

Polished Brass

- Available in 'A' and 'B' styles for all products.
- · Also available in a limited range of multi-gang assemblies.
- This finish is great for period homes or traditional hotels, providing a sophisticated look.
- To order polished brass finish, simply prefix the standard Catalogue Number used in the stainless steel range with the letter 'B' ('B' for brass). For example: BSL25A becomes BBSL25A.



BBSL31VA-WE

Pictured: Polished Brass

AVAILABLE PLATE COLOURS

Standard Colours

Polished Brass
Anodised Aluminium
Stainless Steel
Powder Coated
Mirrored

Note: powder coated or mirrored finishes are available in B or BSL style only.

Styles, Finishes & Colour Options

Other Finishes

- Anodised aluminum, powder coated and mirror finishes are available to special order.
- For anodised aluminium, prefix the metal plate catalogue number with the letter 'A' (e.g. ABSL25A).
- For powder coating, specify a Dulux colour. Note: not all powder coat colours are available.
- The mirrored option is a No.8 finish, which is the most reflective finish
 offered globally by the American Society for Testing and Materials
 (ASTM) standards.



Pictured: Anodised Aluminium



Pictured: Powder Coated Finish, Dulux Whisper White



Pictured: Mirror Finish

AVAILABLE PLATE COLOURS

Standard Colours Polished Brass

Stainless Steel

Non-Standard Colours

Anodised Aluminium

Powder Coated


Mirrored

Note: powder coated or mirrored finishes are available in B or BSL style only.


Grain Direction

 All stainless steel plates have 'grain direction' running vertically, on both horizontal and vertical orientated plates (unless otherwise specified).

Note: mechanisms may be removed and turned 90 degrees to change from horizontal to vertical orientation.



Pictured: vertical grain direction



Pictured: horizontal grain direction

AVAILABLE PLATE COLOURS

Standard Colours Polished Brass Anodised Aluminium Stainless Steel Powder Coated Mirrored

Note: powder coated or mirrored finishes are available in B or BSL style only.

Styles, Finishes & Colour Options



Grid Colours

When ordering switch or socket outlets, grid colour variations also have to be taken into consideration because the grid assemblies are visible through the front cover plate. Metal Plate socket outlets have grid assemblies that are available in White Electric (WE) and Black (BK). Other grid colours may be available through special order.

The grid assembly's colour is abbreviated by the last two letters of the catalogue number. The general catalogue number and colour is also separated by a dash. For example, the Catalogue Number for an 'A' style Twin Switched Socket Outlet with Stainless Steel cover and Black grid assembly is A25A-BK. The Catalogue Number for a 'BSL' style One-Gang Switch with Stainless Steel cover and White grid is BSL31VA-WE.

Note: all grid assemblies are made of a plastic that is chemically resistant, making the Metal Plate range ideal for installations where chemicals such as cleaning agents are present.

White Grid



A31VA-WE

Pictured: Stainless Steel



A25A-WE

Pictured: Stainless Steel



BSL31VA-WE

Pictured: Stainless Steel



BSL25A-WE

Pictured: Stainless Steel



BBSL31VA-WE

Pictured: Polished Brass

AVAILABLE GRID COLOURS

Grid Colours

White Electric

Black

The final letters after the dash indicate the grid plate and/or switch colour code:

WE – White Electric BK – Black

A 2 5 A - WE

Styles, Finishes & Colour Options

Black Grid



A31VA-BK

Pictured: Stainless Steel



A25A-BK

Pictured: Stainless Steel



BSL31VA-BK

Pictured: Stainless Steel



BSL25A-BK

Pictured: Stainless Steel



BA31VA-BK

Pictured: Polished Brass

AVAILABLE GRID COLOURS

Grid Colours

White Electric

The final letters after the dash indicate the grid plate and/or switch colour code:

WE – White Electric BK – Black

A 2 5 A - B K

How to Order



Switches

The Clipsal Metal Plate range utilises 30 Series Switch Mechanisms, which have a patented design and trademark of Clipsal. Metal Plate switches in 'A' style and 'B' style are supplied with standard size fascia plates (115mm x 70mm) in one-gang through to four-gang formats. However, the 'BSL' style is an oversized version of 'B' style plates, supplied with 130mm x 85mm fascia plates in onegang through to six-gang.

Explanation of Prefixes

Each range of switch and socket outlets have different prefixes at the beginning of the Catalogue Number. For Metal Plate products, the prefix is either 'A', 'BA', 'B', 'BB' 'BSL' or 'BBSL'. This depends on whether the product is 'A', 'B' or 'BSL' style in polished brass or stainless steel.

Prefixes at a Glance

Prefix	Dimensions (L x W x D)	Colour	Shape
Α	115mm x 70mm x 10mm to 13mm	Stainless Steel	A Style
ВА	115mm x 70mm x 10mm to 13mm	Polished Brass	A Style
В	115mm x 70mm x 1.6mm	Stainless Steel	B Style
ВВ	115mm x 70mm x 1.6mm	Polished Brass	B Style
BSL	130mm x 85mm x 1.2mm	Stainless Steel	BSL Style
BBSL	130mm x 85mm x 1.2mm	Polished Brass	BSL Style


Note: depth indicates face plate only.

How to Order

'A' Style

Dimensions: L155mm x W70mm x D10mm to 13mm (external profile).

One-Gang




A31VA

Stainless Steel

BA31VA

Polished Brass

Two-Gang



Four-Gang


A32VA

Stainless Steel

BA32VA

Polished Brass

Three-Gang




A33VA

Stainless Steel

BA33VA

Polished Brass



A34VA

Stainless Steel

BA34VA

Polished Brass

CATALOGUE NUMBER GUIDE

When prefixed with the letter 'A' this indicates that the product is 'A' style and cover is stainless steel.

BA 3 4 VA -WE

The letters 'BA' indicate that the product is 'A' style and that the cover is brass.

The number '3' indicates that the product is switch related.

This number indicates the amount of switch mechanisms included in the product.

The letters 'VA' indicate that the product is vertically assembled.

Colour reference of grid colours (e.g. WE is White Electric).


Note: colour reference is separated by a dash from the catalogue number prefix.


'B' Style

Dimensions: L115mm x W70mm x D1.6mm (face plate).


'BSL' Style

Dimensions: L130mm x W85mm x D1.2mm (face plate).






BSL31VA Stainless Steel BBSL31VA Polished Brass



Stainless Steel


BBSL32VA

Polished Brass




BSL33VA Stainless Steel BBSL33VA Polished Brass






BSL34VA Stainless Steel BBSL34VA Polished Brass



BSL35VA Stainless Steel BBSL35VA Stainless Steel



BSL36VA Stainless Steel BBSL36VA Stainless Steel

CATALOGUE NUMBER GUIDE

When prefixed with the letter 'BSL' this indicates that the product is 'BSL' style and cover is stainless steel. _BSL 3 4 VA -WE

The letters 'BBSL' indicate that the product is 'BSL' style and that the cover is brass.

The number '3' indicates that the product is switch related. _____

This number indicates the amount of switch mechanisms included in the product.

The letters 'VA' indicate that the product is vertically assembled.

Colour reference of grid colours (e.g. WE is White Electric). _____

Note: colour reference is separated by a 'dash' from the catalogue number prefix.

How to Order



Architrave Switches

Metal Plate architrave switches are available in one, two and three-gang formats ('B' style only). All three architrave switch models come in different sizes.

Metal Plate architrave dimensions

Catalogue No.	Length	Width	Depth
B31A	89mm	35mm	1.6mm
B32A	109mm	35mm	1.6mm
B33A	139mm	35mm	1.6mm

Note: total depth is 30mm into the wall and face plate is 1.6mm.

Architrave Switches - Available in 'B' Style Only



CATALOGUE NUMBER GUIDE



Note: colour reference is separated by a 'dash' from the catalogue number prefix.

How to Order




Grids with Cover Plates (Less Mechanisms)

Metal Plate Switches in 'BSL' or 'BBSL' style can be supplied without mechanisms, which is ideal for projects that require specific 30 Series Mechanisms (e.g. fluorescent loads, message mechanisms or data jacks).

When ordering these products it is important to indicate what colour plate bezels will be required so that they match the colour of the mechanisms when they are inserted. For example: a vertical stainless steel switch plate with a white bezel (to match separately purchased white switch mechanisms), is ordered by requesting BSL31VH-**WE**.

Grids with Cover Plates (Less Mechanisms) - 'BSL' Style

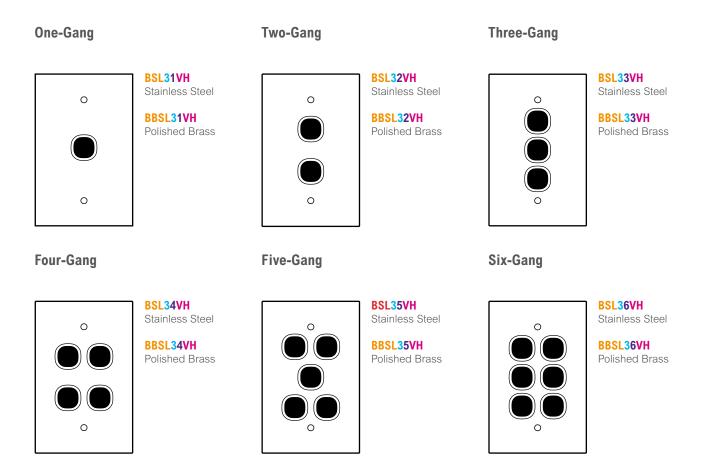

CATALOGUE NUMBER GUIDE

When prefixed with 'BSL' this indicates the product is 'BSL' style and cover is stainless steel.

BSL 3 4 VH -WE

The letters 'BBSL' indicate that the product is 'BSL' style and that the cover is brass.

The number '3' indicates that the product is switch related.

This number indicates the amount of switch mechanisms included in the product.

The letters 'VH' indicates that the product can be vertically or horizontally orientated.

Indicates colour of exposed mechanism bezel (e.g. WE is White Electric).

Note: colour reference is separated by a 'dash' from the catalogue number prefix.

How to Order




Multi-Gang Switch Panels

The Metal Plate range also provides multi-gang switch panels in configurations that can accommodate up to 72 mechanisms as standard units. They are all provided with 'B' style 1.6mm fascia panels without mechanisms. All flush plate finishing is vertical unless otherwise specified.


Please note: the Catalogue Numbers listed include the stainless steel cover plate, grid assembly, wall box, mounting clips and all screws. As standard, mechanisms are not included and labelling must be requested if required. There are various other multi-gang switch panels that can be custom built for specific projects. In these situations it is best to contact your Clipsal Representative or your local Clipsal Office.

Please refer to pages 60 to 65 for information on wall boxes.


Four-Gang




Six-Gang




Eight-Gang



Ten-Gang




Twelve-Gang Labelled



B12/30L6

Sixteen-Gang



16/30/162/4

CATALOGUE NUMBER GUIDE

When prefixed with the letter 'B' this indicates the product is 'B' style and cover is stainless steel.

If product is not prefixed with 'B', the product will still be 'B' style stainless steel as standard.

The number following the 'B' or prefixing the Catalogue Number indicates the amount of switch apertures.

The number '30' indicates that the product is switch related.

The letter 'L' indicates that the product is labelled (if no 'L' is shown, product is unlabelled).

The last number indicates the amount of vertical switch columns.

Indicates colour of exposed bezel (e.g. WE is White Electric).

A 162, 163 or 164 series number indicates the product is supplied with this style of wall box. If catalogue number does not include either of these numbers, the product is supplied with the 164 series wall box as standard.

Note: colour reference is separated by a dash from the catalogue number prefix.

How to Order

Socket Outlets

Switched socket outlets are often referred to as GPOs (general purpose outlets), power points or power outlets. To avoid confusion, the description 'switched socket outlets' will be used throughout this brochure.


Single and twin switched socket outlets are available in horizontal and vertical formats. Catalogue Numbers will vary depending on the number of sockets and whether the product is horizontally or vertically mounted.

'A' Styles


Single/Vertical




Single/Horizontal



Twin/Horizontal




CATALOGUE NUMBER GUIDE

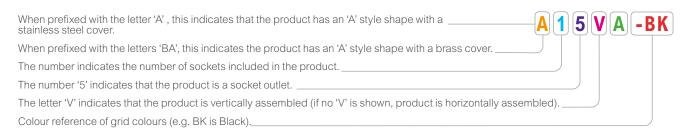

Note: colour reference is separated by a dash from the catalogue number prefix.

'B' and 'BSL' Styles


Single/Vertical



B15VA Stainless Steel

BB15VAPolished Brass


Twin/Square



B15V2A Stainless Steel

BB15V2APolished Brass


Single/Horizontal



BSL15A Stainless Steel

BBSL15A Polished Brass

Twin/Horizontal



BSL25A Stainless Steel

BBSL25A
Polished Brass

CATALOGUE NUMBER GUIDE

When prefixed with 'B' or 'BSL' this indicates the product is 'B' or 'BSL' style and cover is stainless steel.

When prefixed with 'BB' or 'BSL' this indicates the product is 'B' or 'BSL' style and cover is brass.

The number indicates the number of sockets included in the product.

The number '5' indicates that the product is a socket outlet.

This sequence indicates that the product is a twin socket outlet with a two piece base.

Colour reference of grid colours (e.g. BR is Brown).

Custom Made Products



Custom Made Products

Metal Plate socket outlets can be ordered with additional features, including an extra switch mechanism, safety shutters, neons, 15A sockets, round Earth for lighting and more. Please refer to pages 66 to 67 under Switched Socket Outlets for more details.

There is also a range of custom made products and features that Clipsal can provide to meet your specific project requirements. Some of the options available are shown in the following section.

Oversized Plates

The 'BSL' range of products are available as standard in an oversized plate format (130mm \times 85mm). Some of the remaining 'B' style plates (e.g. B15/15A) are a standard measurement of 115mm \times 70mm.

If uniformity is required across the project most 'B' style plates can be ordered in oversized (130mm x 85mm) format.

Oversized Plate Size



BSL25A-WE

Pictured: Stainless Steel

Standard Plate Size



B15/15A-WE

Pictured: Stainless Steel

Custom Made Products

Segregation of Services


To comply with relevant wiring standards in some situations, it is important to ensure that power, light or data cables are segregated by an appropriate distance or approved barriers. In addition to standard segregated and fire rated wall boxes, Clipsal can custom design Metal Plate Wall Boxes with segregation barriers.



Wall box with segregation barrier

Surface Mount


Surface mount multi-gang switch plates are ideal when walls are not deep enough to accept wall boxes; have services, such as gas/water located within the walls; or even to allow easier access when performing service work, maintenance or upgrades.



With surface mount box

Prestige

If larger mechanisms are required with a Metal Plate fascia, Clipsal can custom manufacture the Prestige (large switch) metal plate covers. These are ideal for aged care facilities or health care markets.



Pictured: four-gang metal plate cover to adapt to Prestige Mechanisms or socket outlets, and 30N neon

Lockable Doors

To prevent non-approved persons from accessing multi-gang switch panels, Clipsal provides lockable front doors (switch covers). The doors can be designed to be compatible with your facility's lock, or subject to availability, Clipsal can install a locking device to suit your project.



Pictured: multi-gang with lockable door.

Key Switches

Key switches provide increased security and control overloads compared to standard 30 Series Switch Mechanisms. Key switches are also available with barrels that accept 'common keys' to allow for alike keys across your project.



Metal Plate B Style, 1-Way, locks in off position

Custom Made Products

Fasteners (Screws)

In addition to providing additional fixing/mounting points, Clipsal offers facia screws with options outside of standard slotted screw heads. This includes tamperproof designs that make it impossible for persons to remove the front cover without the correct tool.

Clipsal can supply multi-gangs or other metal plate products with button head "pin-in-hex" socket security screws. They cannot be purchased as separate items. Available in lengths of 9.5mm or 19mm.



Pictured: "pin-in-hex" socket security screw

Additional Plate Fixings

To increase security on Metal Plate installations, Clipsal can provide additional fixing/mounting points on the front of the fascia cover plate. Mounting holes placed in the four corners of the metal plate will assist in preventing access to live electrics behind the plate. Refer to Metal Plate Security range on pages 34 - 39 for more information.



With standard fixing points



With additional fixing points

Optional Screw Lengths

If wall boxes are set back further than the standard wall depth or walls have tiles on them, the installer may require longer cover plate screws. Longer screws in 50mm or 75mm lengths are available for these installations. Additionally, 10mm shorter fascia screws are also available.



B31V-FS

10mm fascia screw, with BS M3.5 x 0.8 raised countersunk slotted head



B25-FS

50mm fascia screw with BS M3.5 x 0.8 raised countersunk slotted head (provided in packs of 10 and boxes of 100)



BSL25-FS

75mm Fascia Screw with BS M3.5 x 0.8 raised countersunk slotted head (provided in packs of 10 and boxes of 100)

Custom Made Products



Metal Plate Security Range

For many years Clipsal have provided custom-made metal plate products for environments that require additional security. They are ideal for gaols, detention centres, police stations, mental health, etc.

Clipsal's standard features for this range includes products with rounded corners, corner fixing points and additional grid mounting studs.

This Metal Plate Security range is now a standard offer for Clipsal. The range comprises:

- · one to six gang switch plates
- single switched socket outlets with or without extra switches
- twin switched socket outlets with or without extra switches
- twin switched socket outlets with RCD protection
- blank flush plates
- blank flush plates with round holes.

All plates within the Metal Plate Security range are custom made to special order.

Installation Guidelines for Security Range Products


Unlike standard switches and sockets, the Metal Plate Security range are not mounted to wall surfaces at traditional 84mm mounting centres. There are no standard fixing screws supplied with each product.

However, to assist with the mounting process there are 7mm diameter mounting holes placed in all four corners of each fascia plate. Holes are not countersunk and mounting screws will sit 'proud' of the cover plate.

Cavity Walls

There are no standard mounting brackets or clips available for the Metal Plate Security range, so it is recommended to use appropriate fasteners (e.g. toggle bolts). Alternatively, if other traditional fasteners are utilised, ensure wall studs or noggins are installed behind the four corner fixing points (see Figure 1). If wall boxes are used in cavity walls, they must be set back to clear grid plate assemblies (approximately 20mm) and wall boxes must be secured to appropriate wall structures.

Figure 1



Masonry Walls

For masonry walls, it is recommended to use M5 Dynabolts with tamperproof screws or appropriate fasteners with wall plugs (see Figure 2).

If wall boxes are required for conduit termination, the 157 metal wall box is best suited, providing enough clearance for grid studs (see Figure 3).

Figure 2
Masonry wall installation




Figure 3BSLS25A grid mounting stud positions and attached Earth strap



Custom Made Security Products



Custom Made Metal Plate Security Range. Grid Plates with Fascias (Including Blank Plates)

Grid plates and fascias can be purchased together without the 30M Switch Mechanisms for convenience and greater choice. This option is particularly popular for projects that require specific mechanisms to be installed including: dimmers, fan controls, cooker mechanisms, data, telephone, television, neons, bell press, etc. They can be mounted either vertically or horizontally.

If no mechanisms are required at all, the BSLS31VX can be utilised. These are blank plates, which can be used for covering existing wall apertures or for mounting other control equipment (e.g. nurse call, emergency stop, key switches, etc).

To complement the Metal Plate Security Range of grid plates with fascias, a range of switched sockets is available in single or twin configuration, with or without extra switches, and with RCD options. They also have rounded corners and four corner fixing positions in 1.2mm flat stainless steel fascias.

Metal Plate Security Range – Stainless Steel Blank Plate – Oversize for Security Applications

Catalogue No.	Length	Width	Depth	Mounting Centres	Corner Mounting Hole
All products	130mm	85mm	30mm	120 x 75mm	7mm ø

	Description
BSLS31VX	Blank Flush Grid Plate and 1.2mm flat stainless steel fascia. Has rounded corners and 4 corner fixing positions. Can be mounted vertically or horizontally.
BSLS31VXR1	As per BSLS31VX, with nominated single round aperture. Ideal for indicator lights, key switches, piezo switches, etc.
BSLS31VXR2	As per BSLS31VX, with two nominated round apertures. Ideal for indicator lights, key switches, piezo switches, etc.





BSLS31VX

BSLS31VXR1

All plates within the Metal Plate Security range are custom made to special order.



BSLS31VXR2

Custom Made Security Products

Metal Plate Security Range – Grid Plates and Stainless Steel Fascias Blank Plate – Oversize

Catalogue No.	Length	Width	Depth	Mounting Centres	Corner Mounting Hole
All products	130mm	85mm	30mm	120 x 75mm	7mm ø

	Description
BSLS31VH	1-Gang Switch Plate with facility for 1 mechanism.
BSLS32VH	2-Gang Switch Plate with facility for 2 mechanism.
BSLS33VH	3-Gang Switch Plate with facility for 3 mechanism.
BSLS34VH	4-Gang Switch Plate with facility for 4 mechanism.
BSLS35VH	5-Gang Switch Plate with facility for 5 mechanism.
BSLS36VH	6-Gang Switch Plate with facility for 6 mechanism.

All plates within the Metal Plate Security range are custom made to special order.





BSLS31VH

BSLS32VH





BSLS33VH

BSLS34VH





BSLS35VH

BSLS36VH

Metal Plate Security Range – Stainless Steel Single Switched Socket Outlets – Oversize

Catalogue No.	Length	Width	Depth	Mounting Centres	Corner Mounting Hole
All products	130mm	85mm	35mm	120 x 75mm	7mm ø

	Description
BSLS15A	Single Switched Socket Outlet. 250V, 10A.
BSLS15XA	Single Switched Socket Outlet with removable extra switch. 250V, 10A.



BSLS15A

BSLS15XA

 $\label{eq:All plates} \mbox{ All plates within the Metal Plate Security range are custom made to special order.}$

Security Range – Stainless Steel Twin Switched Socket Outlets – Oversize for Security Applications

Catalogue No.	Length	Width	Depth	Mounting Centres	Corner Mounting Hole
All products	130mm	85mm	30mm	120 x 75mm	7mm ø

	Description
BSLS25A	Twin Switched Socket Outlet. 250V, 10A. Has rounded corners and 4 corner fixing positions in 1.2mm flat stainless steel fascia.
BSLS25XA	Twin Switched Socket Outlet with removable extra switch. Has rounded corners and 4 corner fixing positions in 1.2mm flat stainless steel fascia.
BSLS25RC	Twin Switched Socket Outlet with RCD. Has rounded corners and 4 corner fixing positions in 1.2mm flat stainless steel fascia.



BSLS25A



BSLS25XA




BSLS25RC

All plates within the Metal Plate Security range are custom made to special order.

Note: twin switched sockets with extra switches or RCDs are available. However, consider mounting requirements, due to large grid on rear of plate.

Product Details

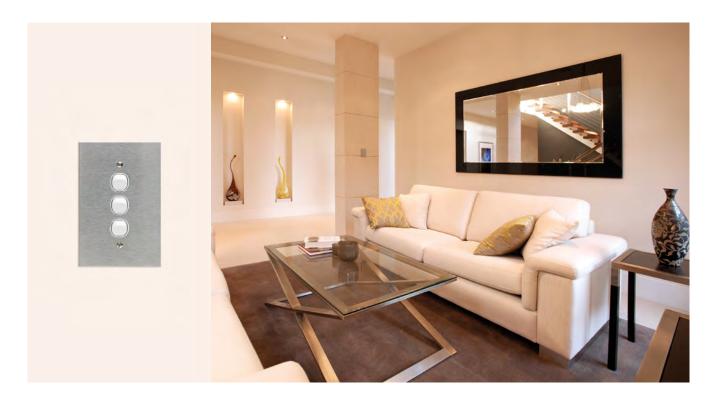

Flush Switches

These distinctive plates can accommodate up to four 30 Series Mechanisms in 'A' style format or six 30 Series Mechanisms in 'BSL' style format. All units are double insulated and suitable for vertical or horizontal mounting. The stainless steel switches look superb in today's kitchens, while the brass models beautifully complement more traditional decors.

Standard size flush switches are available in both 'A' and 'B' styles and oversized flush switches are available in 'BSL' series. All have 84mm mounting centres to suit all standard pattern mounting accessories. All switches supplied within the Metal Plate range are Clipsal's 30M Switch Mechanisms. All exposed mouldings are made of chemical resistant materials.

'A' Style Stainless Steel Switches – Standard Size

Length

Catalogue No.

All products	115mm	70mm	30mm	84mm apart			
	Description						
A31VA	1-Gang Switch. 250V/10A, 1-way/2-way – standard size grid plate and 10mm deep curved stainless steel fascia, complete with one 30M switch in vertical format.						
A32VA	2-Gang Switch. 250V/10A, 1-way/2-way – standard size grid plate and 10mm deep curved stainless steel fascia, complete with one 30M switch in vertical format.						
A33VA	3-Gang Switch. 250V/10A, 1-way/2-way – standard size grid plate and 10mm deep curved stainless steel fascia, complete with one 30M switch in vertical format.						
A34VA	4-Gang Switch. 250V/10A, 1-way/2-way – standard size grid plate and 10mm deep curved stainless steel fascia, complete with one 30M switch in vertical format.						

Depth

Mounting Centres





A31VA

A32VA





A33VA

A34VA

'A' Style Polished Brass Switches - Standard Size

Catalogue No. Length

· · · · · · · · · · · · · · · · · · ·				•			
All products	115mm	70mm	30mm	84mm apart			
	Description						
BA31VA	1-Gang Switch. 250V/10A, 1-way/2-way – standard size gridplate and 10mm deep curved polished brass fascia, complete with two 30M switches in vertical format.						
BA32VA	2-Gang Switch. 250V/10A, 1-way/2-way – standard size gridplate and 10mm deep curved polished brass fascia, complete with two 30M switches in vertical format.						
BA33VA	3-Gang Switch. 250V/10A, 1-way/2-way – standard size gridplate and 10mm deep curved polished brass fascia, complete with two 30M switches in vertical format.						
BA34VA	4-Gang Switch. 250V/10A, 1-way/2-way – standard size grid plate and 10mm deep curved polished brass fascia, complete with two 30M switches in vertical format.						

Depth

Mounting Centres







BA32VA







BA34VA

Product Details

Catalogue No.

'BSL' Style Stainless Steel Switches - Oversize

Width

Length

vertical format.

vertical format.

All products	130mm	85mm	30mm	84mm apart			
	Description						
BSL31VA	1.2mm flat s	1-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat stainless steel fascia, complete with one 30M switch in vertical format.					
BSL32VA	flat stainless	2-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat stainless steel fascia, complete with two 30M switch mechanisms in vertical format.					
BSL33VA	flat stainless	3-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat stainless steel fascia, complete with three 30M switch mechanisms in vertical format.					
BSL34VA	flat stainless	4-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat stainless steel fascia, complete with four 30M switch mechanisms in vertical format.					
BSL35VA				y – oversize grid plate and 1.2mm n five 30M switch mechanisms in			

6-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm

flat stainless steel fascia, complete with six 30M switch mechanisms in

Depth

Mounting Centres



BSL36VA





BSL31VA

BSL32VA





BSL33VA

BSL34VA





BSL35VA

BSL36VA

"BBSL" Style Polished Brass Switches - Oversize

Catalogue No.	Length	Width	Depth	Mounting Centres
All products	130mm	85mm	30mm	84mm apart

	Description
BBSL31VA	1-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with one 30M switch in vertical format.
BBSL32VA	2-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with two 30M switch mechanisms in vertical format.
BBSL33VA	3-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with three 30M switch mechanisms in vertical format.
BBSL34VA	4-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with four 30M switch mechanisms in vertical format.
BBSL35VA	5-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with five 30M switch mechanisms in vertical format.
BBSL36VA	6-Gang Switch. 250V/10A, 1-way/2-way – oversize grid plate and 1.2mm flat polished brass fascia, complete with six 30M switch mechanisms in vertical format.

Cut outs: 73mm L x 50mm W.







BBSL32VA





BBSL33VA

BBSL34VA





BBSL35VA

BBSL36VA

Product Details




Architrave Flush Switches

Architrave flush switches are available in 'B' style only. An Earthing point is provided on all plates. These Metal Plate Architrave Switches are great for areas where there is limited access or wall space. Not only do they save space, they also blend in and are easy to locate.

Architrave Switch Plates – Mounting Templates

Mounting templates are provided below for all Clipsal Metal Plate Architrave Switch Plates. They can be used as a guide for drilling out of switch mechanism recesses, as well as mounting holes.

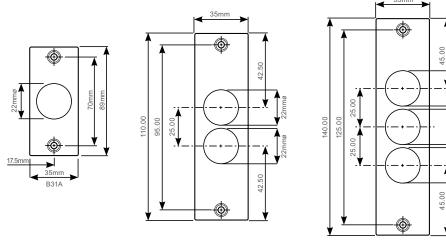

Note: images on this page are not drawn to scale.

'B' Style Stainless Steel and Polished Brass Switches – Architrave Size

Catalogue No.	Length	Width	Depth	Mounting Centres
B31A, BB31A	90mm	35mm	30mm	70mm
B32A, BB32A	110mm	35mm	30mm	95mm
B31A, BB31A	140mm	35mm	30mm	125mm

	Description
B31A	1-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat stainless steel fascia, complete with one 30M switch mechanism in vertical format.
BB31A	1-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat polished brass fascia, complete with one 30M switch mechanism in vertical format
B32A	2-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat stainless steel fascia, complete with two 30M switch mechanisms in vertical format.
BB32A	2-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat polished brass fascia, complete with two 30M switch mechanisms in vertical format
B33A	3-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat stainless steel fascia, complete with three 30M switch mechanisms in vertical format.
BB33A	3-Gang Switch. 250V/10A, 1-way/2-way architrave grid plate and 1.6mm flat polished brass fascia, complete with three 30M switch

mechanisms in vertical format.





B31A







B32A

BB32A





B33A

BB33A

Product Details



Grid Plates with Fascias (Including Blank Plates)

Grid plates and fascias can be purchased together without the 30M Switch Mechanisms for convenience and greater choice. This option is particularly popular for projects that require specific mechanisms to be installed including: dimmers, fan controls, cooker mechanisms, data, telephone, television, neons, bell press, etc. They can be mounted either vertically or horizontally.

If no mechanisms are required at all the A31VX or B31VX can be utilised. These are blank plates, which can be used for covering existing wall apertures or for mounting of other control equipment (e.g. nurse call, emergency stop, thermostats).

'A' Style Blank Plate Stainless Steel and Polished Brass -Standard Size

BA31VX

Catalogue No.	Length	Width	Depth	Mounting Centres			
All products	115mm	70mm	10mm	84mm apart			
	Description						
A31VX	Blank Plate. Standard size, 10mm deep curved stainless steel fascia,						

suitable for mounting to any single-gang mounting accessory. Blank Plate. Standard size, 10mm deep curved polished brass fascia,

suitable for mounting to any single-gang mounting accessory.





A31VX

BA31VX

'B' Style Blank Plate Stainless Steel and Polished Brass -Standard Size

Catalogue No.	Length	Width	Depth	Mounting Centres
All products	115mm	70mm	1.6mm	84mm apart

	Description
B31VX	Blank Plate. Standard size, 1.6mm flat stainless steel fascia suitable for mounting to any single-gang mounting accessory. Oversized plates (B31VX-OS) measuring 130 x 85mm are available to special order.
BB31VX	Blank Plate. Standard size, 1.6mm flat polished brass fascia suitable for mounting to any single-gang mounting accessory. Oversized plates (BB31VX-OS) measuring 130 x 85mm are available to special order.





Product Details

'BSL' Style Grid Plates and Stainless Steel Fascias (Less Mechanisms) – Oversize

Catalogue No.	Length	Width	Depth	Mounting Centres
All products	130mm	85mm	8.7mm	84mm apart

	Description
BSL31VH	1-Gang Grid. Oversize,1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.
BSL32VH	2-Gang Grid. Oversize 1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.
BSL33VH	3-Gang Grid. Oversize 1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.
BSL34VH	4-Gang Grid. Oversize 1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.
BSL35VH	5-Gang Grid. Oversize 1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.
BSL36VH	6-Gang Grid. Oversize 1.2mm flat stainless steel fascia. Can be mounted vertically or horizontally.



Note: if white switch mechanisms are to be inserted add:

'-WE' after catalogue number for white, e.g. BSL31VH-WE







BSL32VH



BSL33VH



BSL34VH



BSL35VH



BSL36VH

^{&#}x27;-BK' after catalogue number for black, e.g. BSL31VH-BK

'BBSL' Style Gridplates and Polished Brass Fascias (Less Mechanisms) - Oversize

Catalogue No.	Length	Width	Depth	Mounting Centres
All products	130mm	85mm	8.7mm	84mm apart

	Description
BBSL31VH	1-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.
BBSL32VH	2-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.
BBSL33VH	3-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.
BBSL34VH	4-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.
BBSL35VH	5-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.
BBSL36VH	6-Gang Grid. Oversize 1.2mm flat polished brass fascia. Can be mounted vertically or horizontally.

Cut outs: 73mm L x 50mm W

Note: if white switch mechanisms are to be inserted add: '-WE' after catalogue number for white, e.g. BBSL31VH-WE '-BK' after catalogue number for black, e.g. BBSL31VH-BK





BBSL31VH

BBSL32VH





BBSL33VH

BBSL34VH





BBSL35VH

BBSL36VH

Product Details



Multi-Gang Switch Assemblies

Clipsal 'B' Style multi-gang Switch Panels have been providing solutions to commercial environments for decades. Their flexibility in design allows them to accommodate up to 72×30 Series Mechanisms, dimmers, neons, key switches, data jacks, etc.


The low profile, versatility and premium aesthetics of the multi-gangs allow them to be installed in many areas, including modern restaurants, cafes, commercial offices, schools, hospitals, etc.

They can be provided in plain, or if required, with labels for ease of identification. All products listed are supplied as standard with Clipsal's quality wall boxes so that installation is a breeze.

Multi-Gang Switch Assemblies (Less Mechanisms) - Stainless Steel

Fascia Wall Box

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
B4/30/2	4-Gang Switch Plate. 2 rows of 2. Stainless steel.	119mm	120mm	164/2	94 x 97 x 58mm
B6/30/3	6-Gang Switch Plate. 2 rows of 3. Stainless steel.	165mm	120mm	164/3	140 x 97 x 58mm
B8/30/4	8-Gang Switch Plate. 2 rows of 4. Stainless steel.	211mm	120mm	164/4	186 x 97 x 58mm
B10/30/5	10-Gang Switch Plate. 2 rows of 5. Stainless steel.	257mm	120mm	164/5	232 x 97 x 58mm
B12/30/6	12-Gang Switch Plate. 2 rows of 6. Stainless steel.	303mm	120mm	164/6	278 x 97 x 58mm
12/30/162/3	12-Gang Switch Plate. 4 rows of 3. Stainless steel.	165mm	215mm	162/3	140 x 194 x 58mm
14/30/7	14-Gang Switch Plate. 2 rows of 7. Stainless steel.	349mm	120mm	164/7	324 x 97 x 58mm
16/30/8	16-Gang Switch Plate. 2 rows of 8. Stainless steel.	395mm	120mm	164/8	370 x 97 x 58mm
16/30/162/4	16-Gang Switch Plate. 4 rows of 4. Stainless steel.	211mm	215mm	162/4	186 x 194 x 58mm
18/30/9	18-Gang Switch Plate. 2 rows of 9. Stainless steel.	441mm	120mm	164/9	416 x 97 x 58mm
20/30/10	20-Gang Switch Plate. 2 rows of 10. Stainless steel.	487mm	120mm	164/10	462 x 97 x 58mm

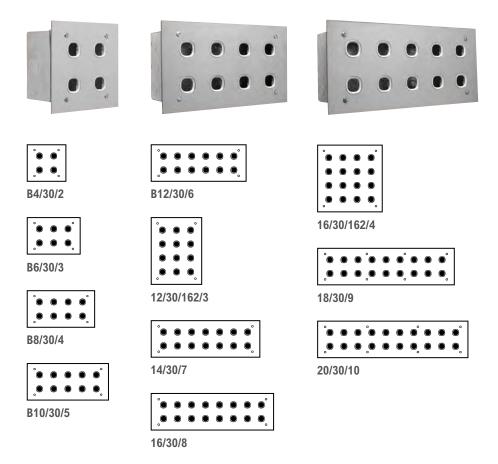


Product Details

Multi-Gang Switch Assemblies (Less Mechanisms) – Stainless Steel


Fascia	Wall Box
--------	----------

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
20/30/162/5	20-Gang Switch Plate. 4 rows of 5. Stainless steel.	257mm	215mm	162/5	232 x 194 x 58mm
22/30/11	22-Gang Switch Plate. 2 rows of 11. Stainless steel.	533mm	120mm	164/11	508 x 97 x 58mm
24/30/12	24-Gang Switch Plate. 2 rows of 12. Stainless steel.	579mm	120mm	164/12	554 x 97 x 58mm
24/30/162/6	24-Gang Switch Plate. 4 rows of 6. Stainless steel.	303mm	215mm	162/6	278 x 194 x 58mm
24/30/163/4	24-Gang Switch Plate. 6 rows of 4. Stainless steel.	211mm	310mm	163/4	186 x 290 x 58mm
26/30/13	26-Gang Switch Plate. 2 rows of 13. Stainless steel.	625mm	120mm	164/13	600 x 97 x 58mm
28/30/14	28-Gang Switch Plate. 2 rows of 14. Stainless steel.	671mm	120mm	164/14	646 x 97 x 58mm
28/30/162/7	28-Gang Switch Plate. 4 rows of 7. Stainless steel.	349mm	215mm	162/7	324 x 194 x 58mm
30/30/15	30-Gang Switch Plate. 2 rows of 15. Stainless steel.	717mm	120mm	164/15	692 x 97 x 58mm
30/30/163/5	30-Gang Switch Plate. 6 rows of 5. Stainless steel.	257mm	310mm	163/5	232 x 290 x 58mm
32/30/162/8	32-Gang Switch Plate. 4 rows of 8. Stainless steel.	395mm	215mm	162/8	370 x 194 x 58mm

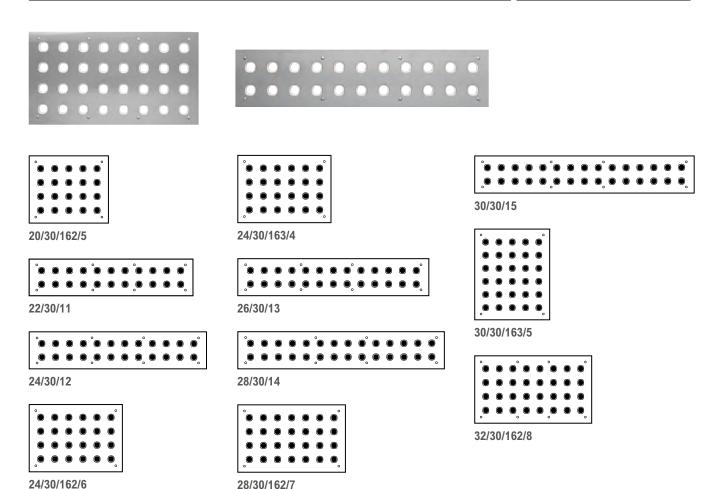

Multi-Gang Switch Assemblies (Less Mechanisms) – Stainless Steel

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
36/30/162/9	36-Gang Switch Plate. 4 rows of 9. Stainless steel.	441mm	215mm	162/9	416 x 194 x 58mm
36/30/163/6	36-Gang Switch Plate. 6 rows of 6. Stainless steel.	303mm	310mm	163/6	278 x 290 x 58mm
40/30/162/10	40-Gang Switch Plate. 4 rows of 10. Stainless steel.	487mm	215mm	162/10	462 x 194 x 58mm
42/30/163/7	42-Gang Switch Plate. 6 rows of 7. Stainless steel.	349mm	310mm	163/7	324 x 290 x 58mm
44/30/162/11	44-Gang Switch Plate. 4 rows of 11. Stainless steel.	533mm	215mm	162/11	508 x 194 x 58mm
48/30/162/12	48-Gang Switch Plate. 4 rows of 12. Stainless steel.	579mm	215mm	162/12	554 x 194 x 58mm
48/30/163/8	48-Gang Switch Plate. 6 rows of 8. Stainless steel.	395mm	310mm	163/8	370 x 290 x 58mm
54/30/163/9	54-Gang Switch Plate. 6 rows of 9. Stainless steel.	441mm	310mm	163/9	416 x 290 x 58mm
60/30/163/10	60-Gang Switch Plate. 6 rows of 10. Stainless steel.	487mm	310mm	163/10	462 x 290 x 58mm
66/30/163/11	66-Gang Switch Plate. 6 rows of 11. Stainless steel.	533mm	310mm	163/11	508 x 290 x 58mm
72/30/163/12	72-Gang Switch Plate. 6 rows of 12. Stainless steel.	579mm	310mm	163/12	554 x 290 x 58mm

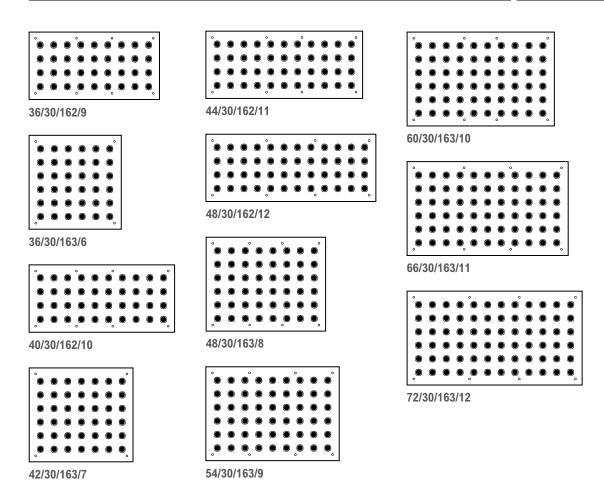

Product Details

Multi-Gang Switch Assemblies – Labelling Options

All Clipsal multi-gang products can be labelled using three alternative labelling options as follows:

Option 1: labelled multi-gangs
Option 2: direct engraving of plates

Option 3: messages directly to switch dollies.

Labelled Multi-Gangs

Labelled multi-gang products are provided with plastic strips that can be engraved and are coated with a removable transparent protective film. The strips are a two-ply design (white on black) that are screw fixed across the full length of the multi-gangs grid assembly. For each row of the labelled multi-gang, there is a full plastic strip provided.

If required, engraving on the plastic strips can be provided in 3mm Arial font. The front metal fascia of the labelled Multi-Gang has individual window apertures measuring 31mm wide x 6mm high.



Engraved Multi-Gangs

Plate engraving - alternatively if labelled multi-gangs are not suitable, direct engraving on the front metal fascia is available. Standard black font for this option is 4mm, other colours and font sizes are available upon special request.



Message Mechanisms


In addition to labelling or plate engraving, one of the more popular forms of labelling is to 'laser etch' or 'hot stamp' the face of the 30 series dollies with your preferred message. There are a number of standard messages available that are shown on pages 58 to 59.



Multi-Gang Switch Assemblies - Labelled Versions (Less Mechanisms) - Stainless Steel

Fascia	Wall Box
1 43014	Wall Dox

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
B4/30L2	4-Gang Labelled Switch Plate. 2 rows of 2. Stainless steel.	119mm	120mm	164/2	94 x 97 x 58mm
B6/30L3	6-Gang Labelled Switch Plate. 2 rows of 3. Stainless steel.	165mm	120mm	164/3	140 x 97 x 58mm
B8/30L4	8-Gang Labelled Switch Plate. 2 rows of 4. Stainless steel.	211mm	120mm	164/4	186 x 97 x 58mm
B10/30L5	10-Gang Labelled Switch Plate. 2 rows of 5. Stainless steel.	257mm	120mm	164/5	232 x 97 x 58mm
B12/30L6	12-Gang Labelled Switch Plate. 2 rows of 6. Stainless steel.	303mm	120mm	164/6	278 x 97 x 58mm
12/30L162/3	12-Gang Labelled Switch Plate. 4 rows of 3. Stainless steel.	165mm	215mm	162/3	140 x 194 x 58mm
14/30L7	14-Gang Labelled Switch Plate. 2 rows of 7. Stainless steel.	349mm	120mm	164/7	324 x 97 x 58mm
16/30L8	16-Gang Labelled Switch Plate. 2 rows of 8. Stainless steel.	395mm	120mm	164/8	370 x 97 x 58mm
16/30L162/4	16-Gang Labelled Switch Plate. 4 rows of 4. Stainless steel.	211mm	215mm	162/4	186 x 194 x 58mm
18/30L9	18-Gang Labelled Switch Plate. 2 rows of 9. Stainless steel.	441mm	120mm	164/9	416 x 97 x 58mm
20/30L10	20-Gang Labelled Switch Plate. 2 rows of 10. Stainless steel.	487mm	120mm	164/10	462 x 97 x 58mm

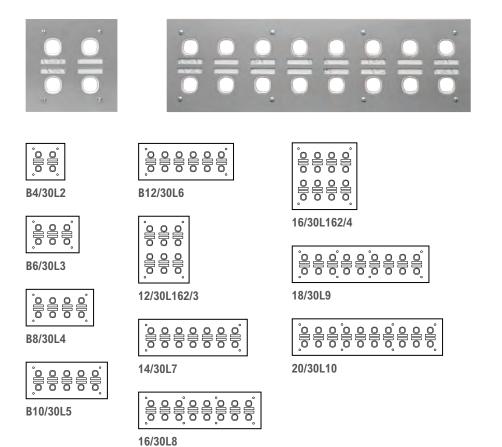


Product Details

Multi-Gang Switch Assemblies - Labelled Versions (Less Mechanisms) - Stainless Steel

Fascia	Wall Box

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
20/30L162/5	20-Gang Labelled Switch Plate. 4 rows of 5. Stainless steel.	257mm	215mm	162/5	232 x 194 x 58mm
22/30L11	22-Gang Labelled Switch Plate. 2 rows of 11. Stainless steel.	533mm	120mm	164/11	508 x 97 x 58mm
24/30L162/6	24-Gang Labelled Switch Plate. 4 rows of 6. Stainless steel.	303mm	215mm	162/6	278 x 194 x 58mm
24/30L163/4	24-Gang Labelled Switch Plate. 6 rows of 4. Stainless steel.	211mm	310mm	163/4	186 x 290 x 58mm
28/30L162/7	28-Gang Labelled Switch Plate. 4 rows of 7. Stainless steel.	349mm	215mm	162/7	324 x 194 x 58mm
30/30L163/5	30-Gang Labelled Switch Plate. 6 rows of 5. Stainless steel.	257mm	310mm	163/5	232 x 290 x 58mm
32/30L162/8	32-Gang Labelled Switch Plate. 4 rows of 8. Stainless steel.	395mm	215mm	162/8	370 x 194 x 58mm
36/30L163/6	36-Gang Labelled Switch Plate. 6 rows of 6. Stainless steel.	303mm	310mm	163/6	278 x 290 x 58 mm
40/30L162/10	40-Gang Labelled Switch Plate. 4 rows of 10. Stainless steel.	487mm	215mm	162/10	462 x 194 x 58mm
42/30L163/7	42-Gang Labelled Switch Plate. 6 rows of 7. Stainless steel.	487mm	310mm	163/7	324 x 290 x 58mm
44/30L162/11	44-Gang Labelled Switch Plate. 4 rows of 11. Stainless steel.	533mm	215mm	162/11	508 x 194 x 58mm





		وااه
.		9

20/30L162/5

0 0	000	000	00
l 0	0	0	0

22/30L11


999	888 .

24/30L162/6

	0	- 00 -	0 - 00 -
	<u>_</u>	<u>_</u>	<u>_</u>
			<u></u>
	0		<u>0</u>
	6		6

24/30L163/4


28/30L162/7




30/30L163/5

؈	0	<u>°</u>	0, 2	<u>o</u> (, O,	0	<u>o</u>
8	6	0	7	₹ '	ō	7	7
2	<u>e</u> ,	<u> </u>	9	≗ :	<u>_</u>	2	2
O	O	0 7	0	o i	O	Ō	O


32/30L162/8




36/30L163/6



44/30L162/11



40/30L162/10



42/30L163/7


Multi-Gang Switch Assemblies - Labelled Versions (Less Mechanisms) - Stainless Steel


Fascia Wall Box

Catalogue No.	Description	Length	Width	Catalogue No.	Width x Height x Depth
48/30L163/8	48-Gang Labelled Switch Plate. 6 rows of 8. Stainless steel.	395mm	310mm	163/8	370 x 290 x 58mm
52/30L162/13	52-Gang Labelled Switch Plate. 4 rows of 13. Stainless steel.	625mm	215mm	162/13	600 x 194 x 58mm
54/30L163/9	54-Gang Labelled Switch Plate. 6 rows of 9. Stainless steel.	441mm	310mm	163/9	416 x 290 x 58mm
56/30L162/14	56-Gang Labelled Switch Plate. 4 rows of 14. Stainless steel.	487mm	310mm	162/14	646 x 194 x 58mm
60/30L162/15	60-Gang Labelled Switch Plate. 4 rows of 15. Stainless steel.	717mm	215mm	162/15	692 x 194 x 58mm
60/30L163/10	60-Gang Labelled Switch Plate. 6 rows of 10. Stainless steel.	395mm	310mm	163/10	462 x 290 x 58mm










48/30L163/8

56/30L162/14


888	



52/30L162/13

60/30L162/15

0	0		0
		2	
	6,6		



54/30L163/9

60/30L163/10

Product Details

Labelled Mechanisms

In addition to labelling or plate engraving, one of the more popular forms of labelling is to 'laser etch' or 'hot stamp' the 30 Series Mechanisms with your preferred message. There are a number of standard messages available that are shown below.

Clipsal can provide one, two or three rows of text. Font sizes are typically 1.9mm high and font style is 'Helvetica Narrow'.

Message Mechanisms

Catalogue No.	Labelled	Catalogue No.	Labelled
30ACM	AIR CON	30PM	DISPOSAL
30AM	ALARM	30DM	DINE
30BM	BATH	30EM	EXHAUST
30BDM	BED	30FAM	FAMILY
30BD1M	BED 1	30FM	FAN
30BD2M	BED 2	30MFD	FRIDGE
30BD3M	BED 3	30HM	HEAT
30BD4M	BED 4	30HLM	HI / LO
30COM	COOL	30KM	KITCHEN
30DNM	DAY / NIGHT	30LM	LIGHT







30ACM



30BD1M



30COM



30EM



30HM



30AM



30BD2M



30DNM



30FAM



30HLM



30BM



30BD3M



30PM



30FM



30KM



30BDM



30BD4M



30DM



30MFD



30LM

Message Mechanisms

Catalogue No.	Labelled	Catalogue No.	Labelled
30LOM	LOUNGE	30YM	WASH
30MAM	MAN – AUTO	30XM	WASTE
30MMW	MICROWAVE	30MZ1	ZONE 1
30M-MIRROR	MIRROR	30MZ2	ZONE 2
30FNM	OFF/ON	30MZ3	ZONE 3
30MOS	OUTSIDE	30MZ4	ZONE 4
30PUM	PUMP	39M	HI/OFF/LO
30RUM	RUMPUS	39MSON	SENSOR/OFF/ON
30MSEN	SENSOR	39MUOD	UP/OFF/DOWN
30STM	STUDY	39МАОМ	AUTO/OFF/MAN
30TM	TV		







30LOM



30MOS



30TM



30MZ3



39MAOM



30MAM



30PUM



30YM



30MZ4



30MMW



30RUM



30XM



39M



30M-MIRROR



30MSEN



30MZ1



39MSON



30FNM



30STM



30MZ2



39MUOD


Product Details

Multi-Gang Wall Boxes

All Clipsal Metal Plate Wall Boxes are manufactured from 0.9mm steel and are bright electro-galvanised. They are solidly spot-welded together and ample knock-outs are provided with cable entry from all directions. They are drilled and tapped to mount standard pattern mounting accessories with 84mm x 46mm increment centres.

The corresponding Clipsal metal wall boxes designed for use with multigang switch panels are shown in the accompanying multi-gang switch panel tables. More information on these wall boxes is shown on the following pages, as well as on the mounting accessories cross-reference chart shown at the back of this book.

It is important to note that when used with multi-gang switch panels or specific oversized 'B' style metal plates, wall boxes must be set a minimum of 16mm below the finished wall surface. This provides enough clearance for grid plate assemblies and also for adjustment on uneven walls.



164/3



162/4



163/4

Step-By-Step Installation of a Multi-Gang Switch Panel



Step 1.

Mark out location of multi-gang wall box (use outside of wall box as a guide).



Step 2.Cut-out wall box position.



Step 3.Knock out appropriate cable entry points (ensure sharp edges are removed). Insert wall box.



Step 4. Ensuring wall box is a minimum of 16mm below finished wall surface, screw-fix to wall stude



Step 5. Insert switch mechanisms (supplied separately) into grid plate.



Step 6.Connect cables to switch mechanisms.
Back off adjustment screws 'Y' in grid plate.



Step 7. Insert fixing screws 'Z' through grid plate and engage into wall box mounting holes. Place a straight edge on finished wall face across switch assemblies.




Adjust screws 'Y & 'Z' in and out until all shoulders on moulded mechanism clips align with finished wall face.



Place metal facia (cover plate) over mechanisms and secure with screws 'X' to grid plate.



Step 10. Finished installation.



Product Details


Metal Wall Boxes – 164 Series (Single Height Versions)


Catalogue No.	Description	Length	Width	Depth	Mounting Centres		
	Metal Wall Box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised, for poured concrete (suits universal wall construction).						
164/2	2-Gang Metal Wall Box, single height.	96mm	97mm	58mm	84mm x 46mm		
164/3	3-Gang Metal Wall Box, single height.	142mm	97mm	58mm	84mm x 46mm		
164/4	4-Gang Metal Wall Box, single height.	188mm	97mm	58mm	84mm x 46mm		
164/5	5-Gang Metal Wall Box, single height.	234mm	97mm	58mm	84mm x 46mm		












For the following items please contact Customer Care or local Sales Representative for availability.

Metal Wall Boxes – 164 Series (Single Height Versions)

Catalogue No.	Description	Length	Width	Depth	Mounting Centres		
	Metal wall box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised, for poured concrete (suits universal wall construction).						
164/6	6-Gang Metal Wall Box, single height.	280mm	97mm	58mm	84mm x 46mm		
164/7	7-Gang Metal Wall Box, single height.	326mm	97mm	58mm	84mm x 46mm		
162/8	8-Gang Metal Wall Box, single height.	372mm	97mm	58mm	84mm x 46mm		
164/9	9-Gang Metal Wall Box, single height.	418mm	97mm	58mm	84mm x 46mm		
164/10	10-Gang Metal Wall Box, single height.	464mm	97mm	58mm	84mm x 46mm		
164/11	11-Gang Metal Wall Box, single height.	510mm	97mm	58mm	84mm x 46mm		
164/12	12-Gang Metal Wall Box, single height.	556mm	97mm	58mm	84mm x 46mm		
162/13	13-Gang Metal Wall Box, single height.	600mm	97mm	58mm	84mm x 46mm		

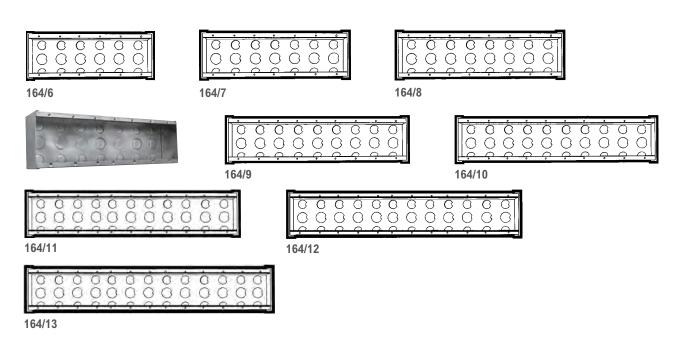



For the following items please contact Customer Care or local Sales Representative for availability.


Metal Wall Boxes – 162 Series (Double Height Versions)


Catalogue No.	Description	Length	Width	Depth	Mounting Centres		
	Metal wall box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised, for poured concrete (suits universal wall construction).						
162/3	3-Gang Metal Wall Box, double height.	140mm	194mm	58mm	84mm x 46mm		
162/4	4-Gang Metal Wall Box, double height.	186mm	194mm	58mm	84mm x 46mm		
162/5	5-Gang Metal Wall Box, double height.	232mm	194mm	58mm	84mm x 46mm		
162/6	6-Gang Metal Wall Box, double height.	278mm	194mm	58mm	84mm x 46mm		
162/7	7-Gang Metal Wall Box, double height.	324mm	194mm	58mm	84mm x 46mm		
















For the following items please contact Customer Care or local Sales Representative for availability.


Metal Wall Boxes – 162 Series (Double Height Versions)


Catalogue No.	Description	Length	Width	Depth	Mounting Centres		
	Metal wall box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised, for poured concrete (suits universal wall construction).						
162/8	8-Gang Metal Wall Box, double height.	370mm	194mm	58mm	84mm x 46mm		
162/9	9-Gang Metal Wall Box, double height.	416mm	194mm	58mm	84mm x 46mm		
162/10	10-Gang Metal Wall Box, double height.	462mm	194mm	58mm	84mm x 46mm		
162/12	12-Gang Metal Wall Box, double height.	554mm	194mm	58mm	84mm x 46mm		
162/14	14-Gang Metal Wall Box, double height.	646mm	194mm	58mm	84mm x 46mm		














162/10 162/12

162/14


Product Details


For the following items please contact Customer Care or local Sales Representative for availability.


Metal Wall Boxes – 163 Series (Triple Height Versions)


Catalogue No.	Description	Length	Width	Depth	Mounting Centres	
	Metal Wall Box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised, for poured concrete (suits universal wall construction).					
163/4	4-Gang Metal Wall Box, triple height.	189mm	289mm	58mm	84mm x 46mm	
163/5	5-Gang Metal Wall Box, triple height.	235mm	289mm	58mm	84mm x 46mm	
163/6	6-Gang Metal Wall Box, triple height.	278mm	289mm	58mm	84mm x 46mm	
163/7	7 Gang Metal Wall Box, triple height.	324mm	289mm	58mm	84mm x 46mm	












163/7


For the following items please contact Customer Care or local Sales Representative for availability.


Metal Wall Boxes – 163 Series (Triple Height Versions)

Catalogue No.	Description	Length	Width	Depth	Mounting Centres		
	Metal wall box supplied with fixed nuts, precision stamped from 0.9mm strip bright electro-galvanised steel, for poured concrete (suits universal wall construction).						
163/8	8-Gang Metal Wall Box, triple height.	370mm	289mm	58mm	84mm x 46mm		
163/9	9-Gang Metal Wall Box, triple height.	416mm	289mm	58mm	84mm x 46mm		
163/10	10-Gang Metal Wall Box, triple height.	462mm	289mm	58mm	84mm x 46mm		









163/8 163/9 163/10

Product Details



Switched Socket Outlets

Clipsal offer a complete range of Switched Socket Outlets to match the Metal Plate Flush Switches. 'A', 'B' and 'BSL' style plates are available in both stainless steel and brass finishes.

They are perfect for use in commercial areas where chemical resistance is required (the moulded area of the socket outlet and switches is chemical resistant), but are also great for use in hotels, foyers, hospitals, security areas, government buildings, up-market homes, kitchen splashbacks and schools. All models are double insulated.

The prestigious look of the Metal Plate Switched Socket Outlets make them a fantastic feature in commercial environments and also stainless steel kitchens (anywhere where a prestigious look is desired).

It is worth noting that the BSL25A Twin Switched Socket is designed so it can be fitted to most standard wall clips, brackets and boxes, without the need for any special mounting requirements or changes to installation methods.

'A' Style Stainless Steel Single Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
A15A, A15/15A, A15/15NA	115mm	70mm	30mm	84mm apart
A15M, A15/15M	105mm	55mm	28mm (rear projection)	84mm apart



A15A

	Description
A15A	Single Switched Socket Outlet, 250V, 10A, deep curved – stainless steel.
A15/15A	Single Switched Socket Outlet, 250V, 15A, deep curved – stainless steel.
A15/15NA	Single Switched Socket Outlet, 250V, 15A, deep curved, with shutter and neon – stainless steel.
A15M	Single Switched Socket Outlet Mechanism, 250V, 10A.
A15/15M	Single Switched Socket Outlet Mechanism, 250V, 15A.



A15M





A15A

A15/15A





A15/15NA

A15/15M



A15M

Product Details

"A" Style Polished Brass Single Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	115mm	70mm	30mm	84mm apart

	Description
BA15A	Single Switched Socket Outlet. 250V, 10A, deep curved – polished brass.



BA15A

"A" Style Stainless Steel Lockable Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	115mm	70mm	45mm	84mm apart

	Description
A15YA	Single Switched Socket Outlet. 250V, 10A, deep curved, lockable flap on socket. Front projection with flap closed is 27mm. Hole for padlock is 8mm diameter – stainless steel.



A15YA

'B' and 'BSL' Style Stainless Steel Single Switched Socket Outlets - Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
BSL15A, BSL15XA, BSL15LA	130mm	85mm	35mm	84mm apart
B15/15A	115mm	70mm	30mm	84mm apart
B15M	95mm	55mm	32.5mm	84mm apart



BSL15A

	Description
BSL15A	Single Switched Socket Outlet, 250V, 10A, flat plate, stainless steel fascia. Cut out: 76mm L x 43mm W.
BSL15XA	Single Switched Socket Outlet, with extra removable switch, 250V, 10A, flat plate, stainless steel fascia. Cut out: 77mm L x 53mm W.
BSL15LA	Single Switched Socket Outlet, 250V, 10A, flat plate, with round Earth pin, stainless steel fascia. Cut out: 76mm L x 43mm W.
B15/15A	Single Switched Socket Outlet, 250V, 15A, flat plate, stainless steel fascia.
B15M	Single Switched Socket Outlet Mechanism, 250V, 10A.



BSL15LA



B15M

Note: neons, shutters,and socket outlet mechanisms are available only in the B Series (not BSL).



B15/15A

BSL15A





B15M

BSL15XA



BSL15LA

Product Details

'BBSL' Style Polished Brass Single Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
BBSL15A, BBSL15XA, BBSL15LA, BBSL15/15A	130mm	86mm	28mm	84mm apart



R	RSI	1 1	5/	١

	Description
BBSL15A	Single Switched Socket Outlet, 250V, 10A, flat plate, polished brass fascia. Cut out: 76mm L x 43mm W.
BBSL15XA	Single Switched Socket Outlet, 250V, 10A, flat plate, with extra removable switch, polished brass fascia. Cut out: 77mm L x 53mm W.
BBSL15LA	Single Switched Socket Outlet, 250V, 10A, flat plate, with round Earth pin, polished brass fascia.
BBSL15/15A	Single Switched Socket Outlet, 250V, 15A, flat plate – polished brass.



BBSL15XA



BBSL15LA



BBSL15/15A

'A' Style Stainless Steel Twin Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	130mm	86mm	28mm	84mm apart

	Description
A25A	Twin Switched Socket Outlet, 250V, 10A, deep curved, stainless steel fascia.



A25A

Product Details

'A' Style Polished Brass Twin Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres	
All Products	130mm	86mm	28mm	84mm apart	
	Description				
BA25A	Twin Switched Socket Outlet, 250V, 10A, deep curved, polished brass fascia.				



BA25A

'BSL' Style Stainless Steel Twin Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Lengui	vviutii	Dehiii	Mounting Centres
All Products	130mm	86mm	35mm	84mm apart

	Description
BSL25A	Twin Switched Socket Outlet, 250V, 10A, flat plate, stainless steel fascia.
BSL25XA	Twin Switched Socket Outlet, 250V, 10A, flat plate, with extra removable switch, stainless steel fascia.

Recommended cut outs: BSL25A 77mm L x 57mm W $BSL25XA \ 112.5mm \ L \ x \ 73.5mm$

BSL25A can be mounted on standard mounting accessories. However, BSL25XA require the 154B25 mounting bracket for installation (order separately). 15A models are available upon request.



BSL25A



BSL25XA

Product Details

'BB' and 'BBSL' Style Polished Brass Twin Switched Socket Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	130mm	86mm	35mm	84mm apart

	Description
BBSL25A	Twin Switched Socket Outlet, 250V, 10A, flat plate, polished brass fascia.
BBSL25XA	Twin Switched Socket Outlet, 250V, 10A, flat plate, with removable extra switch, polished brass fascia.



BBSL25A can be mounted on standard mounting accessories. However, BBSL25XA require the 154B25 mounting bracket for installation (order separately). 15A models are available upon request.



BBSL25A



BBSL25XA

'B' Style Stainless Steel Universal Shaver Outlets – Horizontal Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	186mm	95mm	90mm*	L157 x W64mm (fascia)

	Description
В727Н	Universal Shaver Outlet, 240V-110V, includes 727VHB wall box, flat plate, stainless steel fascia.



B727H

Note: without wall box the depth is 70mm, wall box mounting centres are 152mm apart. There is also a grid frame between the wall box and the front fascia plate. Stainless steel depth is 1.6mm.

Product Details

'A' Style Stainless Steel Single Switched Socket Outlets – Vertical Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
A15VA	115mm	70mm	35mm	84mm apart*
A15VM	105mm	55mm	28mm	84mm apart

	Description
A15VA	Single Switched Socket Outlet, 250V, 10A, deep curved, stainless steel fascia.
A15VM	Single Switched Socket Outlet Mechanism, 250V, 10A.



A15VA



A15VM

^{*} Cover plate mounting centres are 30mm apart

'B' Style Stainless Steel Single Switched Socket Outlets – Vertical Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
B15VA	115mm	70mm	35mm	84mm apart*
B15VM	95mm	55mm	32.5mm	84mm apart

	Description
B15VA	Single Switched Socket Outlet, 250V, 10A, flat plate, stainless steel fascia.
B15VM	Single Switched Socket Outlet Mechanism, 250V, 10A.



B15VA



B15VM

Recommended cut outs: 96mm L x 56mm W.

* Cover plate mounting centres are 30mm apart

Catalogue No. Length

'B' Style Polished Brass Single Switched Socket Outlets – Vertical Mounting

Width

All Products	115mm	70mm	35mm	84mm apart		
	Description					
BB15VA	Single Switched Socket Outlet, 250V, 10A, flat plate, polished brass fascia. Cut outs: 96mm L x 56mm W.					

Depth

Mounting Centres




BB15VA

Product Details

'B' Style Stainless Steel Twin Switched Socket Outlets – Vertical Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres	
All Products	115mm	115mm	35mm	84mm apart (2 sets)	
	Description				
B15V2A	Twin Switche	ed Socket Ou	itlet, 250V, 10A,	flat plate, stainless steel fascia.	

Recommended cut outs: 104mm L x 96mm W.




'B' Style Brass Twin Switched Socket Outlets – Vertical Mounting

Catalogue No.	Length	Width	Depth	Mounting Centres
All Products	115mm	115mm	35mm	84mm apart (2 sets)

	Description
BB15V2A	Twin Switched Socket Outlet, 250V, 10A, flat plate, polished brass fascia.


Recommended cut outs: 104mm L x 96mm W.





BB15V2A

Product Details

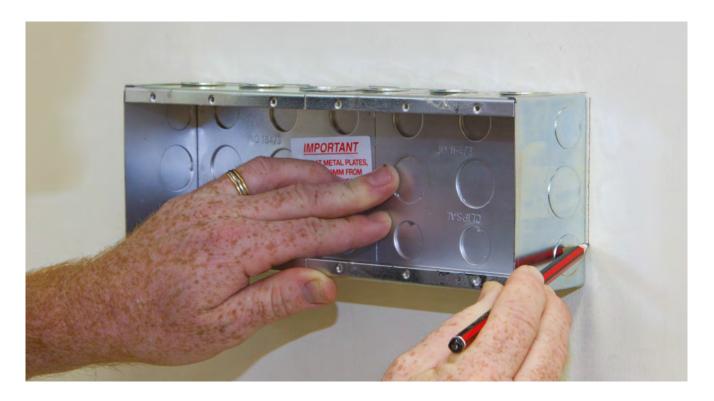

Mounting Accessories & Spacers

Generally, the single gang Metal Plate range of switches and switched sockets can be mounted to all Clipsal standard pattern mounting accessories. Unless using mounting accessories with recessed mounting centres (e.g. 157/1PRM Wall Box, 155PRM Mounting Bracket, 155NAR Nail Bracket or 154RM Wall Clip), the mounting accessory face should be set back 10mm (minimum) from the finished wall surface. This is necessary to allow 'B' style or some 'BSL' style grid plates and mechanisms to be located in the wall cavity between the plate underside and the mounting accessory.

As the 'A' style range has it's grid plate assembly located predominantly in front of the wall surface, the need to set back any associated mounting accessories for this range is not required.

Mounting Clips

The BSL25XA is supplied with an oversized rear grid plate. To assist with installing this product in cavity walls, it is recommended to use the 154B25 Wall Mounting Clip. The mounting clip sits behind the wall cavity when used in conjunction with longer mounting screws; it secures the BSL25XA firmly against the wall. Some custom 'BSL' products may also require a 154B25 Mounting Clip.

'B' Style Wall Box Spacers

Catalogue No.	Length	Width	Depth	Mounting Centres
154B25	110mm	96mm	20mm	84mm



	Description
154B25	Metal Wall Clip for cavity wall mounting of BSL25XA

154B25

Product Details



Switch Mechanisms

Clipsal's unique "dolly" switch was developed in 1971 and proved to be a great leap forward. Unsatisfied with the hard lines of traditional switch rockers at the time, Clipsal engineers fashioned a more stylish alternative. The Standard range of switch and socket outlets was the first to use the new switch.

Over the years, this Clipsal switch has undergone very subtle changes to adapt to new technologies, plastics and designs. But to the naked eye the original design remains unchanged and is as strong today as it was many years ago. Today, you'll find the Clipsal switch shape in dozens of different switch models, ranging from the traditional 30M to the latest 30PB Push-Button, with blue LED. The following pages provide information on Clipsal's switch mechanism ranges.

For further information on labelled mechanisms refer to pages 58 to 59.

The shape of the switch "dolly" is a trademark (TM) of Clipsal by Schneider Electric.

Catalogue No.	Description
30M	250V/10A, 1-Way/2-Way. Terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. Body fits 22mm ø hole. M rating is 100.
30MRD	250V/10A, 1-Way/2-Way with red dolly mark. Terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. Body fits 22mm ø hole. M rating is 100.
30USM	250V/20A 16AX. 1-way/2-way, universal rocker. Accommodates 4x 1.5mm² cables or 3 x 2.5mm² cables.







30M

Catalogue No.	Description
30RSM2	250V/15A, Rotary (2 On – 2 Off). Also suitable for 12V d.c. 15A, audio and control applications. Switch positions indicated in window. M rating is 50.
30RSM3	250V/15A, Rotary (3 On – 1 Off). Also suitable for 12V d.c. 15A, audio and control applications. Switch positions indicated in window. M rating is 50.



30RSM2

Catalogue No.	Description
30MCO	250V/10A, Changeover Double Throw (selects alternate circuits).
30MI	250V/10A, Intermediate. 4 terminals of 3.5mm ø accommodates 2 x 2.5mm² cables. Body fits 22mm ø hole.





30MC0

Product Details

Catalogue No.	Description
30MBP	250V/15A, Bell Press. Facility for momentary ON or OFF. 1 looping terminal.
30MBPN	250V/15A, Illuminated Bell Press. Facility for momentary ON or OFF. Neon is connected across terminals 1 and 4. Alternative lamp voltages available.
30MBPR	250V/10A Bell Press Rocker. Facility for momentary ON or OFF. Suitable for extra low voltage applications. 1 looping terminal.







30MBP

30MBPN

30MBPR

Catalogue No.	Description
30PB	250V/20 16AX, 1-Way/2-Way Push-Button (no LED indicator). Accommodates 4 x 1.5mm² cables or 3 x 2.5mm² cables
30РВВР	250V/16A, Momentary Push-Button (no LED indicator). Accommodates 4 x 1.5mm² cables or 3 x 2.5mm² cables
30PBI	250V/16A 10AX, Intermediate Push-Button. Accommodates 4 x 1.5mm² cables or 3 x 2.5mm² cables
30PBL	250V/20AMP 16AX, 1-Way/2-Way Push-Button (with blue LED indication). Accommodates 4 x 1.5mm² cables or 3 x 2.5mm² cables
30PBBPL	250V/16A, Momentary Push-Button (with blue LED indicator). Accommodates 4 x 1.5mm² cables or 3 x 2.5mm² cables











30PB

30PBBP

30PBI

30PBL

Catalogue No. Description

250V/10A, 1-Way Double Pole Single Throw. Terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. Body fits 22mm ø hole. M rating is 90.

30HMD 250V/10A, Double Pole – marked HEAT.

30MD2 250V/10A, 2-Way, Double Pole Double Throw. 6 terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. M rating is 75.

30MD20 250V/20A, 1-Way Double Pole. 4 terminals of 1.5mm ø accommodate 3 x 2.5mm² cables. Body fits 34mm ø hole. M rating is 100.

30M35 250V/35A, 1-Way/2-Way. Terminal bore of 3.6mm ø and looping terminal bore of 3.9mm ø. M rating is 160.











30MD2

30MD20

30HMD

Metal Plate Product Overview Catalogue

Catalogue No.	Description
30/1/2LM	250V/10A, 1-Way Rocker. 2 looping terminals. Terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. Body fits 22mm ø hole. M rating is 100.
30/1ELM	250V/10A, 1-Way Rocker. 1 looping and 1 Earth terminal – terminal bores of 4.1mm ø accommodate 4 x 1.5mm² or 3 x 2.5mm² cables. Body fits 22mm ø hole. M100 rating
30/1NM	250V/10A, 1-Way Rocker (with neon indicator). Neon can be wired to indicate "ON", "OFF" or "POWER AVAILABLE". Looping/switch terminal bores of 4.1mm ø. Body fits 34mm ø hole (note: Neutral required).
30/2NM	250V/10A, 2-Way Rocker (with neon indicator). Neon can be wired to indicate "ON", "OFF" or "POWER AVAILABLE". Looping/switch terminal bores of 4.1mm ø. Body fits 34mm ø hole (note: Neutral not required if wiring neon to be permanently ON when load is OFF).
30TKM	250V/20A (5A fluorescent load), 1-Way/2-Way Toggle Key Actuated. 1 looping terminal. M rating is 100.







30/1ELM



30/1NM



30/2NM



30TKM

Catalogue No.	Description
39M	250V/10A, 3 Position. Labelled HI-OFF-LO. 3 terminals, 3.5mm ø. Accommodates 2 x 2.5mm² cables
39МАОМ	250V/10A, 3 Position. Labelled MAN-OFF-AUTO. 3 terminals, 3.5mm ø. Accommodates 2 x 2.5mm² cables
39MSON	250V/10A, 3 Position. Labelled SENSOR-OFF-ON. 3 terminals, 3.5mm ø. Accommodates 2 x 2.5mm² cables
39MUOD	250V/10A, 3 Position. Labelled UP-OFF-DOWN. 3 terminals, 3.5mm ø. Accommodates 2 x 2.5mm² cables



39M



39MAOM



39MSON



39MUOD

Neon Indicator Mechanisms

Catalogue No.	Description
30N-RED	250V, Neon Indicator (red).
30N-COLOUR	250V, Neon Indicator (other colours).



30N-RED



30N-COLOUR

Product Details

Dimmer, Fan Control and Surge Filter Mechanisms

Catalogue No.	Description
30SFM	Surge Filter Mechanism, 250V 10A. Protects equipment from transient spikes or surges. Maximum clamping voltage (8/20µs, 100A) 710V.
31E2PUDM	Dimmer – Single Mechanism. Does not require separate switch. ON/OFF push-button, universal, 250V/350W.
32ELEDM	Dimmer Mechanism, LED. Suits dimmable LED lamps. 220- 240V/400W.
32E450UDM	C-Thru® Dimmer Mechanism, Universal. Suits incandescent lighting, halogen/dichroic lamps and low voltage lighting using iron core or electronic transformers. 220- 240V/450W. Also suitable to control small motor loads such as ceiling sweep and exhaust fans.
32E500FM	C-Thru® Fan Speed Controller Mechanism. 220-240V/500W.



PLEASE SUPPLY A0005451.JPG



32ELEDM







C-Bus 30 Mechanism Wall Switches

Catalogue No.	Description
5031NMMIRL	IR capable C-Bus master mechanism for Clipsal 30 series aperture, gridplates and enclosures.
5031NMML	C-Bus master mechanism for Clipsal 30 series apertures, gridplates and enclosures.
5031NMS	C-Bus slave mechanism for Clipsal 30 series apertures, gridplates and enclosures.



5031NMMIRL



5031NMML



5031NM9

Switch Mechanism Mounting Accessories

The following mounting accessories are used for mounting mechanisms in a panel or enclosure. The B30GFZ Mounting Clip is a standard and crucial component of the multi-gang grid assemblies and is held in by fixing screws. The P30GFZ and 539 Mounting Clips are also anchored by fixing screws. However, the F30Z Series is a range of mounting clips that 'push-fit' into panel apertures.

Circuit Identification and Blanking Products

Catalogue No.	Description
B30GFZ	Mounting Clip with Moulded Surround. Suits 30 Series Mechanisms. 36mm mounting centres for outer fixing screws.
P30GFZ	Mounting Clip with Moulded Surround. Suits P30 Series Mechanisms. 55.6mm diagonal mounting centres for fixing screws.
F30Z1	Mounting Clip. Suits 1mm thick sheet.
F30Z1.5	Mounting Clip. Suits 1.5mm thick sheet.
F30Z2	Mounting Clip. Suits 2mm thick sheet.
F30Z4	Mounting Clip. Suits 4mm thick sheet.







P30GFZ



F30Z1



F30Z1.5



F30Z2



Circuit Identification Products

Clipsal offers a range of blanking plugs for circuit identification products to provide added flexibility, safety and secure labelling.

Circuit Identification and Blanking Products

Catalogue No.	Description
30P	Removable Blank Plug to suit or blank out 30 Series aperture
30PID	30 Series ID Circuit Plug – tamper proof.
30PIDA4L*	Sheets, 10 x A4 packet, available in white only (non-adhesive).

^{*}Software for printing these Label Sheets is available on the Clipsal eCatalogue








30PIDA4L

Product Details

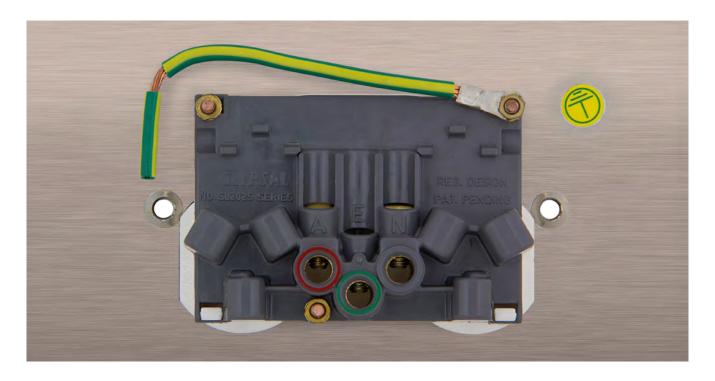

Safety & Cleaning Guidelines

Installation Safety

All electrical products should be installed by a licensed electrician to Australian and New Zealand Wiring Rules AS/NZS 3000.

Earthing Safety

Where required Metal Plate products are provided with Earthing points to ensure safety requirements are met. For example: either a crimp lug or crimp lug with Earth strap are provided on the back of BSL cover plates.

Cleaning Guidelines

It is not recommended to spray cleaning products directly on to electrical switches or sockets. Before applying ensure that switches or sockets are isolated (switched off). Cleaning sprays should be sprayed onto a clean cloth before applying to the cover plate. Do not use any cleaning sprays on moulded parts, such as switches or sockets - only wipe down with damp or dry cloth.

Stainless Steel

When cleaning Metal Plate, stainless steel abrasive cleaners (e.g. Silvo) should not be used. The Stainless Steel Metal Plate range can be cleaned by approved products such as 3M™ Stainless Steel Cleaner and Polish. It leaves behind a light protective film to reduce fingerprints and smudges. It also leaves a streak-free finish.



Polished Brass

The polished brass Metal Plate range is specially coated to prevent tarnishing. The coating protects the polished brass finish and eliminates the need for polishing.

To clean the plate, simply wipe with a wax based cleaner (e.g. Mr. Sheen). Under no circumstances use abrasive cleaners (either liquid or powder), brass polish (e.g. Brasso), or solvent cleaners. Such use could result in surface damage and tarnishing may occur.




Plastic Mouldings

The majority of the Metal Plate products are supplied with plastic grid assemblies, which are resistant to most common chemicals and cleaning agents. For more information please contact your Clipsal Representative.



Wiring & Connection Diagrams

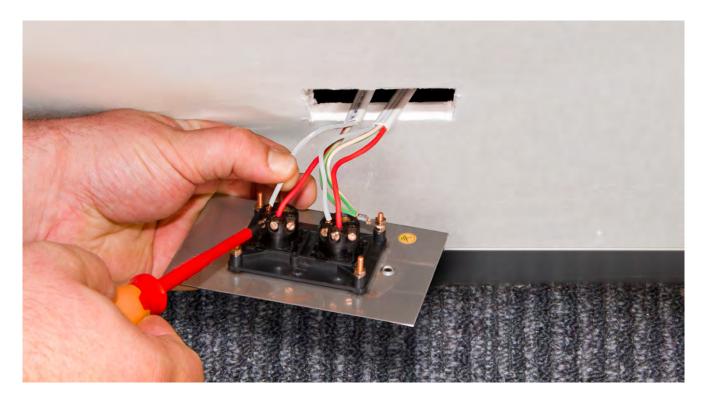

Wiring and Connection Diagrams


Clipsal Mechanisms provide the flexibility to control various loads, particularly in residential or commercial applications. The terminal designs come in an array of shapes and sizes with the majority fitting into the Metal Plate Switch range. Allowance must always be made for wiring space and where required (e.g. dimming) derating of mechanisms.

The following pages provides connection guidelines are so that electrical contractors can determine the suitability of certain mechanisms for specific applications. These wiring and connection methods are to be used as a guide only. It is paramount that selection and installation of these mechanisms comply with local wiring regulations.

For more information on Clipsal Mechanisms, please contact your local Clipsal Sales Office or Representative.


30 Series Switch Mechanism, 10A, 250V a.c.

One-Way Switching

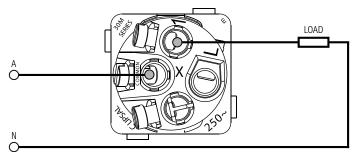




Two-Way Switching

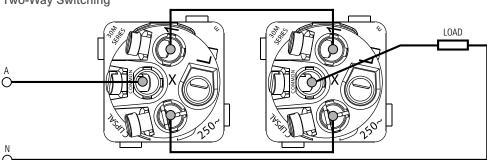


Universal Switch Mechanism, 20A/16AX, 250V a.c.

One-Way Switching

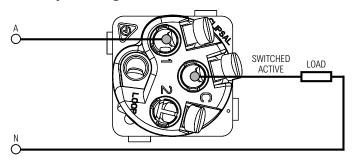




Two-Way Switching

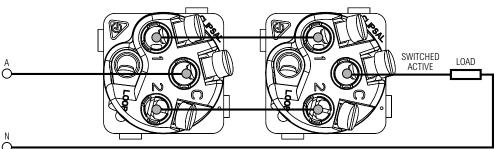

Wiring & Connection Diagrams


Impress Push-Button Mechanism, 20A/16AX, 250V a.c.

No LED fitted – load OFF permanently, ON momentarily

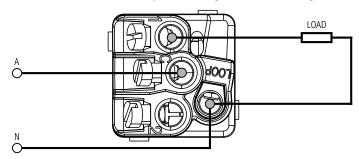




No LED fitted – load ON permanently, ON momentarily

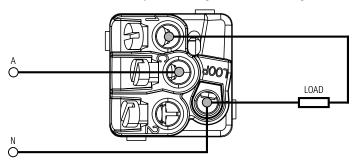


Impress Push-Button Mechanism with LED, 20A/16AX, 250V a.c. One-Way Switching

LED fitted – load OFF permanently, ON momentarily

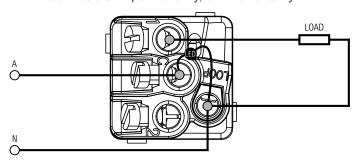




LED fitted – load ON permanently, ON momentarily

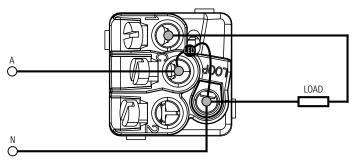


Impress Push-Button Mechanism, 20A/16AX, 250V a.c.

Two-Way Switching, No Neutral Present LED 'ON' Switch 'OFF'

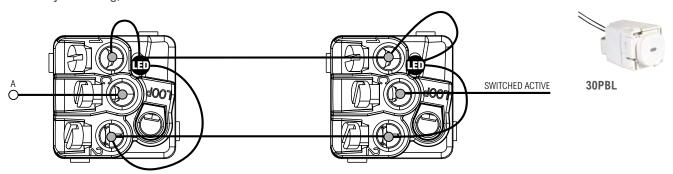


Impress Push-Button Mechanism, 20A/16AX, 250V a.c.

Two-Way Switching, Neutral Present at the Switch LED 'ON' Switch 'ON'

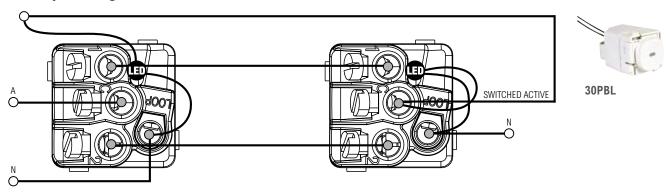


Impress Push-Button Mechanism, 20A/16AX, 250V a.c.

Two-Way Switching, Neutral Present at the Switch LED 'ON' Switch 'OFF'

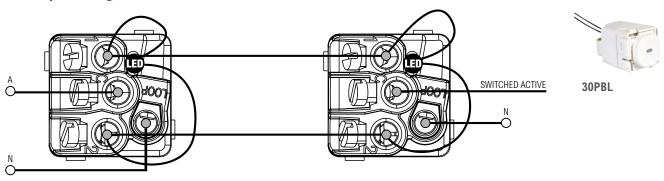


Wiring & Connection Diagrams

Double Pole, Single Throw One-Way Mechanism, 10A/16AX, 250V a.c.

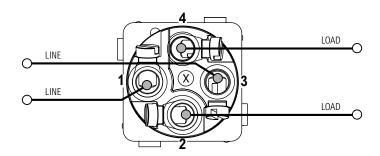




Double Pole, Double Throw Two-Way Mechanism, 10A/16AX, 250V a.c.

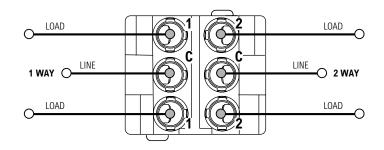



30MD2


Double Pole, One-Way Mechanism, 20A, 250V a.c.

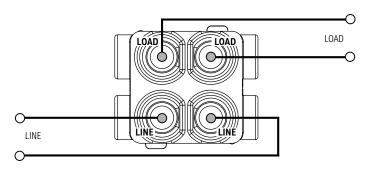




Metal Plate Product Overview Catalogue


Intermediate Switch Mechanism, 10A, 250V a.c.

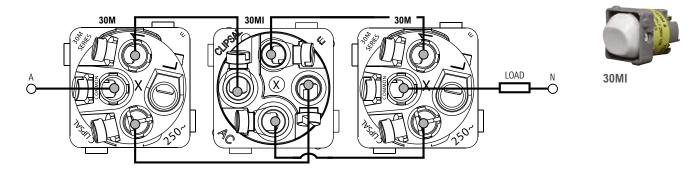

Changeover Switch Mechanism, 10A, 250V a.c.

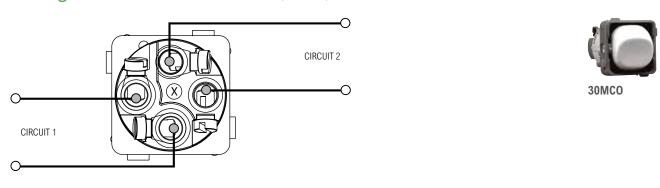


Three Position Switch Mechanism, Marked HI-OFF-LO

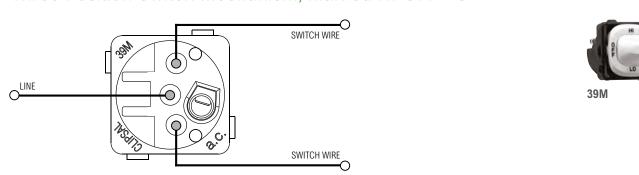


Wiring & Connection Diagrams

Rotary Switch Mechanism, (2 ON, 2 OFF), 15A, 250V a.c.

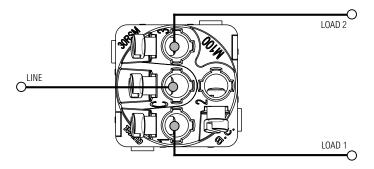




Rotary Switch Mechanism, (3 ON, 1 OFF), 15A, 250V a.c.

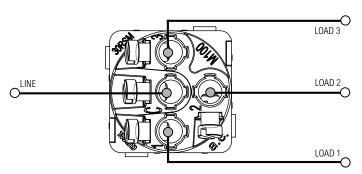




Three Position Switch Mechanism, Marked AUTO-OFF-MAN

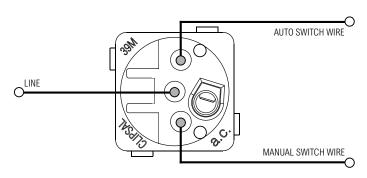




One-Way / Two-Way Switch Mechanism with Dimmer/Fan Controller

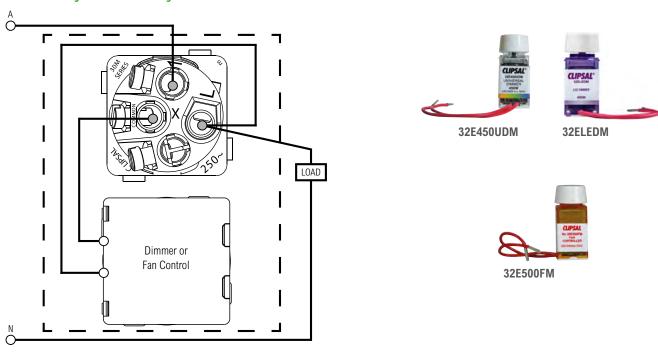

One-Way Switch Mechanism with Two Load Terminals (30/1/2LM) One-Way Switch Mechanism with One Earth and One Loop Terminal (30/1ELM)

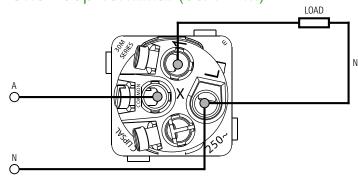




Wiring & Connection Diagrams


One-Way Mechanism with Neon Indicator

To wire neon permanently ON

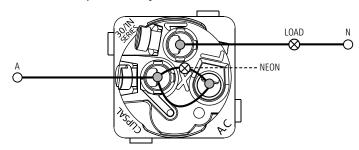




To wire neon ON when switch OFF

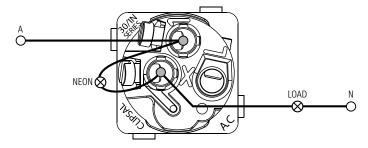


To wire neon ON when switch ON

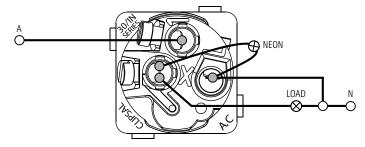


Two-Way Mechanism with Neon Indicator

To wire neon permanently ON

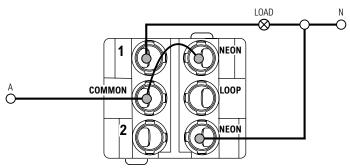




To wire switch ON when switch OFF

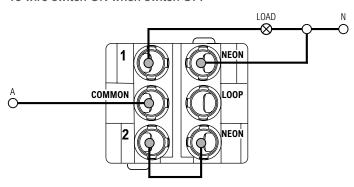


To wire neon ON when switch ON



Wiring & Connection Diagrams


Two-Way Mechanism with Neon Indicator

Two-way switching, to wire neon ON when load is ON

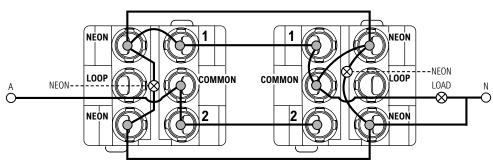




Two-way switching, to wire neon ON when load is OFF

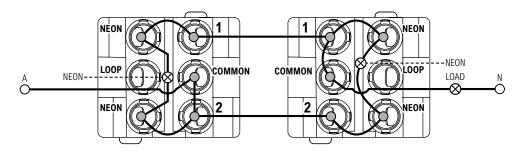


Twin Switched Socket with Extra Switch, 10A, 250V a.c.





BSL25XA

Twin Vertical Switched Socket, 10A, 250V a.c.





B15V2A

Medilec Range



Medilec Range

Clipsal Medilec provides a wide range of electrical equipment for patient treatment areas of hospitals, medical and dental practices as required under AS/NZS3003 Electrical Installations - Patient Areas.

The Medilec range of medical electrical accessories and electrical safety equipment is specifically developed to suit the specialised requirements of the medical industry.

This includes residual current devices (RCDs), line isolation and overload monitors (LIOMs), medical service panels, isolation transformers, equipotential junctions and RCD protected power outlets.

The following pages provide an overview of metal finishes for the Clipsal Health Solutions range. For further details on the Medilec product range go to clipsal.com or contact you local Clipsal Representative.

Bedhead Panels

Medical service panel (MSP) systems are a convenient way of providing bedhead access to services such as power, data, nurse call, medical gas and climate control to patients and medical staff.

The latest generation ML2164, ML2165 and MLH921 MSPs have been developed to meet the current needs of hospitals, which now require less intimidating surroundings and a more relaxed environment. They are also suitable for dental practices, aged care facilities, medical clinics.

ML2164 Series Flush Mounted Metal Plate System

The ML2164 Series fits standard Medilec Wall Boxes and Grids, which can easily be joined together to produce custom length MSPs to suit specialised requirements. This allows for custom wall box assemblies incorporating grids and accessories to be supplied in appropriate time frames.



ML2165 Series Surface Mounted Metal Plate System

The ML2165 Series fits standard Medilec grid plates, with a box that can be quickly modified from pre-cut 2.4m lengths to produce custom length MSPs, suiting the customer's specific requirements. This unique design allows for installation post wall construction, which means the MSP can be supplied fully assembled. This eliminates partial deliveries, and the product can be installed in one operation.



MLH921 Surface Mount Ducting

The MLH921 Series is a range of surface mount extruded aluminium plate medical service panels. The MLH921 Series is designed to incorporate the Medilec ML2000 and Clipsal 2000 Series range of electrical accessories, as well as various OEM products such as nurse call systems and gas outlets.



Alternative Products with Metal Finishes



Alternative Products with Metal Finishes

The Metal Plate range is the ideal choice when looking for electrical accessories with metal finishes. Clipsal also offer many other products with metal or decorative metal finishes to complement your project, including various switch and socket ranges, as well as C-Bus, lighting, ceiling sweep fans or specialty products from the Cable Management range. Clipsal's extensive selection of metal finish products ensures you will always find what you are looking for.

Classic C2000 Series

The smooth curves and sleek lines of the Classic range reflect the latest interior design trends. Remarkable and affordable, the Classic range features a level of quality and elegance that you would expect from electrical switches and power outlets costing much more.



C2031VA-WE plus C2031C-BA Wall switch, 1 button, rectangular

Pictured: Brushed

Saturn Horizon

As recent additions to the stunning Saturn range, Clipsal now offers a textural metallic finish that comes in two fantastic new colours of Horizon Silver and Horizon Black. Horizon features a flat, square edge design that will complement any modern interior.

Horizon Silver and Horizon Black come with a subtle charcoal grey frame and push-buttons that perfectly match the stylish new fascia, and superbly blend in with today's interior design.



4061PBL-HSWall switch, 1-gang push-button with blue LED, rectangular

Pictured: Saturn Horizon Silver

Modena

The Modena 8000 Series is designed with the best form, function and safety features in mind. This classic range comes with larger switches and easy-to-view indicators, tailored with a subtle minimalist finish. The large soft-resistance switch mechanism provides easier operation and practical functionality for all users – including those with limited mobility.

The range of finishes, colours and configurations provides an option to suit any interior décor and perfectly complement a residential or commercial environment. The Modena 8000 Series caters for all applications and specific requirements. From audiovisual and HDMI to push-button dimmer options, Modena 8000 Series is a complete modular switch solution. The Modena 8000 Series surrounds are also compatible with the C-Bus Modena range of wall switches.



M8025-BK & M8000HC-CH Twin socket outlet, rectangular

Pictured: Chrome

Alternative Products with Metal Finishes

C-Bus Wall Switches

If you're keen on keeping the same style of switches throughout your entire home, Clipsal offer their most popular switch styles incorporated with home automation controls, giving you greater choice than ever before.

Clipsal's striking metal switches also incorporate C-Bus control, and are available in high quality stainless steel or polished brass.



B5032NL Wall switch. 2-button, 'B' style flat plate

Pictured: Stainless Steel



BA5032NL Wall switch. 2-button, 'A' style deep curved plate

Pictured: Brass

C-Bus Dynamic Labelling Technology (DLT) Wall Switches

One of the biggest problems people find with home control is the difficulty in remembering which buttons do what. Clipsal have solved that problem with user friendly Dynamic Labelling Technology™ (DLT).

An Australian first, Clipsal's DLT is available in the C-Bus Saturn and Neo Wall Switches and allows the buttons to be electronically labelled according to your needs. The units have eight function buttons over two pages, a backlight for easy viewing, and support up to eight languages.



5085DL-J80 Wall switch 5 button, DLT

Pictured: Stainless

C-Bus Saturn Wall Switches

The C-Bus Saturn range boasts a luxurious face and distinctive illuminated round buttons – and is arguably the most beautiful switch range available. The brushed stainless steel finish is not only stylish but is durable and easy to clean. It is fully programmable and can go beyond simple on/ off functions, delivering unlimited dimming, switching and other control functions as part of a C-Bus control system.



5086NL-J80Wall switch, 6-gang push-button

Pictured: Stainless

C-Bus Reflection Wall Switches

Reflection offers a sleek, contemporary design that is constructed from smooth stainless steel - featuring a flat rectangular switch plate without unsightly screws. The metal-look buttons on the C-Bus Reflection Wall Switches can also be removed for engraving if needed. The switches also feature an inbuilt 'cool blue' LED status indicator.



R5061NL Wall switch 1 button

Pictured: Stainless Steel

Alternative Products with Metal Finishes

Downlights

Clipsal's extensive range of downlights come in a number of styles to suit any budget. They're all available with LEDs.



Led downlight, 9W IP44, 3K/4K/6K

Pictured: White & White with Brushed Chrome Trim. (TPDL1T2BC)

Exterior Lights

Clipsal offers a range of exterior lighting that is sure to meet most of your outdoor lighting requirements. With a focus towards energy efficiency, Clipsal's Exterior Lighting range constantly evolves with the changing market trends and requirements.



TPBHS1 & TPBHS2 IP54 light

Pictured: Metal look

Ceiling Sweep Fans

Clipsal's stylish range of super quiet ceiling sweep fans are a great way to circulate air throughout your home. Ceiling sweep fans will keep you cool in summer and circulate warm air in the winter, helping you save on expensive heating and air conditioning bills.

They are also just as effective outdoors in areas such as verandahs and pergolas to keep you cool on hot days and balmy nights. Clipsal ceiling fans are available with remote control and inbuilt lighting options, and a selection of stainless steel and powder coat finishes, so there's sure to be a ceiling fan to suit your home's décor and requirements.



P3HS1200SS-SS

3-Blade, 1200mm reversible. Satin Chrome body and Stainless Steel blades

Pictured: 3-Blade Ceiling Sweep Fan

Quick Reference Guide - Mounting Accessories Cross Reference Guide

			•				E	
			Switches		Switches	Swit	ches	Electronic Switches
	Cat. No.	B31A BB31A	B32A BB32A	B33A BB33A	BSL31VH - BSL36VH BBSL31VH - BBSL36VH BSL31VA, BBSL31VA BSL32VA, BBSL32VA BSL33VA, BBSL33VA BSL34VA, BBSL34VA BSL35VA, BBSL35VA BSL36VA, BBSL36VA	A31VX BA31VX	B31VX BB31VX	В727Н
	449AS	NS2	DM19	NS4	NS12	YES	NS12	UN
	449ASD	NS2	DM19	NS4	NS12	YES	NS12	UN
ŝ	449A	NS2	DM19	NS4	NS12	YES	NS12	UN
Sloc	238	NS2	DM19	NS4	NS12	YES	NS12	UN
Mounting Blocks	C2449ASD	NS2	DM19	NS4	NS12	YES	NS12	UN
unti	900SPBP	NS2	DM19	NS4	NS12	YES	NS12	UN
Θ W	900SPMB	NS2	DM19	NS4	NS12	YES	NS12	UN
	25ELSB	NS2	DM19	NS4	NS12	YES	NS12	UN
	900SKMB	NS2	DM19	NS4	NS12	NS12	NS12	UN
Heritage Mounting Blocks	1920MB	NS2	DM19	NS4	NS12	YES	NS12	UN
ဟ	154	NS2	DM19	NS4	Y1	YES	YES	UN
Wall Clips	154B25	N13	N13	N13	YES	YES	YES	UN
/a∥ (154RM	NS2	DM19	NS4	Y1	YES	YES	UN
5	154/2	NS2	DM19	NS4	NS12	NS12	NS12	UN
s s	155PRM	NS2	DM19	NS4	Y1X2	YES	YES	UN
Wall ackets i Plate	155P	NS2	DM19	NS4	Y1X2	YES	YES	UN
Wall Brackets and Plates	155	NS2	DM19	NS4	Y1X2	YES	YES	UN
<u>а</u> ш	155NAR	NS2	DM19	NS4	Y1X2	YES	YES	UN
	157/1P	NS2	DM19	NS4	X5	YES	YES	UN
	157/1PRM	NS2	DM19	NS4	X5	YES	YES	UN
	257	NS2	DM19	NS4	X5	YES	YES	UN
	257D	NS2	DM19	NS4	X5	YES	YES	UN
	257D2	NS2	DM19	NS4	NS12	NS12	NS12	UN
Wall Boxes	157	NS2	DM19	NS4	X5	YES	YES	UN
B B	157/1	NS2	DM19	NS4	X5	YES	YES	UN
Wa	157/1X	NS2	DM19	NS4	X5	YES	YES	UN
	157/2	NS2	DM19	NS4	NS12	NS12	NS12	UN
	160	NS2	DM19	NS4	X5	YES	YES	UN
	164	NS2	DM19	NS4	X5	YES	YES	UN
	164/1	NS2	DM19	NS4	X5	YES	YES	UN
	164/2	NS2	DM19	NS4	NS12	NS12	NS12	UN
ted	157/1F	NS2	DM19	NS4	X5	YES	YES	UN
Ra Bo	F157/1	NS2	DM19	NS4	X5	YES	YES	UN
Fire Rated Wall Boxes	157/2F	NS2	DM19	NS4	NS12	NS12	NS12	UN
.es	224/1	NS2	DM19	NS4	NS12	YES	NS12	UN
Enclosures	223H	NS2	DM19	NS4	NS12	YES	NS12	UN
Enc	255	NS2	DM19	NS4	NS12	YES	NS12	UN

YOU WILL FIND THE ALPHA NUMERIC KEY TO THESE TABLES ON PAGES 114-115.





### A15A A15/15A A15/15A BBSL15A, BSL15A, BBSL15A, BBSL15	B15V2A BB15V2A NS NS NS NS NS NS NS NS NS N
YES	NS NS NS NS NS NS NS NS
YES	NS NS NS NS NS NS
YES	NS NS NS NS
YES	NS NS NS
YES	NS NS NS
YES	NS NS
YES	NS
NS12	
YES	N:0
Y1	NS
YES XES XES YES XES XES YES XES YES XES XES YES XES XES YES XES XES XES XES XES	NS
NS12	NS
NS12	N13
NS12	NS
Y1 Y1X2 Y1 Y1X4 Y1 Y1X2 Y1 Y1X2 Y1 Y1X4 Y1 Y1X2 Y1 Y1X2 Y1 Y1X4 Y1 Y1X2 YES X5 YES X5 YES X5	YES
YES X5 YES X5 YES X5	NS
YES X5 YES X5 YES X5	NS
YES X5 YES X5 YES X5	NS
YES X5 YES X5 YES X5 YES X5 YES X5 YES X5 YES X5 YES X5	NS
YES X5 YES X5 YES X5 YES X5 YES X5 YES X5	NS
YES X5 YES X5 YES X5	NS
	NS
NS12 NS12 NS12 NS12 NS12 NS12 NS12	NS
	X5
YES X5 YES X4 YES X5	NS
YES X5 YES X4 YES X5	NS
	NS
NS12 NS12 NS12 NS12 NS12 NS12	X5
YES X5 YES X4 YES X5	NS
YES X5 YES X4 YES X5	NS
YES X5 YES X4 YES X5	NS
NS12 NS12 NS12 NS12 NS12 NS12	X5
YES X5 YES X4 YES X5	NS
YES X5 YES X4 YES X5 YES X5 YES X4 YES X5 NS12 N	NS
NS12 NS12 NS12 NS12 NS12 NS12	X5
	NS
YES NS12 NS12 NS12 AS NS12 Y1 NS12 NS12 NS12 AS NS12 YES NS12 NS12 NS12 AS NS12 YES NS12 NS12 NS12 AS NS12	
YES NS12 NS12 AS NS12	NS

Please Note: Junction boxes are not suitable for Metal Plate range.

YOU WILL FIND THE ALPHA NUMERIC KEY TO THESE TABLES ON PAGES 114-115.

Quick Reference Guide - Alpha Numeric Key for Mounting Accessories

Code	Description
А	Not suitable; access card can't be inserted.
AS	Not suitable; the product can be mounted, however, it will not meet Australian Standards requirements.
CL	Cord line switch (is not mounted to anything).
IP1	Not suitable; as this will affect IP rating of the product.
N	Not suitable; the product can be mounted, however, there is some overhang so covers/surrounds can be easily removed.
N2	Not suitable; product base fouls the inner edge of the accessory, meaning that the mounting centres do not line up.
N3	Not suitable; product base fouls the accessory mounting bosses, meaning that the product can't be mounted flush.
N4	Not suitable; the product can be mounted, however, the required IP rating can no longer be met.
N5	Not suitable; large product base fouls the duct entries of the mounting accessory, meaning that the product can't be flush mounted.
N6	Not suitable; the product can be mounted, however, the 'press to test' and 'press to reset' buttons can't be pushed.
N7	Not suitable; product mounting bosses foul the inner edge of accessory, meaning the product does not fit.
N8	Not suitable; the finished result looks very unprofessional.
N9	Not suitable; the cover/surround does not fit into accessory.
N10	Not suitable; mounting centres line up, however, the product overhangs the accessory.
N11	Not suitable; cored angled recess of C2449ASD can be seen, giving an unprofessional look.
N12	Not suitable; the bosses attaching the mechanism back box to the flush plate protrude below the flush plate edge, meaning that the product can't be flush mounted.
N13	Not suitable; product base is too large to fit into the accessory.
NS1	Not suitable; can be direct mounted to surface (55mm mounting centres).
NS2	Not suitable; can be direct mounted to surface (70mm mounting centres).
NS3	Not suitable; can be direct mounted to surface (98mm mounting centres).
NS4	Not suitable; can be direct mounted to surface (123mm mounting centres).
NS5	Not suitable; can be direct mounted to surface (40mm mounting centres).
NS6	Not suitable; can be direct mounted to surface (60mm mounting centres).
NS7	Not suitable; can be direct mounted to surface (87mm mounting centres).
NS8	Not suitable; can be direct mounted to surface (78mm mounting centres).
NS9	Not suitable; can be direct mounted to surface (136mm mounting centres).
NS11	Not suitable; can be direct mounted to surface (50mm mounting centres).
NS12	Not suitable; can be direct mounted to surface (84mm mounting centres).
NS13	Not suitable; can be direct mounted to surface (75mm mounting centres).
NS14	Not suitable; can be direct mounted to surface (145mm mounting centres).
NS15	Not suitable; can be direct mounted to surface (104mm mounting centres).
NS16	Not suitable; can be direct mounted to surface (120mm mounting centres).
NS17	Not suitable; can be direct mounted to surface (230mm x 40mm mounting centres).
NS18	Not suitable; can be direct mounted to surface (153mm mounting centres).
NS20	Not suitable; can be direct mounted to surface (42mm mounting centres).
NS21	Not suitable; can be direct mounted to surface; must provide insulation on the back of product if mounting to a conductive surface (39mm mounting centres).
NS22	Not suitable; can be direct mounted to surface (35mm mounting centres).
NS23	Not suitable; can be direct mounted to surface (70mm x 70mm mounting centres).
NS24	Not suitable; can be direct mounted to surface (52mm mounting centres).
NS25	Not suitable; can be direct mounted to surface (66mm x 57mm mounting centres).
NS26	Not suitable; can be direct mounted to surface; used as a component part for air movement and heating products, however, if direct mounting product care should be taken with cable isolation (32mm x 34mm mounting centres).
NS27	Not suitable; can be direct mounted to surface (48mm mounting centres).
Т	Not suitable; the text on the top of the cover can't be seen.
UN	Unique wall box is supplied with the product.
X4	Yes; ensure mounting accessory is set back 12mm from outer wall surface.
X5	Yes; ensure mounting accessory is set back 25mm from outer wall surface.

Code	Description
S	Yes; the screws supplied with the product are not long enough to mount the product to the accessory.
Y1	Yes; allow 10mm depth for mechanism and cable protrusion.
Y1N	Yes; there is some overhang meaning that covers/surrounds can be easily removed. Allow 10mm depth for mechanism and cable protrusion.
Y1P	Yes; allow 10mm depth for mechanism and cable protrusion. Plastic side flange must be cut off for product to be mounted.
Y1R	Yes; however the product will require 3mm recess to be provided as it will 'bottom out' on the mounting surface.
Y1X2	Yes; ensure mounting accessory is set back 8mm from outer wall surface. Allow 10mm depth for mechanism and cable protrusion.
Y1X4	Yes; ensure mounting accessory is set back 12mm from outer wall surface. Allow 10mm depth for mechanism and cable protrusion.
Y1Y10	Yes; sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, in order to retain its IP rating. Allow 10mm depth for mechanism and cable protrusion.
Y1Y10N	Yes; sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, in order to retain its IP rating. Allow 10mm depth for mechanism and cable protrusion. There is also some product overhang, meaning covers/surrounds can be easily removed.
Y1Y11	Yes; sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, and the cored area mounting bosses in order to retain its IP rating. Allow 10mm depth for mechanism and cable protrusion.
Y2	Yes; allow 15mm depth for mechanism and cable protrusion.
Y2N	Yes; there is some overhang meaning, covers/surrounds can be easily removed. Allow 15mm depth for mechanism and cable protrusion.
Y2X2	Yes; ensure mounting accessory is set back 8mm from outer wall surface. Allow 15mm depth for mechanism and cable protrusion.
Y3	Yes; allow 20mm depth for mechanism and cable protrusion.
Y3N	Yes; there is some overhang meaning, covers/surrounds can be easily removed. Allow 20mm depth for mechanism and cable protrusion.
Y3X2	Yes; ensure mounting accessory is set back 8mm from outer wall surface. Allow 20mm depth for mechanism and cable protrusion.
Y3Y10	Yes; sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, in order to retain its IP rating. Allow 20mm depth for mechanism and cable protrusion.
Y4	Yes; allow 25mm depth for mechanism and cable protrusion.
Y4N	Yes; there is some overhang meaning, covers/surrounds can be easily removed. Allow 25mm depth for mechanism and cable protrusion.
Y5	Yes; allow 30mm depth for mechanism and cable protrusion.
Y5R	Yes; allow 40mm depth for mechanism and cable protrusion.
Y5N	Yes; there is some overhang meaning, covers/surrounds can be easily removed. Allow 30mm depth for mechanism and cable protrusion.
Y6	Yes; allow 45mm depth for mechanism and cable protrusion.
Y7	Yes; the conduilt plugs or conduit have to be shortened to accommodate the large base of product.
Y8	Yes; use as a 3-gang mount (cut out aperture to suit 3-gang product).
Y9	Yes; use as a 3-gang mount (cut out aperture to suit 3-gang product). Allow 30mm depth for mechanism and cable protrusion.
Y10	Yes; sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, in order to retain its IP rating.
Y10N	Yes: there is some overhang meaning that covers/surrounds can be easily removed. Sealant must be used around the mounting accessory (or around where the accessory is mounted to the wall), sealing the accessory to the wall, in order to retain its IP rating.
Y11	Yes; product must be fully sealed against the 2449ASD (much pressure must be applied) and the deep surround must be sealed against the wall in order for the product to retain its IP rating.
Y12	Yes; sealant must be used in the area around the mounting screws and the conduit/duct entries in order for the product to retain its IP rating.
Y12N	Yes: there is some overhang meaning that covers/surrounds can be easily removed. Sealant must be used in the area around the mounting screws and the conduit/duct entries in order to retain its IP rating.
YM	Yes; must be mounted on a Heritage Mounting Block.

Quick Reference Guide

Catalogue No.	Description	Length	Width	Depth	Mounting Centres	Page
A31VA	1 Gang Switch. 250V/10A, 1-way/2-way, stainless.	115mm	70mm	30mm	84mm apart	41
A15/15A	Single Switched Socket Outlet, 250V, 15A, stainless.	115mm	70mm	30mm	84mm apart	67
A15/15M	Single Switched Socket Outlet Mechanism, 250V, 15A.	96mm	70mm		84mm apart	67
A15/15NA	Single Switched Socket Outlet, 250V, 15A, neon.	115mm	70mm	30mm	84mm apart	67
A15A	Single Switched Socket Outlet, 250V, 10A, stainless.	115mm	70mm	30mm	84mm apart	67
A15M	Single Switched Socket Outlet Mechanism, 250V, 10A.	96mm	70mm		84mm apart	67
A15NA	Single Switched Socket Outlet, 250V, 10A, neon, stainless.	115mm	70mm	30mm	84mm apart	67
A15VA	Single Switched Socket Outlet, 250V, 10A, stainless.	115mm	70mm	30mm	84mm apart*	76
A15VM	Single Switched Socket Outlet Mechanism, 250V, 10A.	94mm	55mm	36mm	84mm apart	76
A15YA	Single Switched Socket Outlet, 250V, 10A, lockable flap on socket, stainless.	115mm	70mm	45mm	84mm apart	68
A25A	Twin Switched Socket Outlet, 250V, 10A, stainless.	130mm	86mm	28mm	84mm apart	71
A31VX	Blank Plate, standard size, stainless.	115mm	70mm	30mm	84mm apart	47
A32VA	2 Gang Switch. 250V/10A, 1-way/2-way, stainless.	115mm	70mm	30mm	84mm apart	41
A33VA	3 Gang Switch. 250V/10A, 1-way/2-way, stainless.	115mm	70mm	30mm	84mm apart	41
A34VA	4 Gang Switch. 250V/10A, 1-way/2-way, stainless.	115mm	70mm	30mm	84mm apart	41
BSL15LA	Single Switched Socket Outlet, 250V, 10A, round Earth, stainless.	130mm	85mm	30mm	84mm apart	69
B15M	Single Switched Socket Outlet Mechanism, 250V, 10A.	96mm	55mm		64mm apart	69
B15V2A	Twin Switched Socket Outlet, 250V, 10A, stainless.	115mm	115mm	35mm	84mm apart	78
B15VA	Single Switched Socket Outlet, 250V, 10A, stainless.	115mm	70mm	35mm	84mm apart*	77
B15VM	Single Switched Socket Outlet Mechanism, 250V, 10A.				84mm apart*	77
B31A	1-Gang Switch. 250V/10A, 1-way/2-way, architrave, stainless.	90mm	35mm	30mm	70mm apart	45
B32A	3-Gang Switch. 250V/10A, 1-way/2-way, architrave, stainless.	110mm	35mm	30mm	95mm apart	45
B33A	5-Gang Switch. 250V/10A, 1-way/2-way, architrave, stainless.	140mm	35mm	30mm	125mm apart	45
В727Н	Universal Shaver Outlet, 240V-110V, includes 727VHB wall box, stainless.	186mm	95mm	90mm*	L157 x W64mm (fascia)	75
BA15A	Single Switched Socket Outlet, 250V, 10A, brass.	115mm	70mm	30mm	84mm apart	68
BA25A	Twin Switched Socket Outlet, 250V, 10A, brass.	130mm	86mm	28mm	84mm apart	72
BA31VA	1-Gang Switch. 250V/10A, 1-way/2-way, brass.	115mm	70mm	30mm	84mm apart	41
BA31VX	Blank Plate, standard size, brass.	115mm	70mm	30mm	84mm apart	47
BA32VA	2-Gang Switch. 250V/10A, 1-way/2-way, brass.	115mm	70mm	30mm	84mm apart	41
BA33VA	3-Gang Switch. 250V/10A, 1-way/2-way, brass.	115mm	70mm	30mm	84mm apart	41
BA34VA	4-Gang Switch. 250V/10A, 1-way/2-way, brass.	115mm	70mm	30mm	84mm apart	41
BB15/15A	Single Switched Socket Outlet, 250V, 15A, brass.	115mm	70mm	30mm	84mm apart	70
BBSL15LA	Single Switched Socket Outlet, 250V, 10A, round Earth, brass.	130mm	85mm	30mm	84mm apart	70
BB15VA	Single Switched Socket Outlet, 250V, 10A, brass.	115mm	70mm	35mm	84mm apart*	77
BB31A	2-Gang Switch. 250V/10A, 1-way/2-way, architrave, brass.	90mm	35mm	30mm	70mm apart	45
BB32A	4-Gang Switch. 250V/10A, 1-way/2-way, architrave, brass.	110mm	35mm	30mm	95mm apart	45
BB33A	6-Gang Switch. 250V/10A, 1-way/2-way, architrave, brass.	140mm	35mm	30mm	125mm apart	45
BBSL15A	Single Switched Socket Outlet, 250V, 10A, brass.	130mm	85mm	28mm	84mm apart	70
BBSL15XA	Single Switched Socket Outlet, 250V, 10A, extra switch, brass.	130mm	85mm	28mm	84mm apart	70

Catalogue No.	Description	Length	Width	Depth	Mounting Centres	Page
BBSL25A	Twin Switched Socket Outlet, 250V, 10A, brass.	130mm	85mm	35mm	84mm apart	74
BBSL25XA	Twin Switched Socket Outlet, 250V, 10A, extra switch, brass.	130mm	85mm	35mm	84mm apart	74
BBSL31VA	1-Gang Switch. With over size fascia, brass.	130mm	85mm	30mm	84mm apart	43
BBSL32VA	2-Gang Switch. 250V/10A, 1-way/2-way, brass.	130mm	85mm	30mm	84mm apart	43
BBSL33VA	3-Gang Switch. 250V/10A, 1 way/2 way, brass.	130mm	85mm	30mm	84mm apart	43
BBSL34VA	4-Gang Switch. 250V/10A, 1-way/2-way, brass.	130mm	85mm	30mm	84mm apart	43
BBSL35VA	5-Gang Switch. 250V/10A, 1-way/2-way, brass.	130mm	85mm	30mm	84mm apart	43
BBSL36VA	6-Gang Switch. 250V/10A, 1-way/2-way, brass.	130mm	85mm	30mm	84mm apart	43
BSL15A	Single Switched Socket Outlet, 250V, 10A, stainless.	130mm	85mm	28mm	84mm apart	69
BSL15XA	Single Switched Socket Outlet with extra switch, 250V, 10A, stainless.	130mm	85mm	28mm	84mm apart	69
BSL25A	Twin Switched Socket Outlet, 250V, 10A, stainless.	130mm	85mm	35mm	84mm apart	73
BSL25XA	Twin Switched Socket Outlet, 250V, 10A, extra switch, stainless.	130mm	85mm	35mm	84mm apart	73
BSL31VA	1-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL31VH	1-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSL32VA	2-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL32VH	2-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSL33VA	3-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL33VH	3-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSL34VA	4-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL34VH	4-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSL35VA	5-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL35VH	5-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSL36VA	6-Gang Switch. 250V/10A, 1-way/2-way, stainless.	130mm	85mm	30mm	84mm apart	42
BSL36VH	6-Gang Switch. With over size fascia, stainless.	130mm	85mm	30mm	84mm apart	48
BSLS15A	Single Switched Socket Outlet, 250V, 10A, security version.	130mm	85mm	28mm	120 x 75mm	39
BSLS15XA	Single Switched Socket Outlet with extra switch, 250V, 10A, security.	130mm	85mm	28mm	120 x 75mm	39
BSLS25A	Twin Switched Socket Outlet, 250V, 10A, security version.	130mm	85mm	35mm	120 x 75mm	39
BSLS25XA	Twin Switched Socket Outlet with extra switch, 250V, 10A, security.	130mm	85mm	35mm	120 x 75mm	39
BSLS25RC	Twin Switched Socket Outlet with RCD, 250V, 10A, security.	130mm	85mm	35mm	120 x 75mm	39
BSLS31VH	1-Gang Switch. With over size fascia, security version.	130mm	85mm	30mm	120 x 75mm	38
BSLS31VX	Blank Flush Gridplate and oversize fascia, security version.	130mm	85mm	1.6mm	120 x 75mm	41
BSLS31VXR1	Blank Flush oversize fascia with single round aperture, security version.	130mm	85mm	1.6mm	120 x 75mm	37
BSLS31VXR2	Blank Flush oversize fascia with two round apertures, security version.	130mm	85mm	1.6mm	120 x 75mm	37
BSLS32VH	2-Gang Switch. With over size fascia, security version.	130mm	85mm	30mm	120 x 75mm	38
BSLS33VH	3-Gang Switch. With over size fascia, security version.	130mm	85mm	30mm	120 x 75mm	38
BSLS34VH	4-Gang Switch. With over size fascia, security version.	130mm	85mm	30mm	120 x 75mm	38
BSLS35VH	5-Gang Switch. With over size fascia, security version.	130mm	85mm	30mm	120 x 75mm	38
BSLS36VH	6 Gang Switch. With over size fascia, security version	130mm	85mm	30mm	120 x 75mm	38



For more information on Metal Plates and other Clipsal products, contact your local Clipsal and Schneider Electric Partner Business Representative, electrical wholesaler or visit clipsal.com

Schneider Electric (Australia) Pty. Ltd. 33-37 Port Wakefield Road, Gepps Cross, South Australia, 5094 Consumer Support Enquiries Phone: 1300 669 925 Website: clipsal.com/contactus

National Customer Care (trade only)

Phone: 1300 369 233

