

Outlet specs & info



Outlet option A

Standard puddle flange

To suit all substrate types



Outlet option A | standard puddle flange | All substrates

If this option is selected, a complete puddle flange kit will be supplied, including the puddle flange, square chrome outlet, and matching chrome grate as shown below.

80mm Leak Control Puddle Flange System designed for both concrete and timber substrates. The waste assembly sits directly on the shower base and integrates with the puddle flange provided within the kit.

Colour options:

Chrome


Black



Outlet option A | standard puddle flange | All substrates

Outlet option A


Standard puddle flange specs

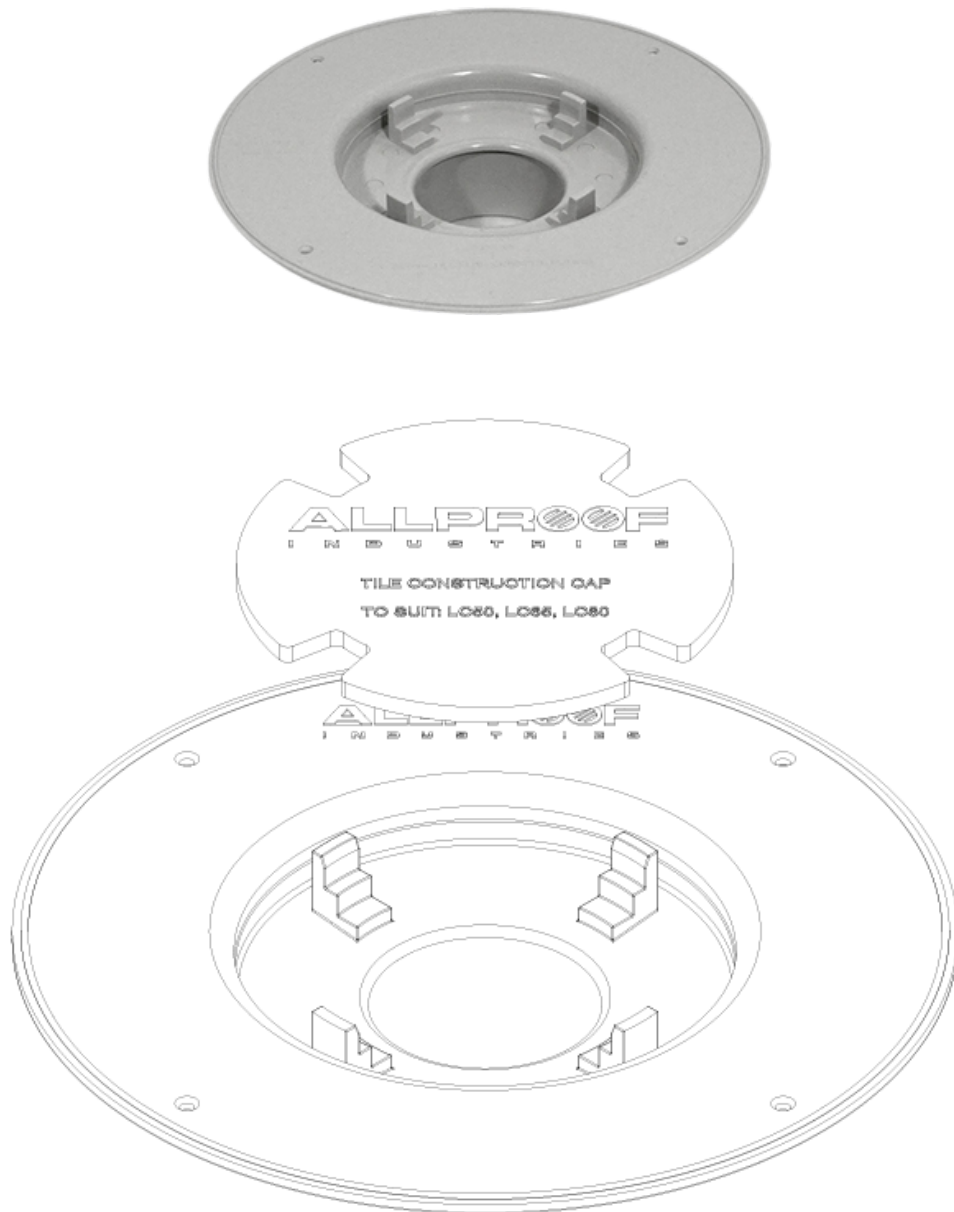

Outlet option A | standard puddle flange | All substrates

Outlet option A


Standard puddle flange specs

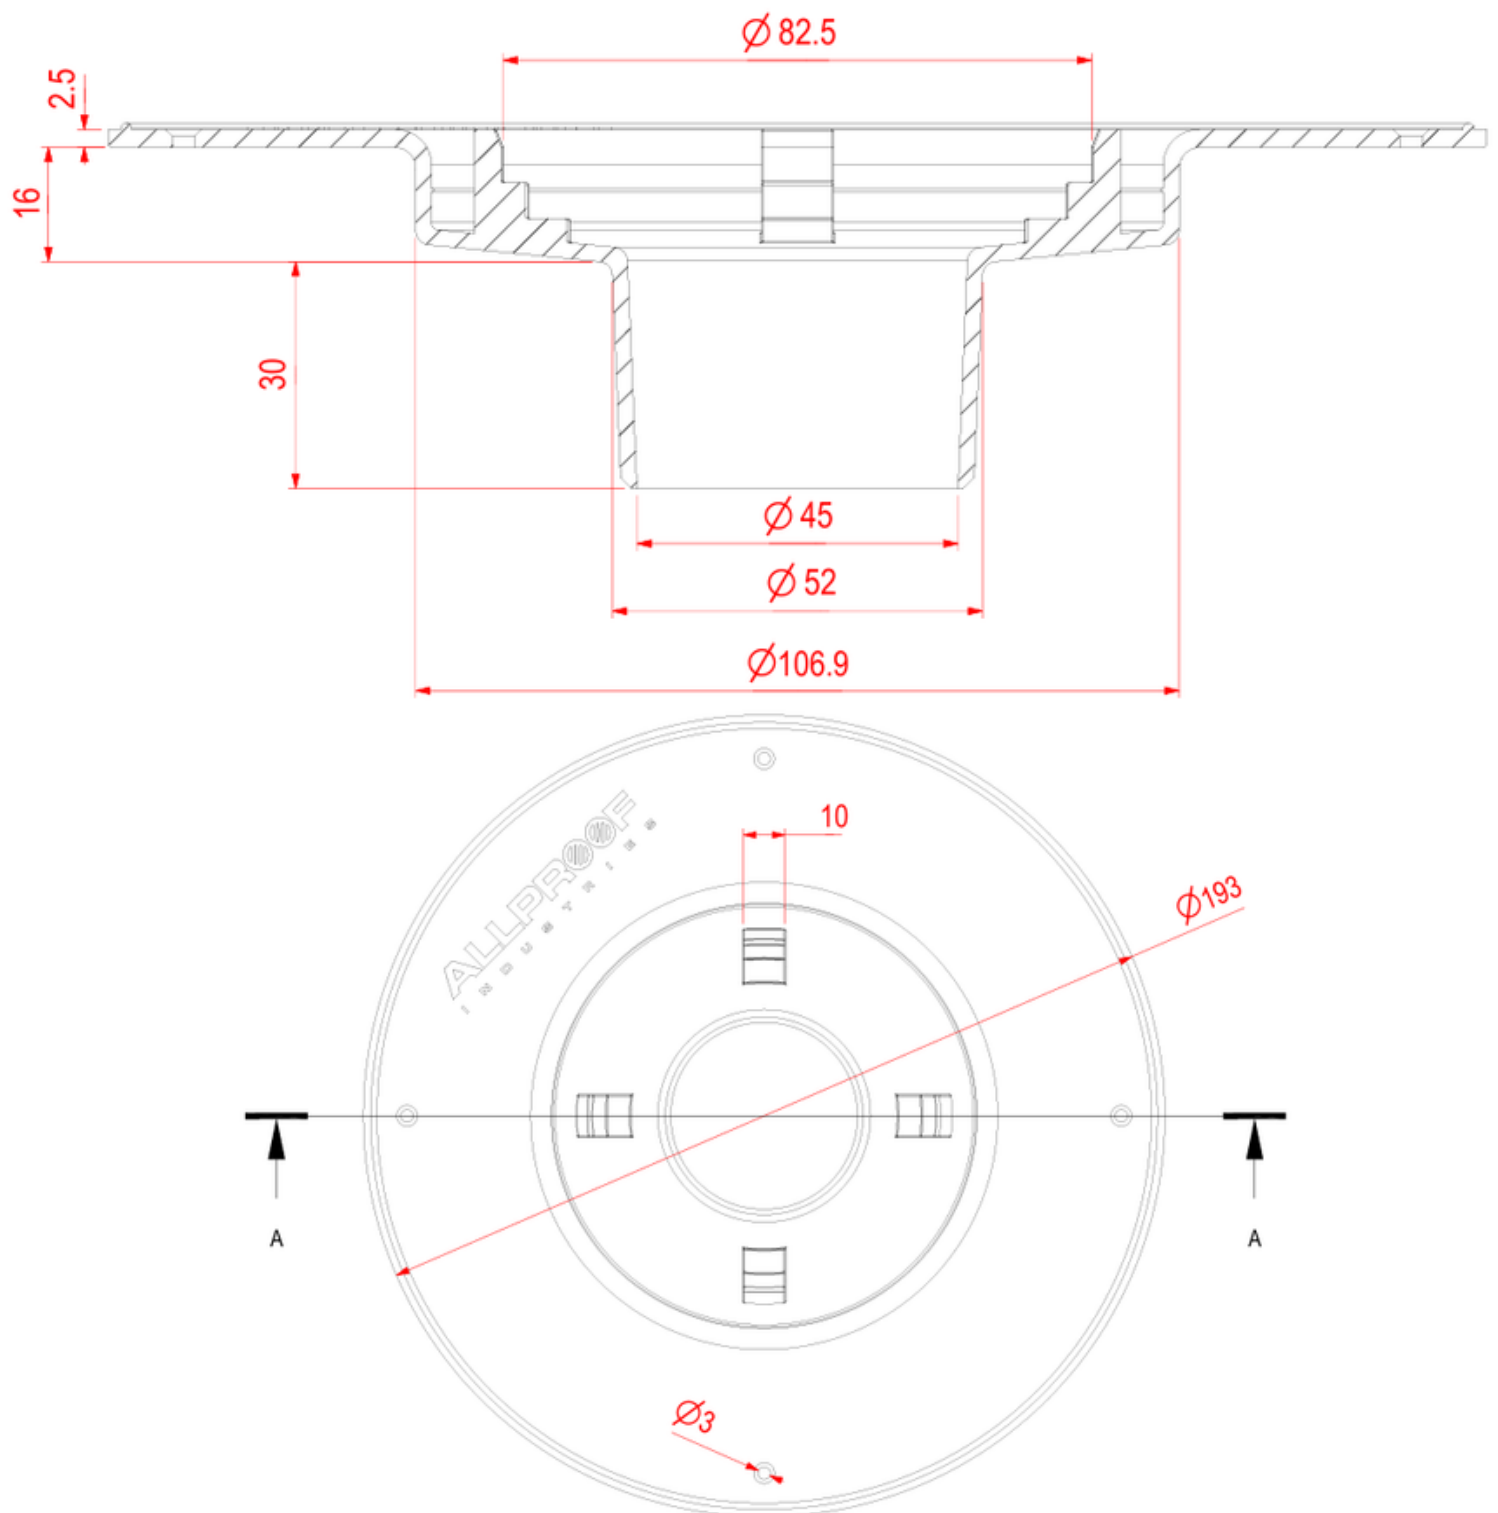

Outlet option A | standard puddle flange | All substrates

Outlet option A


Standard outlet specs

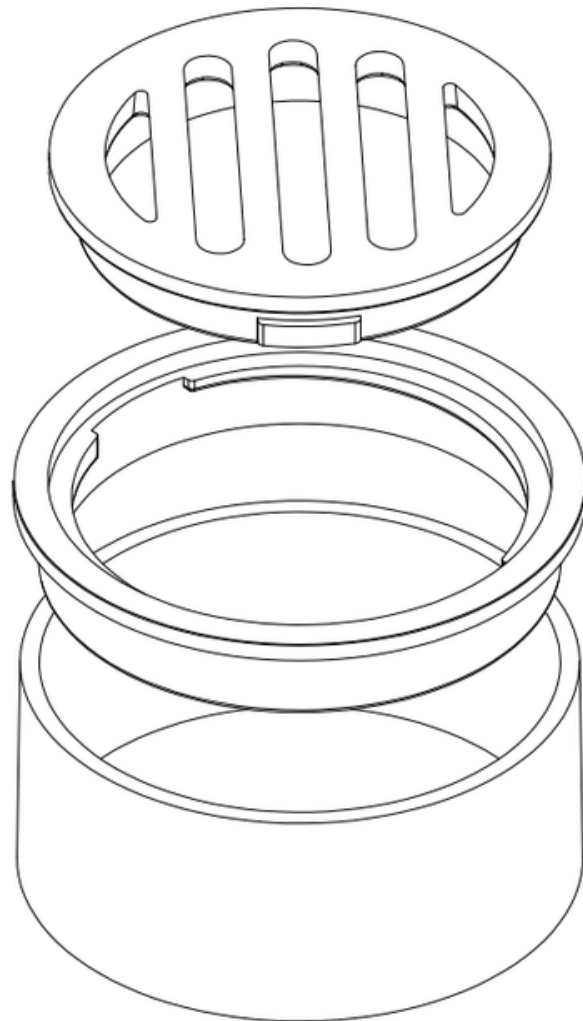

Outlet option A | standard outlet | All substrates

Outlet option A

Standard outlet specs

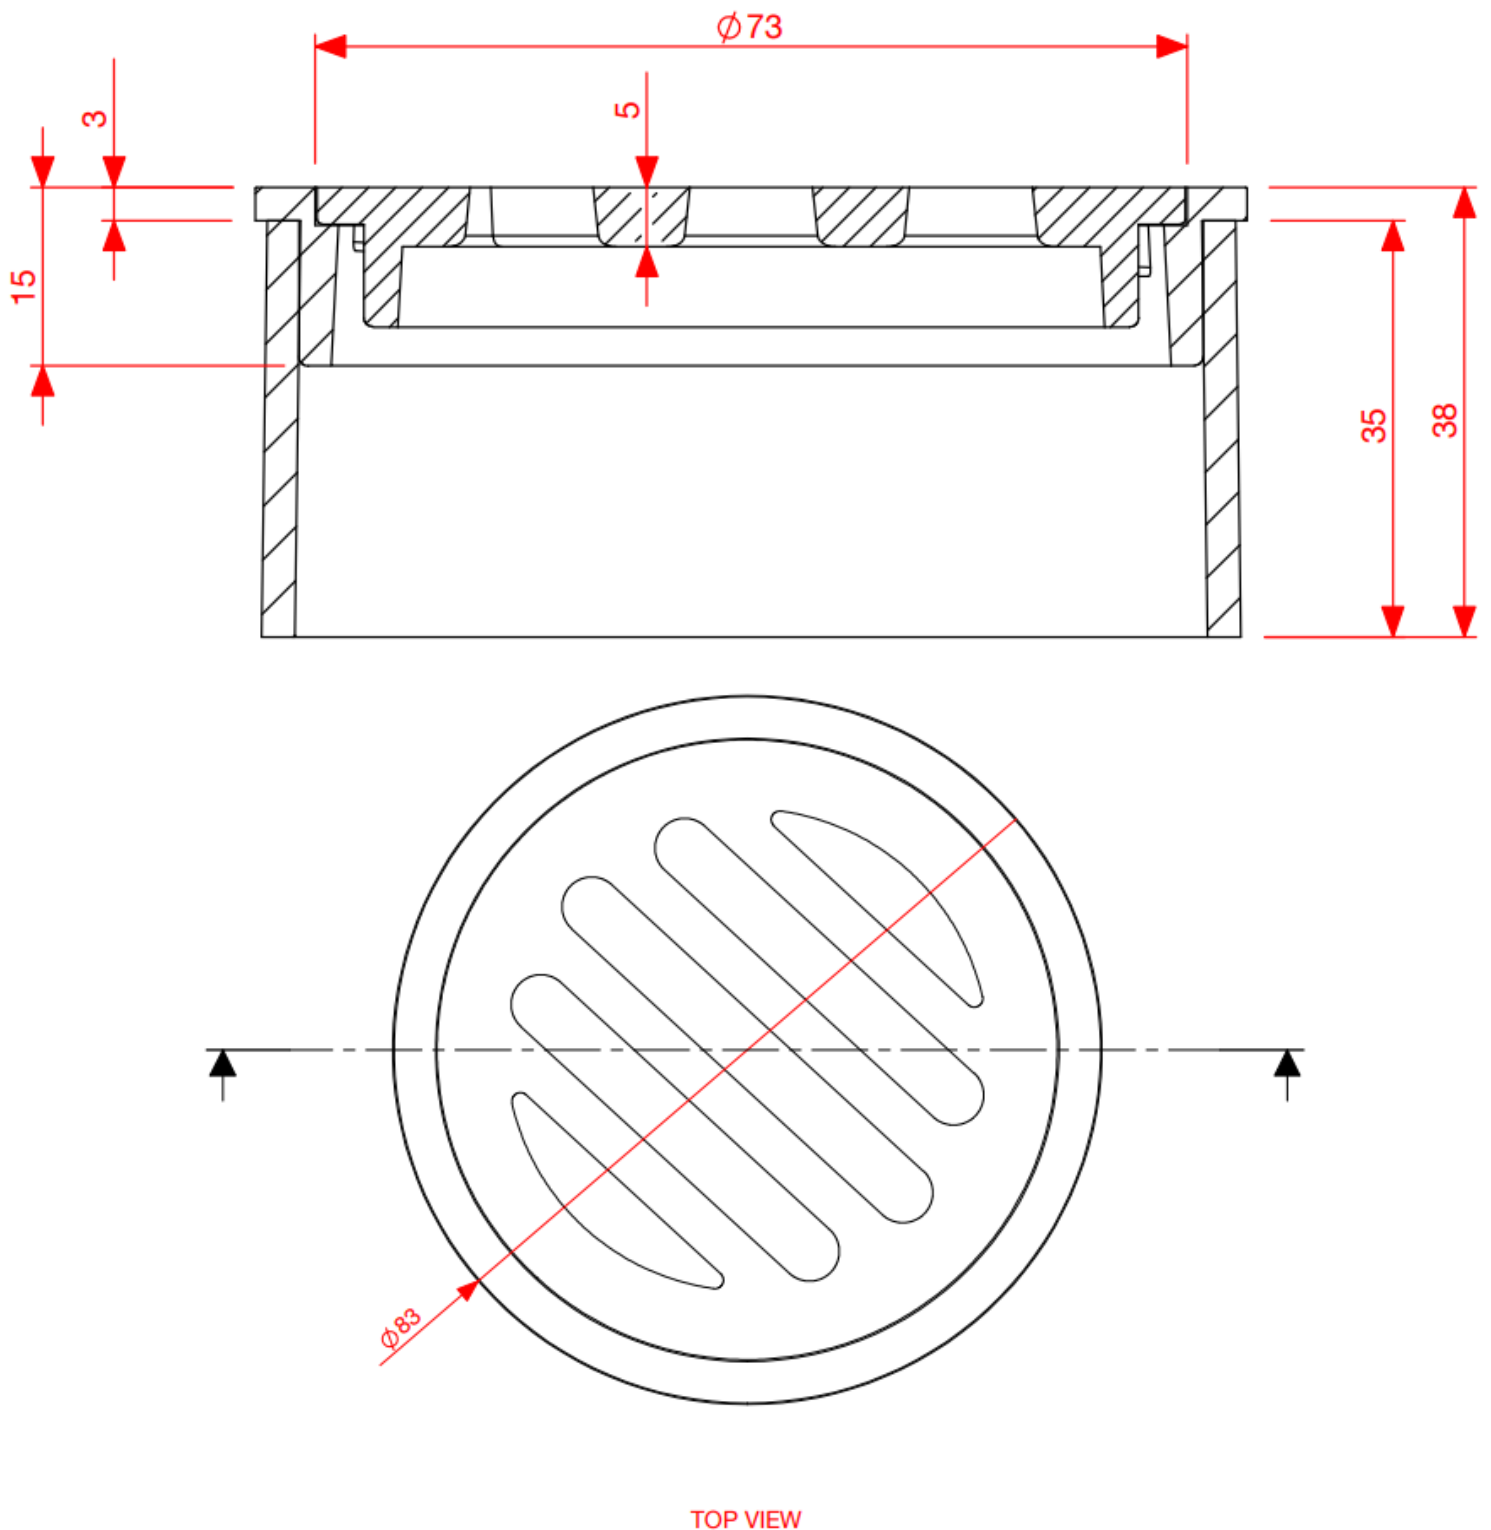


Outlet option A | standard outlet | All substrates

Outlet option A

Standard puddle flange

Concrete slab outlet specs

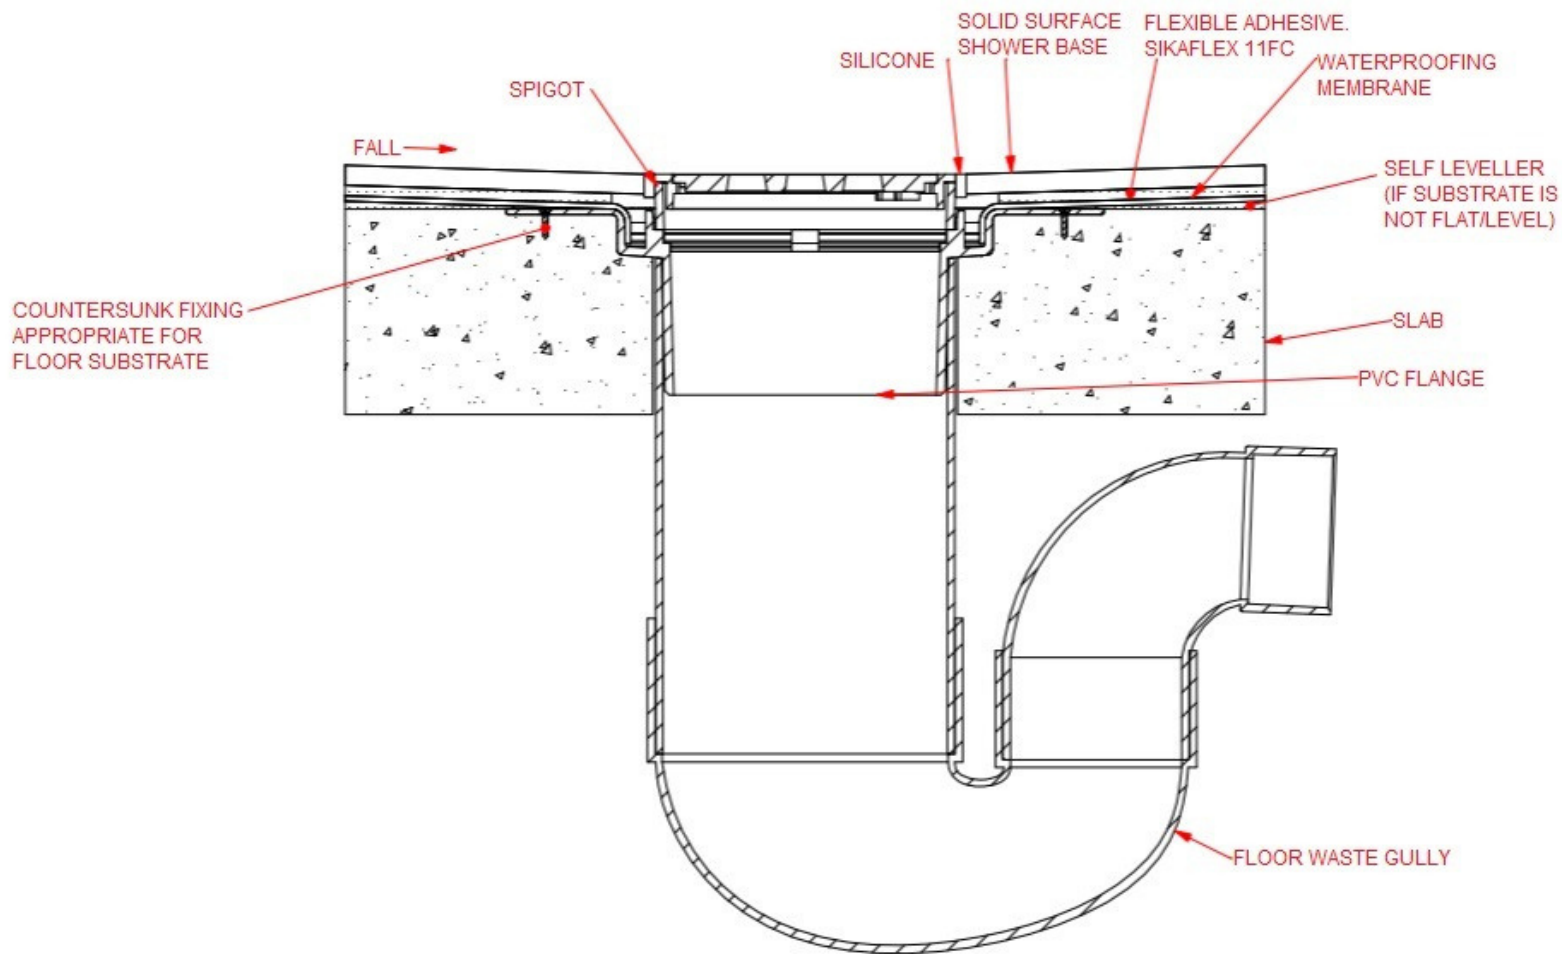

The puddle flange must be recessed flush within the concrete slab to ensure correct installation and finished floor alignment.


Please refer to the installation guide section: "Installation on Concrete Slab" for detailed instructions.

Outlet option A | standard outlet | Concrete substrates

Outlet option A

Standard puddle flange

Timber floor outlet specs

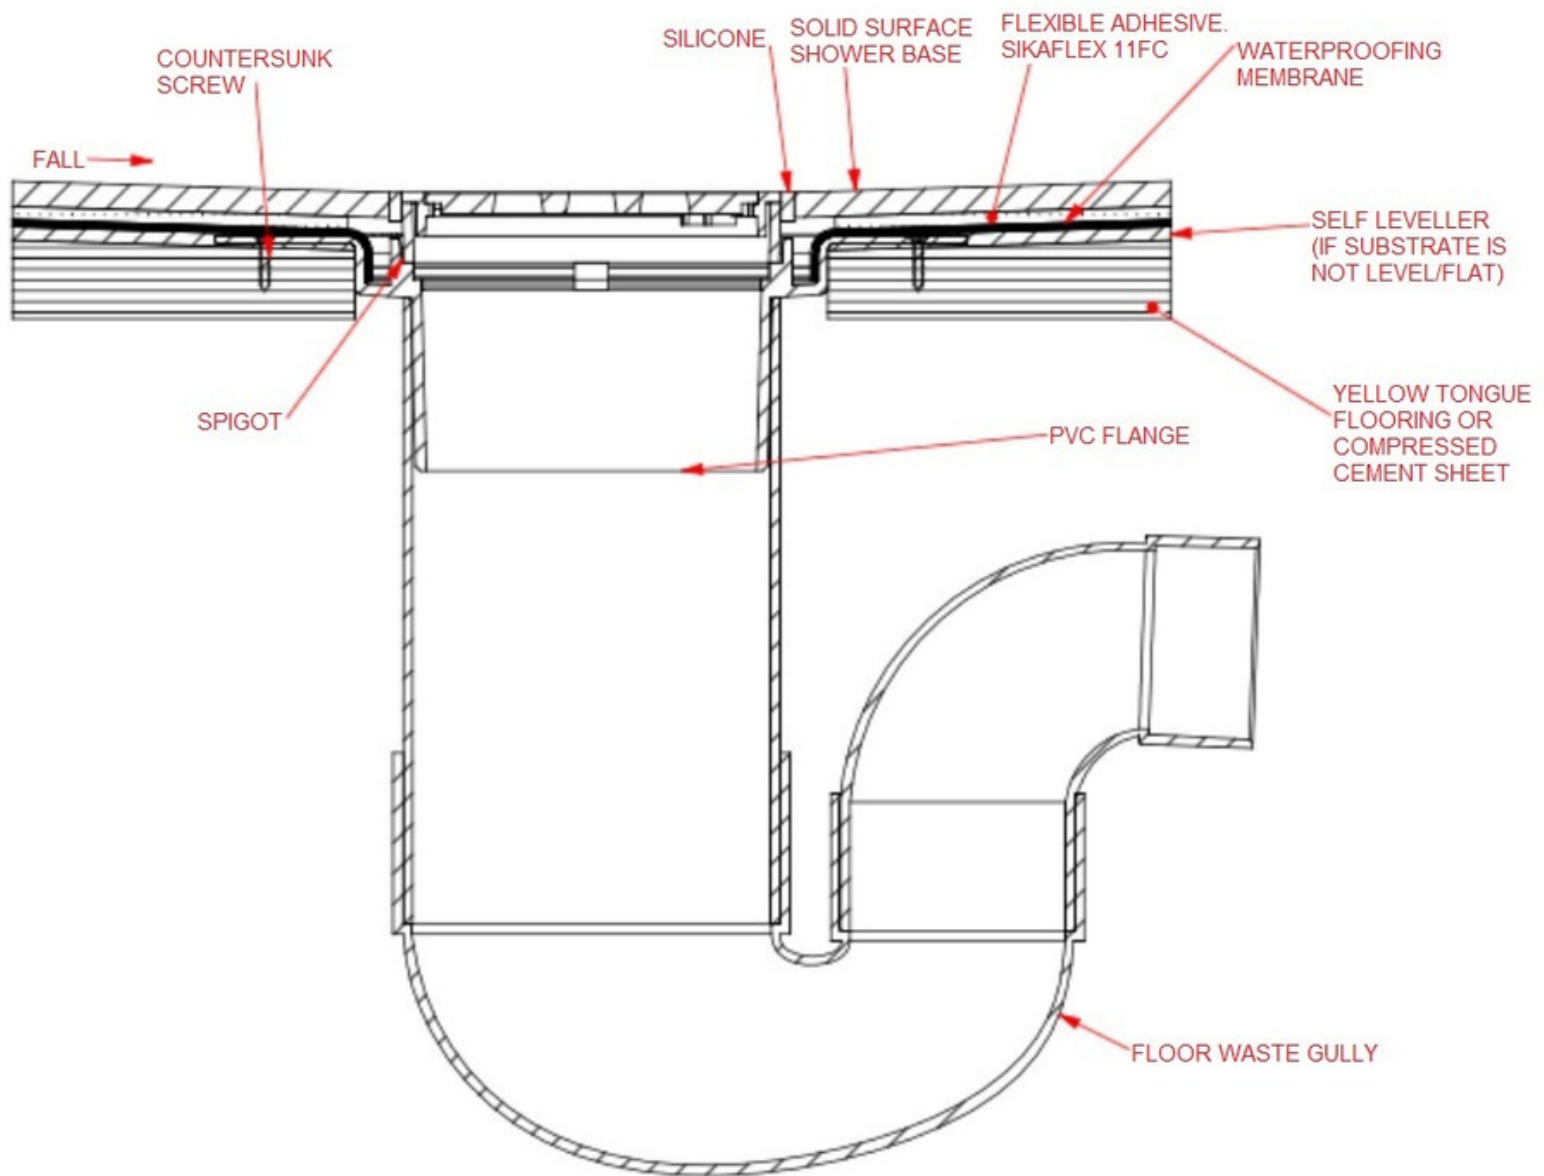

Please refer to the installation guide section: "Installation on Timber Substrates" for detailed installation requirements and procedures.

Outlet option A | standard outlet | Timber substrates

Outlet option B

Standard Shower Base Grate

Not suitable for concrete substrates without access underneath or use of a smart pan




Outlet option B | Standard Shower Base Grate | Timber substrates

Outlet option B

Standard Shower Base Grate

Not suitable for concrete substrates without access underneath or use of a smart pan

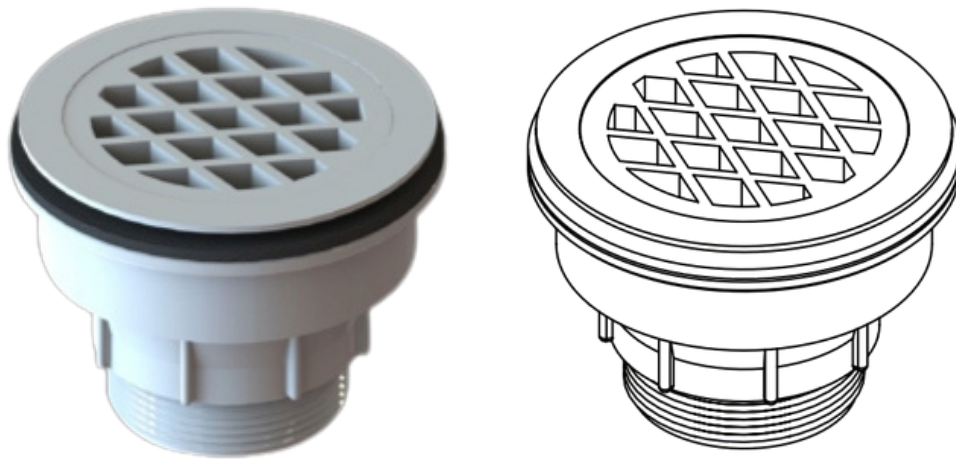

This outlet option is not recommended for concrete slab installations unless access is available from below, or a Smart Pan system is being utilised.

The 80x50mm SBW Diamond Grate features a threaded connection designed to pass through the shower base and securely connect directly to the waste assembly.

Please refer to the installation guide for detailed installation requirements and procedures.

Colour options:


White or Chrome

Outlet option B | Standard Shower Base Grate | Timber substrates

Outlet option B

Standard Shower Base Grate


Not suitable for concrete substrates without access underneath or use of a smart pan

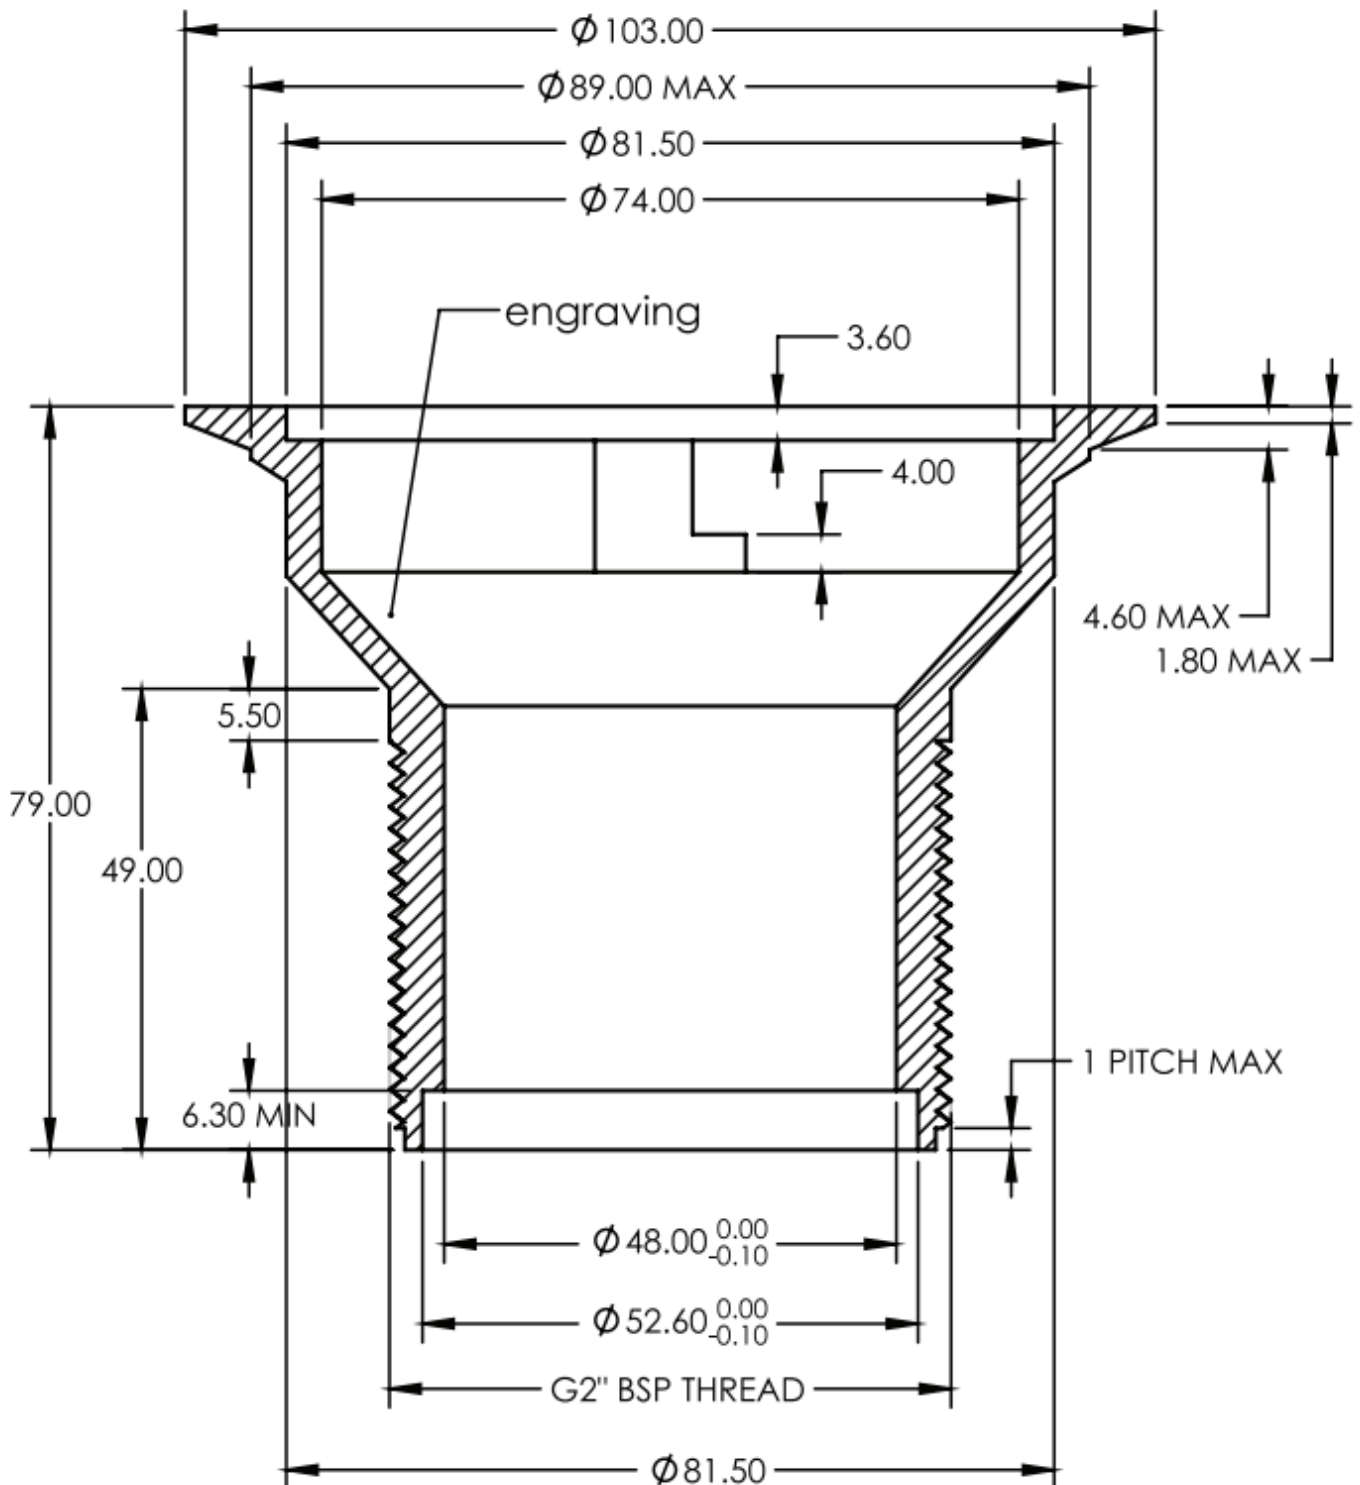

Outlet option B

Standard Shower Base Grate

Not suitable for concrete substrates without access underneath or use of a smart pan

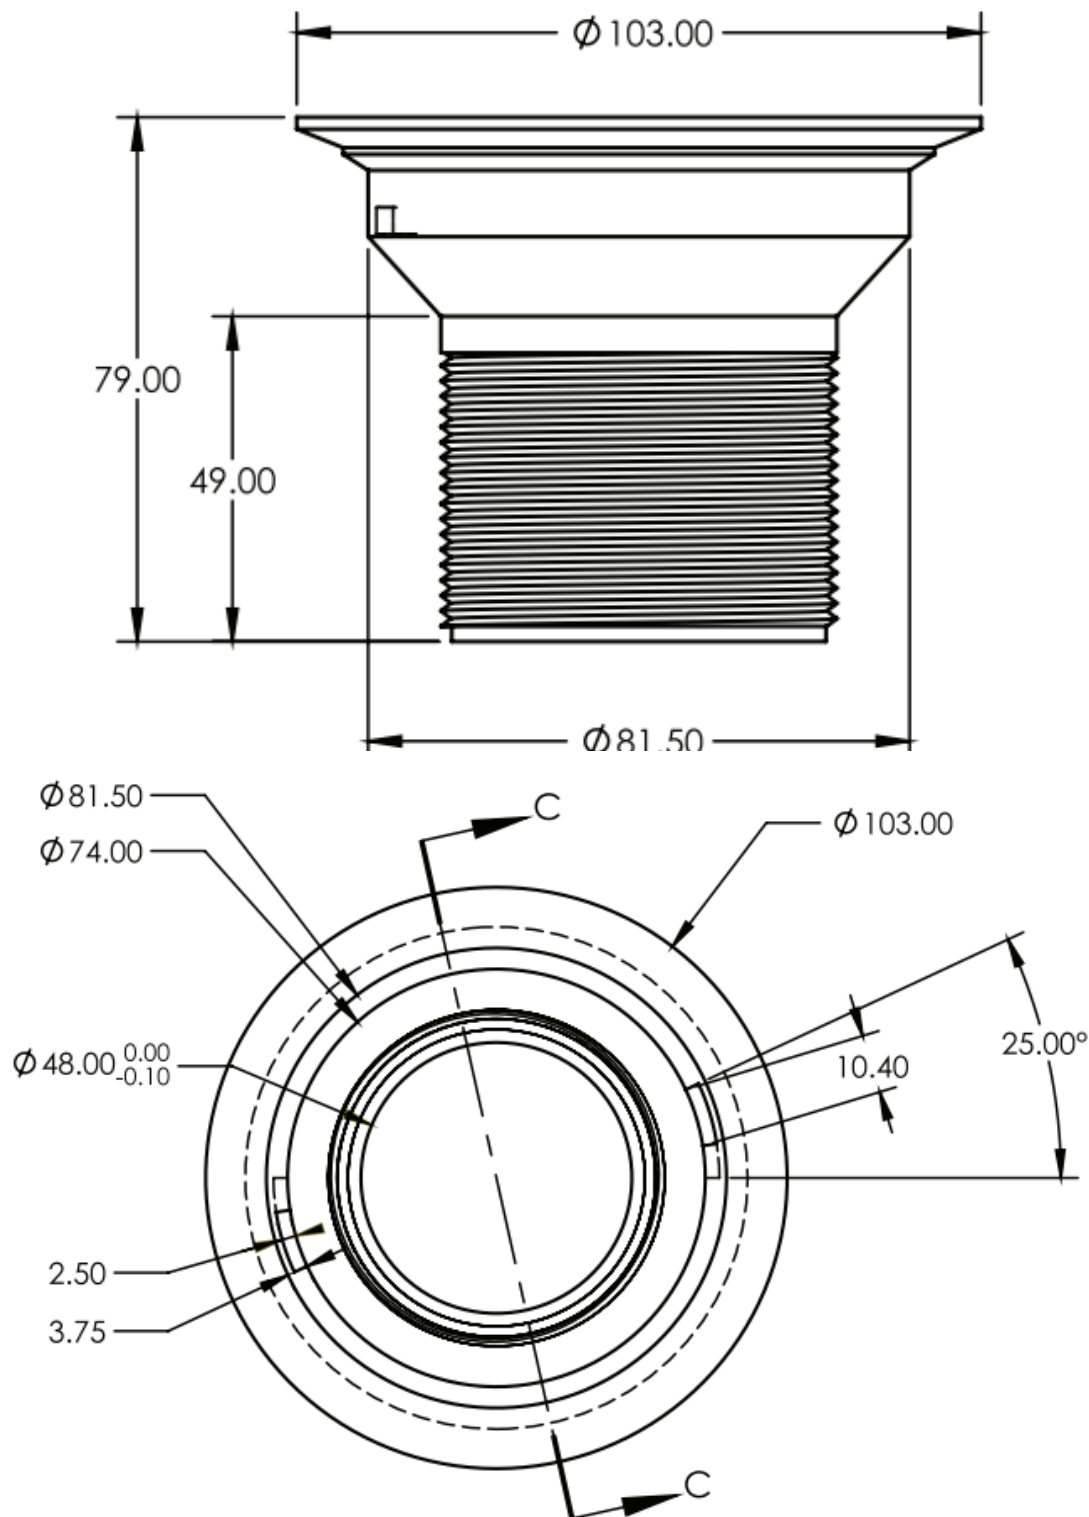


Outlet option C

Custom Flush Cap

Not suitable for concrete substrates without access underneath
or use of a smart pan



Outlet option C | Custom Flush Cap | Timber substrates

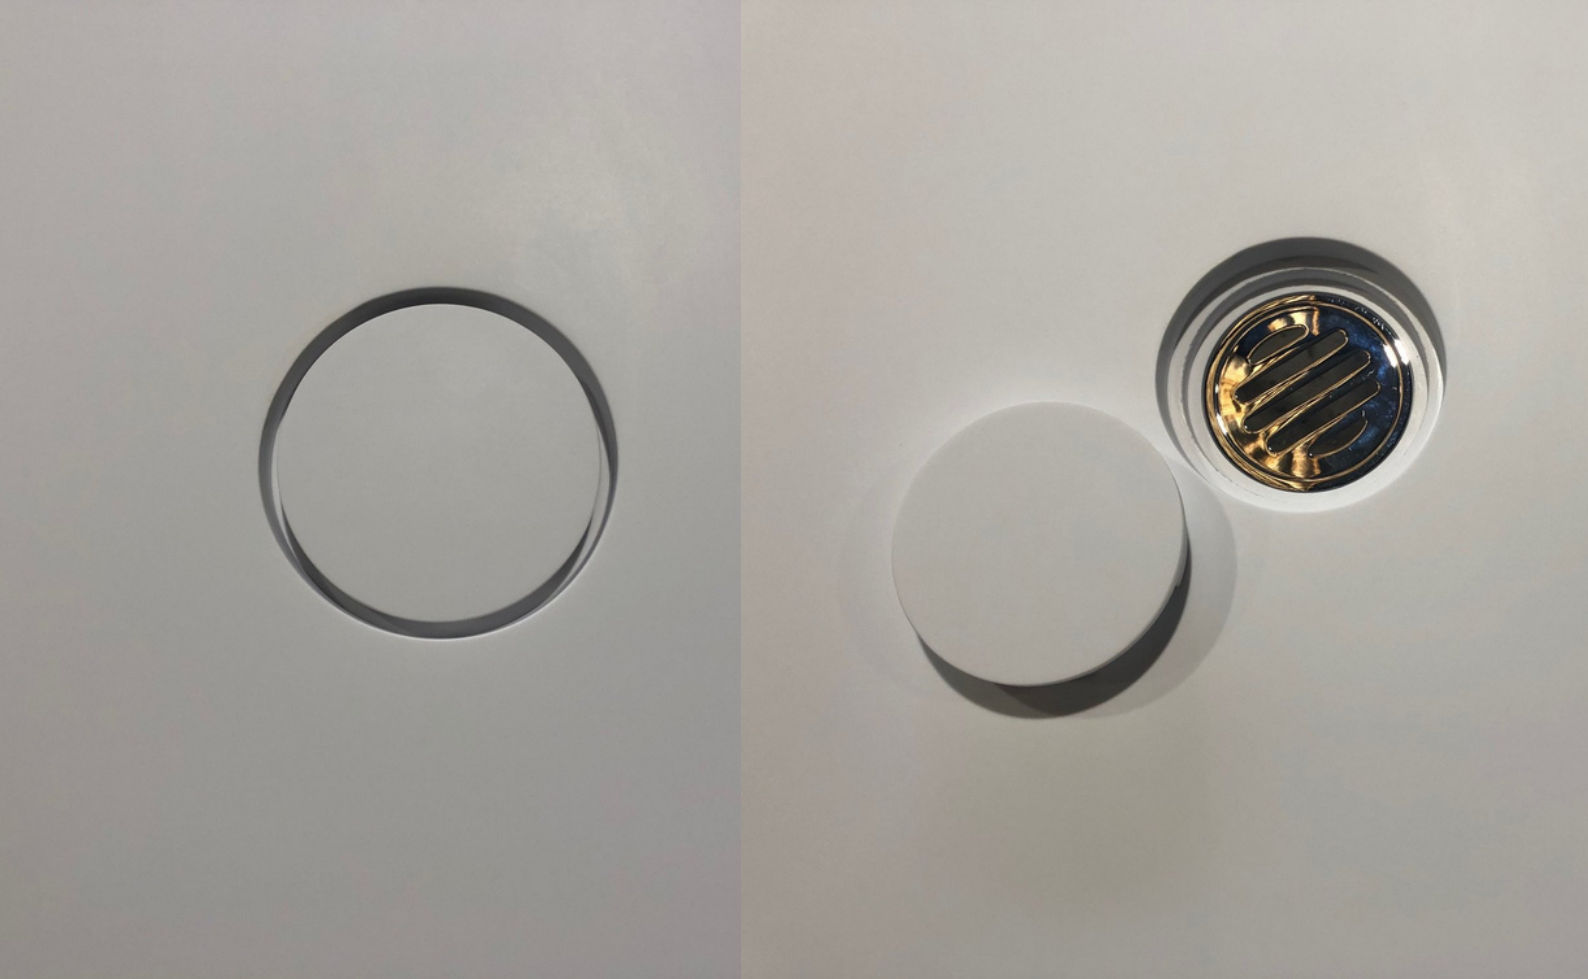

Solid Surface Flush Cap Finish

Available exclusively with the Option B Waste System.

The flush cap is manufactured from matching solid surface material to seamlessly integrate with your selected shower base colour and finish, creating a clean, minimalist appearance.

- 22mm thick solid surface flush cap
- 150mm diameter disc
- Timber floor installations require a 160mm–170mm diameter cut-out within the substrate
- For concrete substrates, installation must be completed over a Smart Pan system, with the lid providing support around the waste area

-

Please refer to the installation guide for detailed installation requirements and procedures.

Outlet option C | Custom Flush Cap | Timber substrates