


Under Timber Heating

COLD BUSTER floor heating




The ideal choice for heating below **engineered or natural timber floors, vinyls and laminates.**

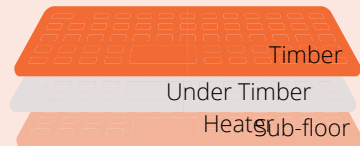

Our timber heaters are suitable for **installation on concrete, screed and suspended timber sub-floors** (with fibre cement sheeting over the timber).



The heaters, in combination with our smart programmable thermostats, **ensure heating efficiency and economical running costs.**




Under Timber heaters come in **11 standard lengths** with a twin conductor and a single 3m cold tail. Heaters can be combined in order to heat large areas.



Configuration

Coldbuster Under Timber Heaters are supplied as pre-configured strips on a self-adhesive fibreglass mesh roll. The protective fibreglass mesh over the element helps keep the element parallel during the leveller application. The heating element is taped to the 500mm wide mesh at a consistent spacing.

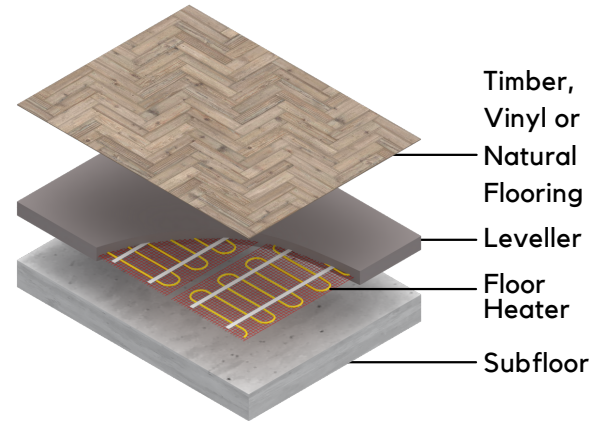


The high grade, waterproof, Teflon-coated heating element ensures both safety and durability. Coldbuster 'moderate output' heaters are ideally suited to vinyl, laminate, linoleum and engineered or natural timbers because the lower output (100W/m²) reduces risk of overheating. Heater temperature can also be limited to the maximum temperature limitation specified by the floor manufacturers by adjusting the thermostat setup.

Installation

Coldbuster recommends that the heater layout is planned prior to laying the heater. Following your heater layout plan, unroll the heater and stick it down into position using the adhesive tape on the mesh. A hot glue gun can be used to further secure the heater.

Cut the mesh and swing the heater in the direction of your next run. Repeat this process until the entire heater is laid.

Layout Example

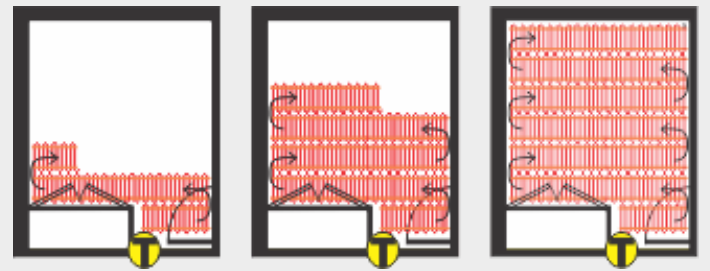

NEVER cut or cross over heater cables!

Specification

Product Code	Dimensions	Watts	Amps	Heater Size
TK100-0800	0.5 x 16.0m	832W	3.6A	8.0m ²
TK100-1000	0.5 x 20.0m	1080W	4.5A	10.0m ²
TK100-1200	0.5 x 24.0m	1296W	5.4A	12.0m ²
TK100-1350	0.5 x 27.0m	1458W	6.1A	13.5m ²
TK100-1500	0.5 x 30.0m	1620W	6.8A	15.0m ²
TK100-1650	0.5 x 33.0m	1782W	7.4A	16.5m ²
TK100-1800	0.5 x 36.0m	1944W	8.1A	18.0m ²
TK100-2000	0.5 x 40.0m	2160W	9.0A	20.0m ²
TK100-2250	0.5 x 45.0m	2430W	10.1A	22.5m ²
TK100-2500	0.5 x 50.0m	2700W	11.3A	25.0m ²
TK100-3000	0.5 x 60.0m	3240W	13.5A	30.0m ²

Heater kit includes:

- Under timber heater
- Installation monitor with battery
- Installation manual
- 20 year warranty



Head Office:

8/81 Frenchs Forest Rd E
Frenchs Forest NSW 2086

For Free Quote Australia-Wide:

Call: 1800 85 75 65
Email: sales@coldbuster.com.au

Find Us Online:

Website: www.coldbuster.com.au
LinkedIn: @coldbusterfloorheating
Facebook: @coldbusterfloorheating
Instagram: @coldbusterfloorheating