



Zero Touch Tapware

3monkeez[®]
innovate. create. deliver.

3monkeez[®]

www.3monkeez.com.au

sales@3monkeez.com.au

Commercial Tapware



GUARDIAN TAPWARE®

Zero Touch Range



3monkeez® new Sensor Range adds a hygienic finishing touch to every project. Leave behind germs, bacteria and viruses with tapware that use hands-free technology and infrared sensors to provide a reliable, contact-free solution. With sensor-operated Compact Bubblers, Bottle Fillers, and Bib and Pillar Taps, and flexible wall or hob mounted installation options, there is bound to be a hygienic hands-free option to suit your next project.

Constructed from 100% stainless steel these products also carry the Guardian Tapware® by 3monkeez® guarantee, offering not only attractive designs, but the strength, reliability and impressive water quality protection that can only be assured by stainless steel construction.



The Stainless Steel Advantage

Contents

Guardian Bib and Pillar Tap Range

Hob Mount Infrared Sensor Tap	4
Wall Mounted Infrared Sensor Tap	5
Pillar Tap with Hob Mount Sensor	6
Pillar Tap with Wall Mount Sensor	7
Bib Tap with Hob Mount Sensor	8
Bib Tap with Wall Mount Sensor	9

Bubblers and Bottle Fillers

45 Degree Metal Mouthguard Bubbler with Hob Mount Sensor	10
45 Degree Metal Mouthguard Bubbler with Wall Mount Sensor	11
45 Degree Silicone Mouthguard Bubbler with Hob Mount Sensor	12
45 Degree Silicone Mouthguard Bubbler with Wall Mount Sensor	13
Wall Mount Silicone Mouthguard Bubbler with Hob Mount Sensor	14
Wall Mount Silicone Mouthguard Bubbler with Wall Mount Sensor	15
Timed Sensor Compact Bubbler	16
Wall Mount Bottle Filler with Hob Mount Sensor	17
Wall Mount Bottle Filler with Wall Mount Sensor	18
Hob Mount Sensor Bottle Filler	19
Timed 6 Second Sensor Conversion Kit with Hob Mount Sensor	20
Timed 6 Second Sensor Conversion Kit with Wall Mount Sensor	21

Sensor Tapware Spare Parts

22

Commercial Tapware



GUARDIAN[®] TAPWARE



Hob Mount Infrared Sensor Tap



- T-3MSS-HMSTB
- T-3MSS-HMSTB-TV
- T-3MSS-HMSTM
- T-3MSS-HMSTM-TV


Available in mains or battery powered, with optional tempering valve

- Battery powered – 2x CR123 3V Lithium Batteries
- Mains powered – 6V transformer
- Full stainless steel construction
- Sensor range nominal: 50mm – 200mm
- Maximum run time: 60 seconds
- WELS 6 Star 4LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees




240v Power supply


Solenoid Unit

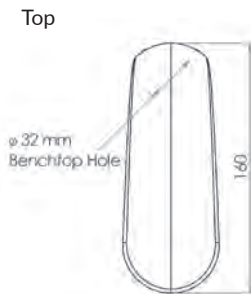

Top

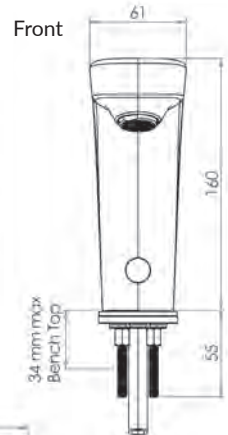

Front

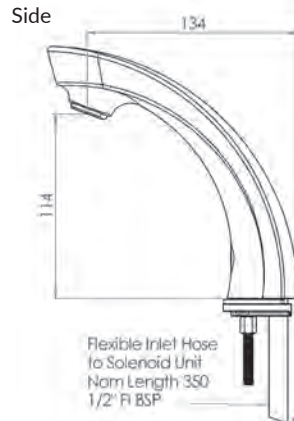

Side

Flexible Inlet Hose to Solenoid Unit
Nom Length 350
1/2" R BSP



T-3MSSP-HMST-M

T-3MSSP-HMST-CBS

T-3MSSP-HMSTB2



T-3MSSP-HMST-3M

* Power Supply with 3 metre lead available separately

Wall Mounted Infrared Sensor Tap



T-3MSS-WMSTB


- Battery operated
- Infrared sensor
- 1/2" FI BSP
- Full stainless steel construction
- WELS 6 Star 3.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 50 degrees
- All in one, no external parts




Front



Side

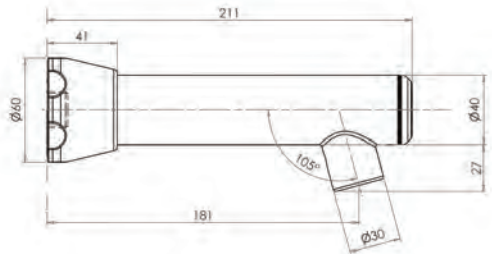

Bottom

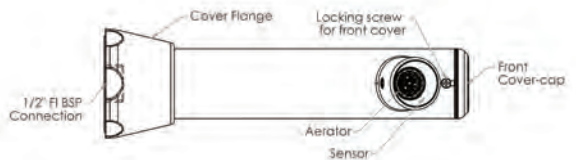

Pillar Tap with Hob Mount Sensor




T-3MSS-PTSB (Battery operated)


T-3MSS-PTSM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" MI BSP Inlet
- WELS 6 Star 3LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 60 degrees


Side

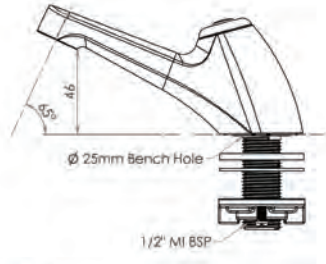


Top

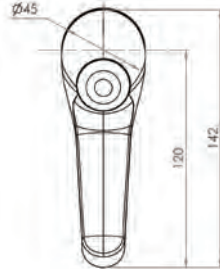

Front

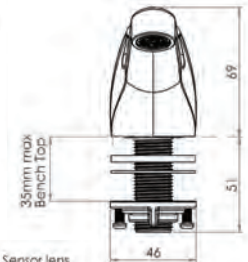

Ø44



Sensor lens Ø16



Commercial Tapware



GUARDIAN[®] TAPWARE

Pillar Tap with Wall Mount Sensor




T-3MSS-PTSWB (Battery operated)


T-3MSS-PTSWM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" MI BSP Inlet
- WELS 6 Star 3LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 60 degrees



Side

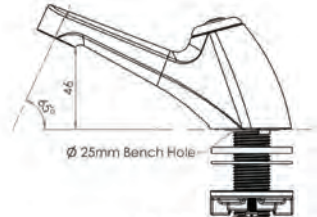

Top

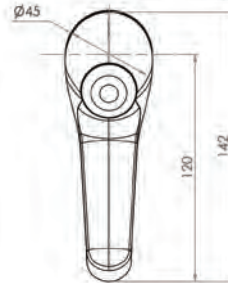

Front

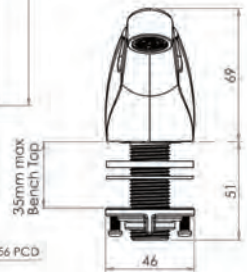

Mounting Body



Bib Tap with Hob Mount Sensor





T-3MSS-BTSB (Battery operated)


T-3MSS-BTSM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" MI BSP
- 1/2" FI BSP extension piece included
- WELS 6 Star 3LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 60 degrees

Side

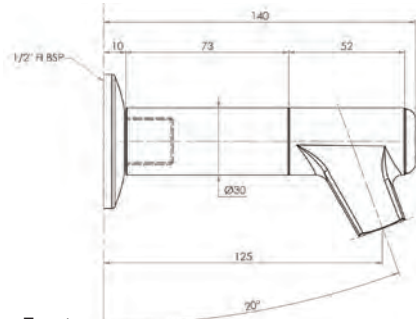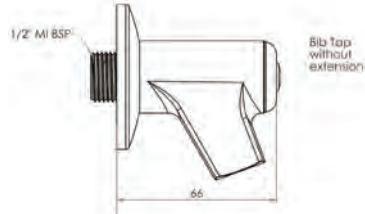

Front

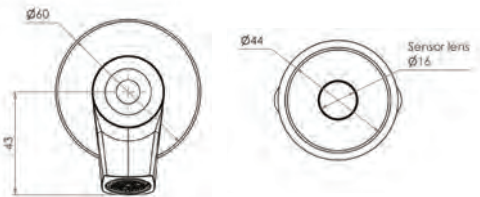

Commercial Tapware



GUARDIAN[®] TAPWARE

Bib Tap with Wall Mount Sensor





T-3MSS-BTSWB (Battery operated)


T-3MSS-BTSWM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" MI BSP
- 1/2" FI BSP extension piece included
- WELS 6 Star 3LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 60 degrees

Side

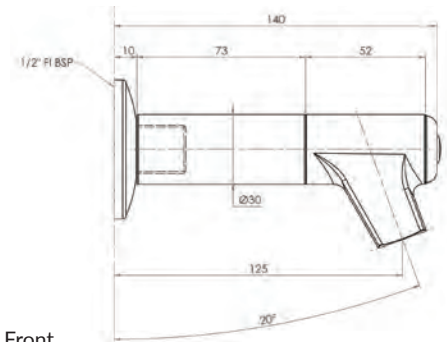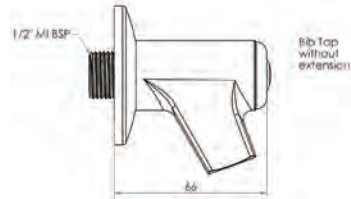

Front

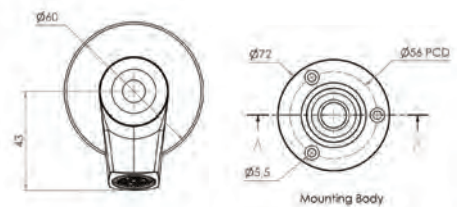


45 Degree Metal Mouthguard Bubbler with Hob Mount Sensor



T-3MSS-BUB45SB (Battery operated)

T-3MSS-BUB45SM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- Ideally suited for use with 3monkeez PT-7 troughs
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees

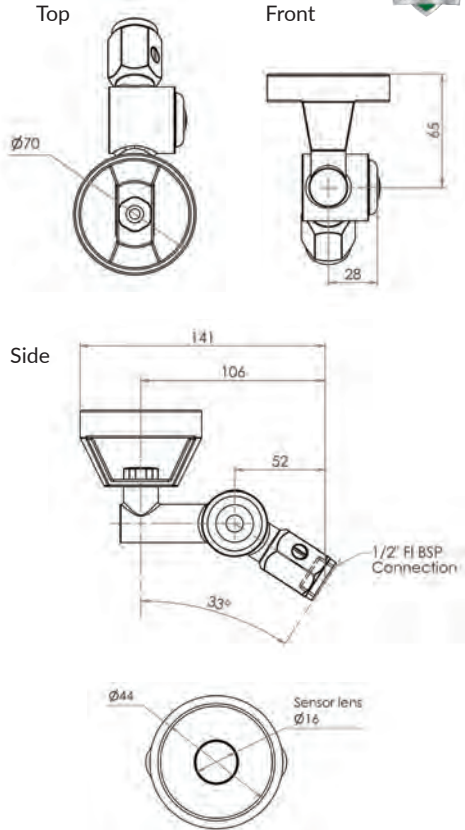

Commercial Tapware



GUARDIAN[®] TAPWARE

45 Degree Metal Mouthguard Bubbler with Wall Mount Sensor




T-3MSS-BUB45SWB (Battery operated)


T-3MSS-BUB45SWM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees




Top

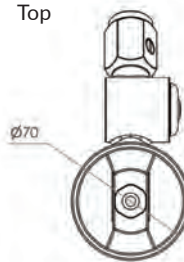

Front



Side

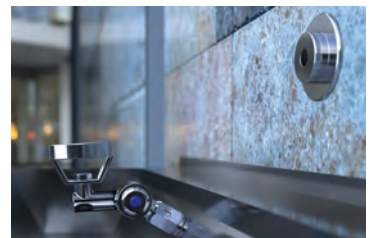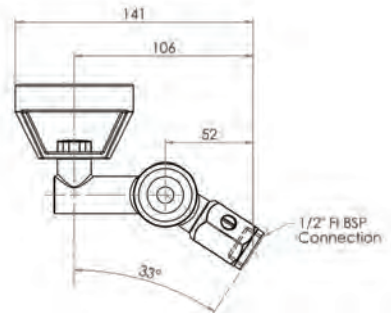

45 Degree Silicone Mouthguard Bubbler with Hob Mount Sensor




T-3MSS-BUBS45SB (Battery operated)


T-3MSS-BUBS45SM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- Ideally suited for use with 3monkeez PT-7 troughs
- Unique rubber mouthguard that protects teeth
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees



Top

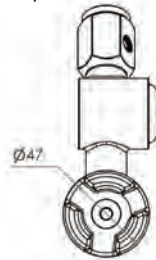

Front

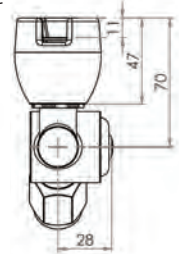

Side

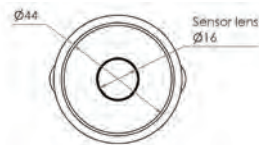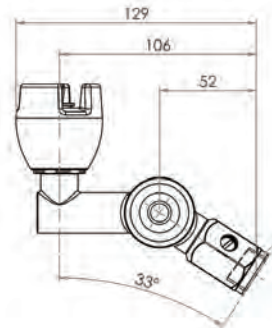

45 Degree Silicone Mouthguard Bubbler with Wall Mount Sensor




T-3MSS-BUBS45SWB (Battery operated)


T-3MSS-BUBS45SWM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- Ideally suited for use with 3monkeez PT-7 troughs
- Unique rubber mouthguard that protects teeth
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees



Top

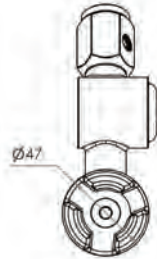

Front



Side

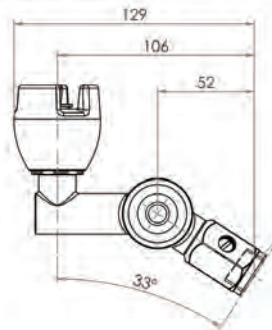

Wall Mount Silicone Mouthguard Bubbler with Hob Mount Sensor




T-3MSS-BUB90SB (Battery operated)


T-3MSS-BUB90SM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- Unique rubber mouthguard that protects teeth
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees



Top

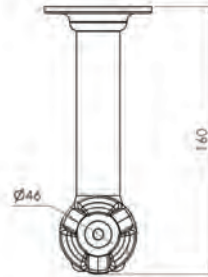

Front



Side

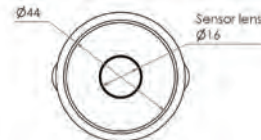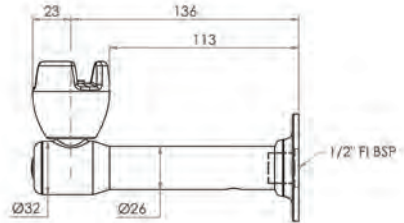

Wall Mount Silicone Mouthguard Bubbler with Wall Mount Sensor




T-3MSS-BUB90SWB (Battery operated)

T-3MSS-BUB90SWM (Mains operated)



- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- Unique rubber mouthguard that protects teeth
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees

Top

Front

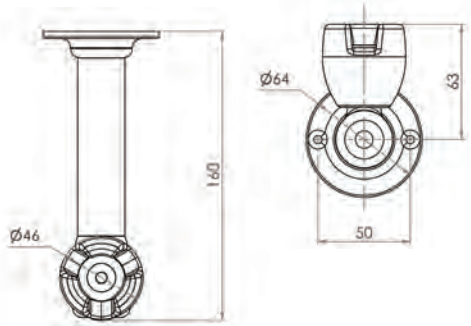

Side

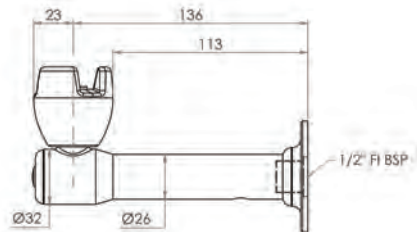

Timed Sensor Compact Bubbler




T-3MSS-BUBCSB (Battery operated)

T-3MSS-BUBCSM (Mains operated)


- Infrared 6 sec timed sensor
- Includes flexi hose – ½" FI BSP
- Full stainless steel construction
- WELS 6 Star 2.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees




Side

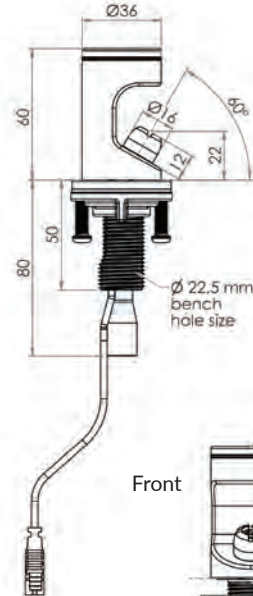

Top



Front

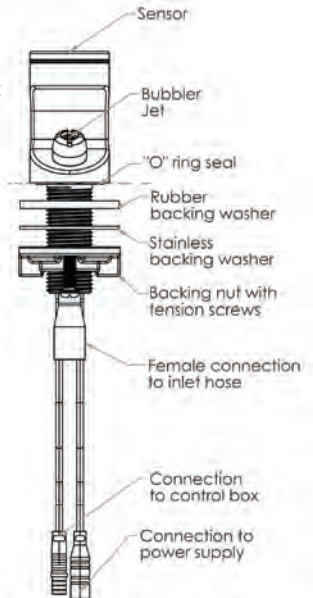

Wall Mount Bottle Filler with Hob Mount Sensor




T-3MSS-BFSB (Battery operated)


T-3MSS-BFSM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is hob mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees



Top

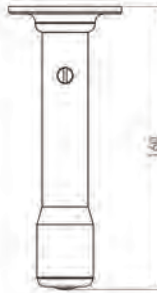

Front



Side

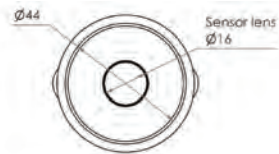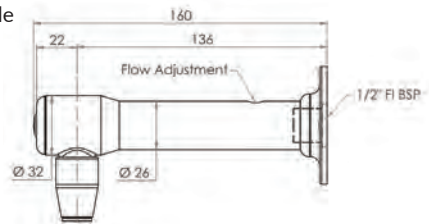


Wall Mount Bottle Filler with Wall Mount Sensor



T-3MSS-BFSWB (Battery operated)

T-3MSS-BFSWM (Mains operated)

- Infrared 6 sec timed sensor
- Full stainless steel construction
- Equipped with 3monkeez sensor technology for hands-free operation
- Sensor is wall mounted
- Available as battery powered or mains operated
- 1/2" FI BSP Inlet
- WELS 6 Star 1.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees

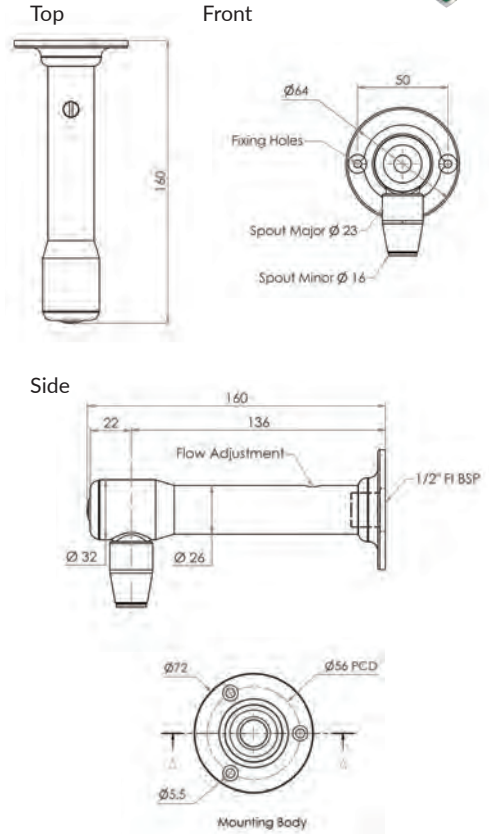

Commercial Tapware



GUARDIAN[®] TAPWARE

Hob Mount Sensor Bottle Filler




T-3MSS-HMSBFB (Battery operated)


T-3MSS-HMSBFM (Mains operated)

- Battery operated or mains powered
- Infrared sensor
- Spout locks into 8 different positions
- Includes flexi hose - 1/2" FI BSP
- Full stainless steel construction
- WELS 6 Star 2.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 70 degrees

Side

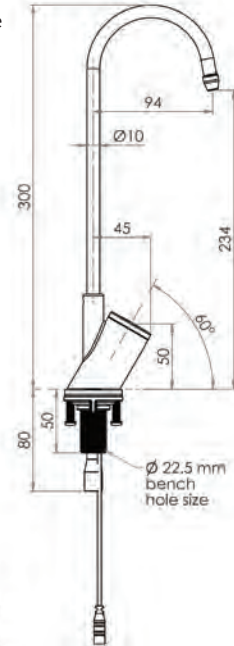

Front

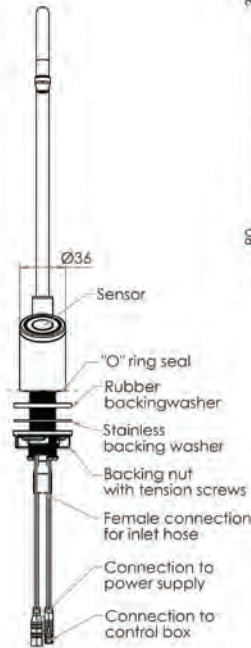

Accessories & Spare Parts



GUARDIAN[®] TAPWARE




Timed 6 Second Sensor Conversion Kit with Hob Mount Sensor



T-3MSSP-SCK-B (Battery operated)

T-3MSSP-SCK-M (Mains operated)

- Infrared 6 sec timed sensor
- Timed 6 Second Sensor Conversion Kit for 3monkeez Bib Taps, Pillar Taps, Standard Bubblers and Bottle Filler.
- Kit Includes Hob Mount Sensor, Solenoid with Case, Tap Control Cap, Battery Pack or Transformer

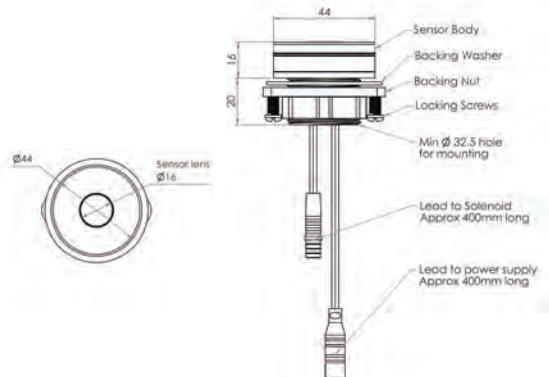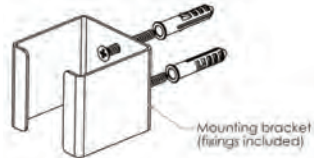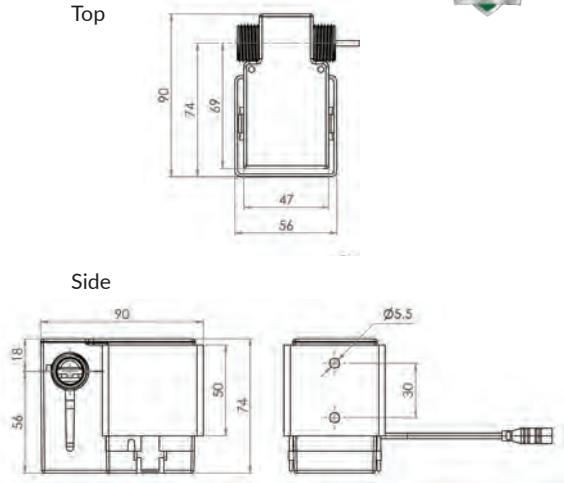

Accessories & Spare Parts



GUARDIAN[®] TAPWARE

Timed 6 Second Sensor Conversion Kit with Wall Mount Sensor




T-3MSSP-SWCK-B (Battery operated)

T-3MSSP-SWCK-M (Mains operated)




- Infrared 6 sec timed sensor
- Timed 6 Second Sensor Conversion Kit for 3monkeez Bib Taps, Pillar Taps, Standard Bubblers and Bottle Filler.
- Kit Includes Wall Mount Sensor, Solenoid with Case, Tap Control Cap, Battery Pack or Transformer



Top



Side

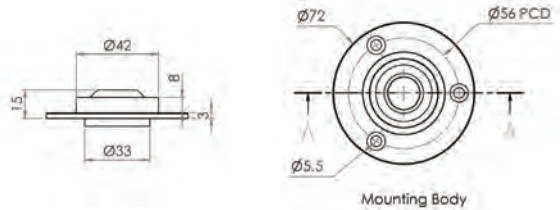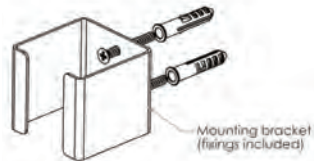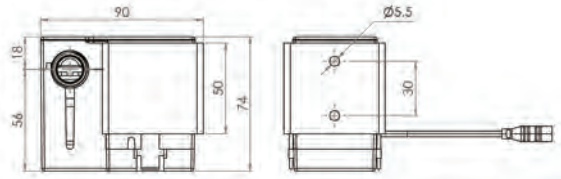

Accessories & Spare Parts



GUARDIAN[®] TAPWARE

Sensor Tapware Spare Parts



T-3MSSP-HMST-M

- Sensor Tap Transformer with 800mm Cable



T-3MSSP-HMST-M



T-3MSSP-HMST-3M

T-3MSSP-HMST-3M

- Sensor Tap Transformer with 3m Cable

T-3MSSP-HMST-BP

- Sensor Tap Battery Case and Batteries

T-3MSSP-HMST-CBS

- Sensor Tap Battery Solenoid and Case



T-3MSSP-HMST-BP



T-3MSSP-HMST-CBS

T-3MSSP-SEN6

- 6 Second Timed Flow Sensor Only for Hob or Boxed Splashback Installations

T-3MSSP-SENW6

- 6 Second Timed Flow Sensor Only for Wall Installations

T-3MSSP-SENEXT

- Pair Extension Cables to suit Sensor Range - 2m Length



T-3MSSP-SENW6




T-3MSSP-SEN6

T-3MSSP-BOSCAP

- 2x Caps with Indicators suit Sensor Range



T-3MSSP-SENEXT



T-3MSSP-BOSCAP





NSW 02 9627 6111

VIC 03 9357 6562

QLD 07 3881 0322

WA 08 6305 0681

SA 0408 299 443

ACT 0408 446 961

TAS 03 6344 7060

NT 0447 382 658

FNQ 07 4775 6956

3monkeez

www.3monkeez.com.au

sales@3monkeez.com.au